

TOOLS FOR A BETTER LIFE


Power tools and equipment,
Accessories, Hand tools

2023-2024



**FOR THE ONES
WHO NEED
SOLUTIONS**



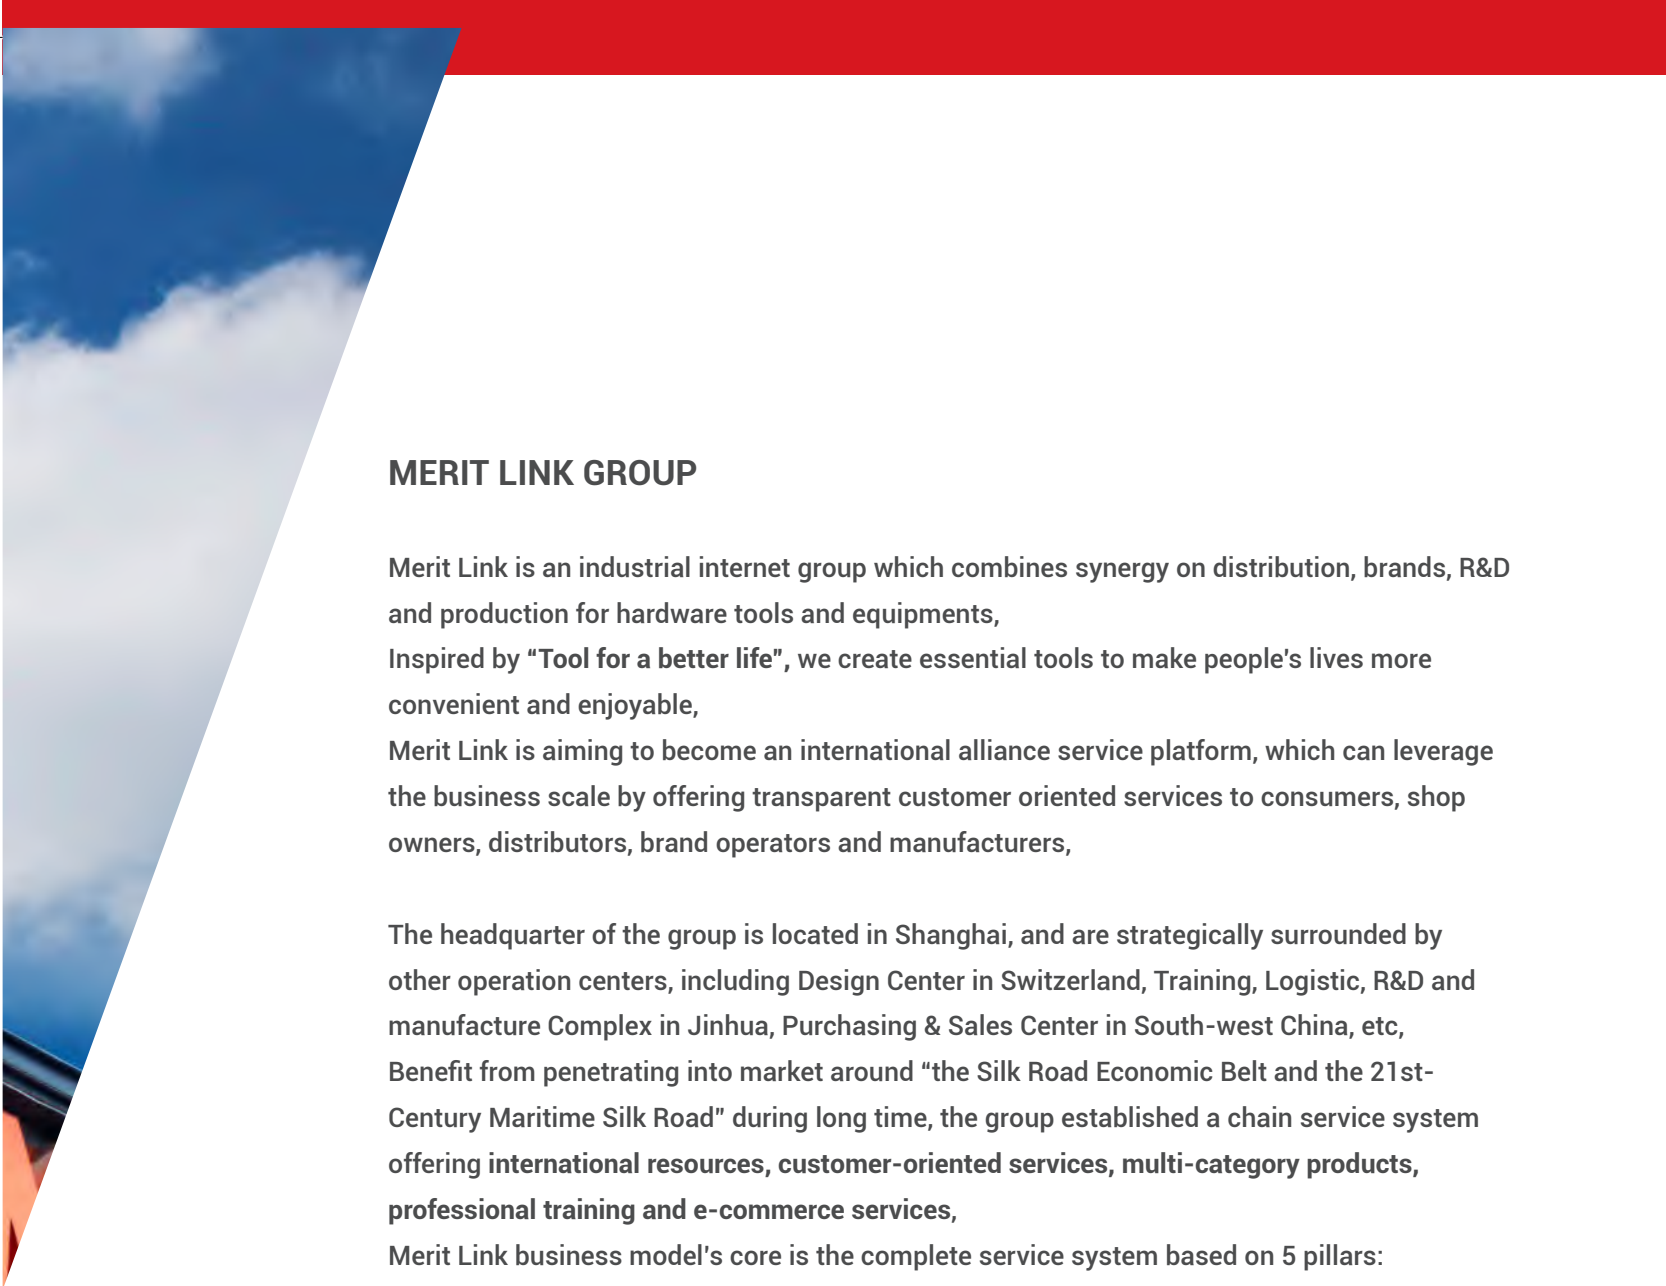

MERIT LINK GROUP

Merit Link is an industrial internet group which combines synergy on distribution, brands, R&D and production for hardware tools and equipments,

Inspired by "Tool for a better life", we create essential tools to make people's lives more convenient and enjoyable,

Merit Link is aiming to become an international alliance service platform, which can leverage the business scale by offering transparent customer oriented services to consumers, shop owners, distributors, brand operators and manufacturers,

The headquarter of the group is located in Shanghai, and are strategically surrounded by other operation centers, including Design Center in Switzerland, Training, Logistic, R&D and manufacture Complex in Jinhua, Purchasing & Sales Center in South-west China, etc, Benefit from penetrating into market around "the Silk Road Economic Belt and the 21st-Century Maritime Silk Road" during long time, the group established a chain service system offering international resources, customer-oriented services, multi-category products, professional training and e-commerce services,

Merit Link business model's core is the complete service system based on 5 pillars: warehouse, logistic and after-sales services, product training, promotion and marketing activities, talent development and e-commerce platform,

Merit Link Brands portfolio offer in house Brands, agent Brands and famous Brands,

In house portfolio includes well-known brands such as Crown, DWT, Tosan and Mytol,

Through long-time partnering with distributors in overseas markets, the group obtained strong influence in the markets such as China and South-east Asia, Middle-East and Africa, C,I,S, and Middle Europe,

Merit Link boosts its mission as "Meet the consumer`s needs with best products and services by integrating resources across the industrial chains",

With all of our brands, businesses, and people working in unison, we can create scale advantages by allocating resources more strategically and efficiently,

GENERAL INDEX

8-122 POWER TOOLS

- 8-47 Cordless tools Li-Ion**
 - 8-13 Cordless drills / screwdrivers 12-16V
- 14-23 Cordless tools Li-Ion**
 - 14-17 Cordless drills / screwdrivers
 - 17-21 Cordless impact drill / screwdrivers
 - 21 Cordless impact wrenches
 - 22 Cordless angle grinders
 - 23 Cordless rotary tools
 - 23 Cordless vacuum cleaners
 - 23 Cordless brad nailer and stapler
- 24-41 20V Max, Intelligent battery system**
 - 26 Cordless drywall screwdrivers 20V
- 26-27 Cordless drills / screwdrivers 20V**
 - 28 Cordless impact drills / screwdrivers 20V
 - 28 Cordless impact wrenches 20V
 - 28 Cordless impact screwdrivers 20V
 - 29 Cordless mixers 20V
 - 29 Cordless heavy rotary hammers 20V
 - 30 Cordless angle grinders 20V
 - 31 Cordless straight grinders 20V
 - 31 Cordless rotary tools 20V
 - 31 Cordless polishers 20V
 - 31 Brushed waxing machine 20V
 - 32 Cordless jig saw 20V
 - 32 Brushed chain saw 20V
 - 32 Cordless sabre saws 20V
 - 32 Mini polishing machine
 - 33 Cordless circular saws 20V
 - 33 Cordless shears 20V
 - 34 Cordless routers 20V
 - 34 Cordless power planers 20V
 - 34 Cordless belt sanders 20V
 - 35 Brushed round sand 20V
 - 35 Cordless soldering iron 20V
 - 35 Cordless hot air guns 20V
 - 35 Cordless blowers 20V
 - 36 Cordless vacuum cleaners 20V
 - 36 Cordless grass trimmer 20V
 - 36 Cordless air blower 20V
 - 36 Cordless chain saw 20V
 - 36 Cordless lawn mower 20V
 - 37 Cordless cleaning machine 20V
 - 37 Cordless sprayers 20V
 - 38 Cordless brad nailers 20V
 - 38 Cordless work lights 20V
- 39-40 Battery packs 20V**
 - 41 Battery chargers 20V
 - 41 USB battery chargers 20V
- 42-47 20V Max, XS battery system**
 - 43 Brushless cordless drill 20V
 - 43 Brushless impact drill 20V
 - 43 Brushless dual speed electric drill 20V
 - 43 Angle impact wrench 20V
 - 44 Brushless lithium electric impact wrench 20V
 - 44 Brushless cordless heavy rotary hammer 20V
 - 44 Brushed electric hammer 20V
 - 45 Cordless angle grinder 20V
 - 45 Brushed chain saw 20V
- 45-46 Brushless marble machine 20V**
 - 46 Brushless metal saw 20V
 - 46 Brushless electric circular saw 20V
 - 46 Cordless Hot melt glue gun 20V
 - 46 Cordless cleaning machine 20V
 - 47 Battery packs 20V
 - 47 Battery chargers 20V

48-56 Fastening & drilling

- 49 Impact wrenches
- 49-52 Drills
- 52-54 Impact drills
- 55 Low speed drills
- 55-56 Mixers

56-63 Hammering & demolition

- 56-57 Light rotary hammers
- 58-60 Heavy rotary hammers
- 60-62 Hammers
- 63 Breakers

64-83 Grinding & Polishing

- 64-77 Angle grinders
- 77 Biscuit jointers
- 78 Polishers
- 78-79 Straight grinders
- 79 Rotary tools
- 80-81 Burnishing machines
- 81-82 Bench grinders
- 82-83 Cut-off saws

83-94 Sawing & cutting

- 83 Multi-function tools
- 84 Jigsaws
- 84-85 Sabre saw
- 85 Metal shears
- 85-86 Marble saws
- 87 Circular saws
- 88 Plunge saws
- 88 Plunge saw guides
- 88 Mitre saws
- 89 Combo mitre saws
- 89-90 Slide mitre saws
- 90 Table saws
- 91-92 Magnetic drill
- 93 Bench drill
- 94 Wet diamond core drill
- 94 Wall chasers

94-97 Planing & sanding

- 94 Orbital sanders
- 95 Rotary sanders
- 96 Power planers
- 96 Belt sanders
- 96 Sander
- 97 Edge trimmers
- 97 Plunge routers

98-105 Heat, paint & blow

- 98 Hot air guns
- 99 Hot pipe welder
- 100 Hot glue guns
- 100-101 Spray guns
- 101 Drywall sanders
- 101 Air blowers
- 102-105 All-purpose vacuum cleaner

106-115 Digital measuring tools

- 106-107 Laser measures
- 108 Tile laser
- 108 Thermo detectors
- 108 Range finders
- 108-109 Digital multimeters
- 109 Digital clamp meters
- 109 Temperature / humidity meters
- 109 Sound meters
- 109 Anemometers
- 110 Light meters

- 110 Voltage detectors
- 110 Gas leak detector
- 110 Coating thickness Measurer
- 110 Wall scanner
- 111-113 Line lasers
- 114 Tripod for line lasers
- 114 Telescopic rod for line lasers
- 115 Optical levels
- 115 Tripod for optical levels
- 115 Rulers for optical levels

116-122 Car service tools

- 116-118 High pressure washers
- 119-122 Battery chargers

123-132 WELDING MACHINES

- 124 Hand-held fast spot welder
- 124 Industrial gas shielded welding
- 124 ACDC manual argon arc welding machine
- 124 Cutting machine
- 125 FLUX welding machine
- 125 MIG/MAG welding machine
- 125 Handheld MMA welding machines
- 125-129 Inverter DC MMA welding machines
- 129-130 Inverter DC TIG/MMA welding machines
- 130 Inverter Plasma cutting machines
- 130-131 Inverter MIG welding machines
- 131 Fiber laser handheld welding machine
- 131 Mini inverter dc welding machine
- 132 Welding masks

133-151 GARDEN TOOLS

134-135 Saws and tree care

- 134 Electric chainsaws
- 134-135 Gasoline chainsaws
- 135 Electric pole hedge trimmers

135-136 Grounds care

- 136 Multi-function garden tool
- 136 Gasoline brush cutters and grass trimmers
- 136 Gasoline hedge trimmers

136-151 Generators and pumps

- 136-137 Gasoline generator
- 138 Gasoline pumps
- 138 Gasoline power
- 139-140 Submersible pumps
- 140 Self-priming vortex pump
- 141-142 Vortex pumps
- 142-143 Centrifugal pumps
- 144 Jet pumps
- 145-146 Deep well pumps
- 146 Pressure controllers
- 147 Diesel welding generator
- 148 Diesel generators
- 148-151 Gasoline generators
- 151 3 in 1 Gasoline generator

152-165 AIR TOOLS

153-154 Painting and spraying

153-154 Air spray guns

155-159 Air compressors

155-156 Vehicle compressors

156 Direct air compressors

157 Belt driven air compressors

158-159 Oil-free air compressor

160-162 Car service tools

160-161 Pneumatic impact wrenches

162 Grease injectors

162-165 Nailing and cutting

162-163 Air brad nailers

163 Tyre inflators

164 Hydraulic trolley jack

164 Hydraulic engine crane

164-165 Tile cutters

165 Vibrator (handheld)

165 Concrete vibrator head

166-195 ACCESSORIES

167-168 Screwdriving

167 Screwdriver bits

167 Screwdriver bit holders

167 Nut setters

168 Screwdriver bits sets

168 HSS-G drill bits Hex shank

169-166 Drilling & demolition

169-174 Metal drill bits

174-175 Wood drill bits

175 Concrete & masonry drill bits

176-182 SDS Plus & Max drill bits

182 Glass & multi drill bits

182 Chisels

182 Hollow drill bits

183 Holesaws

183-184 Drill chucks

184-190 Cutting & grinding

184-186 Diamond discs

186-187 Diamond core bits

188-189 Cutting discs

189-190 Grinding discs

190-193 Sanding & polishing

190 Flap wheels

191-192 Sanding paper

192-193 Wire brushes

193 Polishing discs

193-195 Sawing

193-194 Circular saw blades

194-195 Jig saw blades

195 Sabre saw blades

195 General accessories

195 Supports for angle grinders

195 Supports for drills

195 Electrode holders

196-218 HAND TOOLS

197-201 Pliers

197 Hand tool household set

198 Combination pliers

198 Diagonal cutting pliers

198 Long nose pliers

198 Wire stripper

198 High leverage pliers and pliers

199 Set Internal circlip pliers

199 (straight/bent nose)

External circlip pliers

199 (straight/bent nose)

Circlip pliers set

200 Compound leverage shears

201 Locking grip pliers

(curved/straight/long jaws)

202-207 Screwdrivers

202 Slotted screwdrivers

202 Phillips screwdrivers

202 Nut spinners

202 Pozidriv screwdrivers

202 Torx screwdrivers

202 Tamper torx screwdrivers

202 Dual function screwdrivers

203-204 Screwdrivers set

205-206 Bit holder set

206-207 Precision screwdrivers sets

207 Offset key with handleset

207 Hex key sets

(standard/long/extra long)

207 Hex key sets, ball head

(standard/long/extra long)

207 Torx key sets

(standard/long/extra long)

207 Foldable hex key sets

207 Foldable hex key sets,

ball head

207 Foldable torx key sets

208-210 Wrenches

208 Combination wrenches

208 Double open end wrenches

208 Double ring wrenches

208 Ratcheting combination wrenches

209 Combination wrench set

209 Double open end wrench set

210 Double ring wrench set

210 Ratcheting combination wrench set

210 Adjustable wrenches

210 Pipe wrenches

210 Hand Tools 1/2" series sleeve set

211-213 Sockets

211 Socket sets

211 Ratchet handles

211 1/4" Hex sockets

211 3/8" Hex sockets

211 1/2" Hex sockets

211 1/2" Hex deep sockets

212 Universal joints

212 Extension bars

212 Spark plug sockets

212 Adapters

212-214 Hammers & chisels

212 Claw hammers

(fiberglass/wooden handle)

212 Mechanic's hammers

(fiberglass/wooden handle)

213 Ball peen hammers

(fiberglass/wooden handle)

213 Lump hammers

(fiberglass/wooden handle)

213 White rubber mallets

(fiberglass/wooden handle)

213 Black rubber mallets

(fiberglass/wooden handle)

214 Black & white rubber mallets

(fiberglass/wooden handle)

214 Dual rubber mallets

(fiberglass handle)

214 Dead blow mallets

214 Pointed chisel with hand guard

214 Flat chisel with hand guard

214-217 Cutting tools

214 Hack saws

215 Hand saws

215 Pruner

215 Hedge shear

215 Lopper

215 Pruning saws

215 Foldable pruning saw

215 Pipe cutters

216 Small axes

216 Bolt cutters

216 Snap-off knives

216-217 Retractable knives

217 Foldable knife

217 Snap-off blades

217 Trapezoidal blades

217-218 Measuring tools

217 Measuring tapes

(double scale/metric)

217 Open ree; fiberglass measuring tapes

218 Long fiberglass measuring tapes

218 Spirit levels

218 Clamping

218 Quick ratchet clamps

218 Standard clamps

CROWN PROFESSIONAL



CROWN was founded in 1983 and it is a world leader in tools. It has **4 factories** and operates its business in about **100 countries** around the world. **CROWN** products include **power tools, cordless tools, welding machines, garden tools, gasoline tools, hand tools and other tools** offering a full range of options.



WWW.CHINA-CROWN.COM/EN





WWW.CHINA-CROWN.COM/EN



POWER TOOLS



Cordless drill / screwdriver | CT21072HX



LONG LASTING

Stay Away From Power Outage Embarrassment

Fast charging • Wireless binding • Multiple protections



Adapter  12V

CT21072HX CT21072HBX CT21072HQX

Cordless drill / screwdriver



CT21072HX-2 BMC

- Li-Ion battery
- Spindle automatic locking
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charger



Battery capacity	2 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	19 / 30 Nm
Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max, screw diameter	6 mm
Weight	0,96 kg

POWER TOOLS

Cordless screwdriver



CT21072HBX-2 BMC

- Li-Ion battery
- Spindle automatic locking
- 1/4" hexagonal tool holder
- Step speed selection
- Electronic speed adjustment
- Variable torque
- Reverse function
- Quick charger



Battery capacity	2 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Tool holder	1/4" hexagonal
Max, torque (soft / hard)	19 / 30 Nm
Max, screw diameter	6 mm
Weight	0,85 kg

Cordless drill / screwdriver




CT21072HQX-2 BMC

- Li-Ion battery
- Spindle automatic locking
- Quick-change attachments
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charger



Battery capacity	2 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	19 / 30 Nm

ADAPTER



Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max, screw diameter	6 mm
Weight	1,01 kg

CROWN

Cordless screwdriver


CT21081HB-2 BMC*
CT21081HB-4 BMC

- Li-Ion battery
- Spindle automatic locking
- 1/4" hexagonal tool holder
- Step speed selection
- Electronic speed adjustment
- Variable torque
- Reverse function
- Quick charger*



Battery capacity	2 / 4 Ah
Battery charging time	60' 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Tool holder	1/4" hexagonal
Max, torque (soft / hard)	19 / 30 Nm
Max, screw diameter	6 mm
Weight	0,99' 1,15 kg

Cordless drill / screwdriver


CT21081H-2 BMC*
CT21081H-4 BMC

- Li-Ion battery
- Spindle automatic locking
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charge*



Battery capacity	2' 4 Ah
Battery charging time	60' 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	19 / 30 Nm
Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max, screw diameter	6 mm
Weight	1,08' 1,24 kg

Overload protection

Overheat protection

Overcharge protection

Overdischarge protection

Adapter  12V

CT21081H CT21081HB CT21081HQ

Cordless drill / screwdriver


CT21081HQ-2 BMC*
CT21081HQ-4 BMC

- Li-Ion battery
- Spindle automatic locking
- Quick-change attachments
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charger*



ADAPTER




Battery capacity	2' 4 Ah
Battery charging time	60' 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	19 / 30 Nm

Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max, screw diameter	6 mm
Weight	1,13' 1,29 kg

Strict processes

Craftsmanship, and good quality

On the go, easy to handle daily life

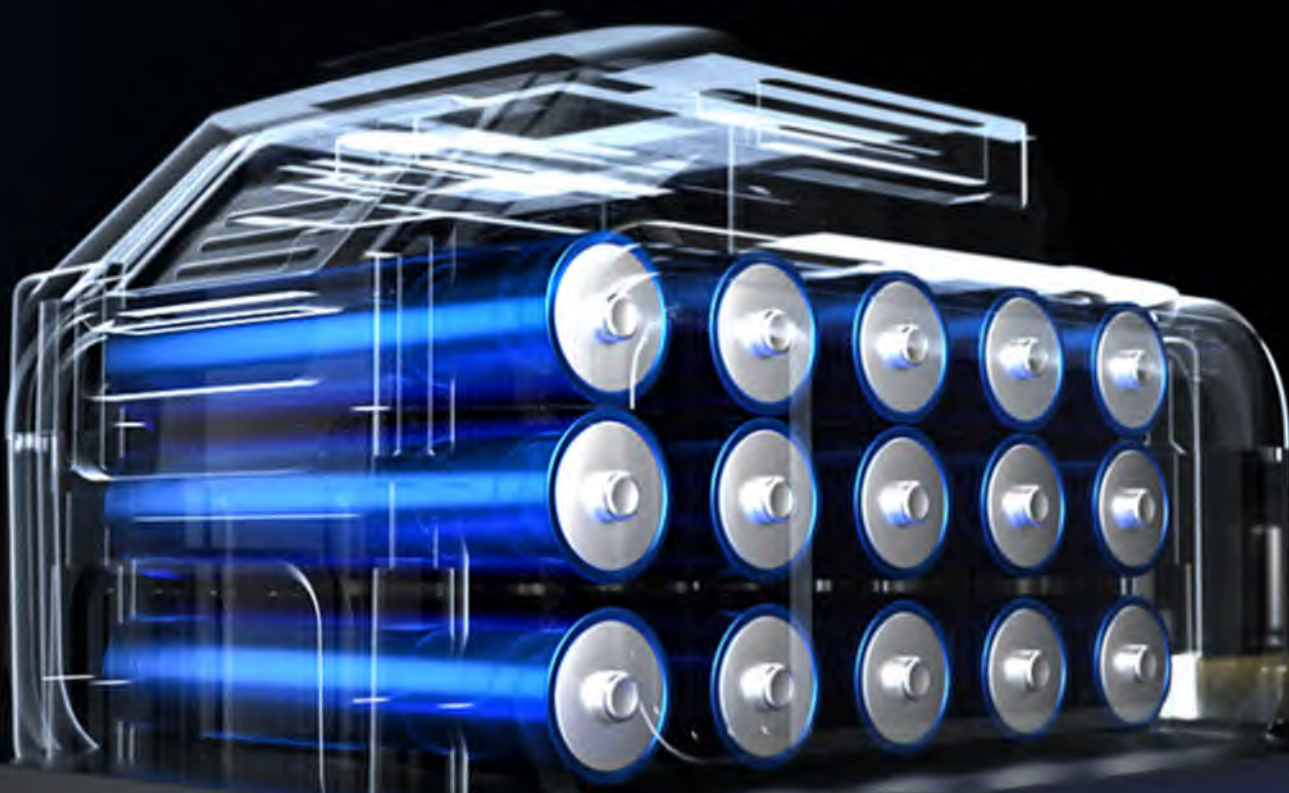

***Fast
Charging***

***Wireless
Binding***

***Long
Range***


Cordless screwdriver


CT21082HB-1,5 BMC *
CT21082HB-2 BMC **
CT21082HB-4 BMC

- Li-Ion battery
- Spindle automatic locking
- 1/4" hexagonal tool holder
- Step speed selection
- Electronic speed adjustment
- Variable torque
- Reverse function
- Quick charger */**

16 V Max,

Battery capacity	1,5* 2** 4 Ah
Battery charging time	45* 60** 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Tool holder	1/4" hexagonal
Max. torque (soft / hard)	21 / 35 Nm
Max. screw diameter	7 mm
Weight	1,16* 1,16** 1,36 kg

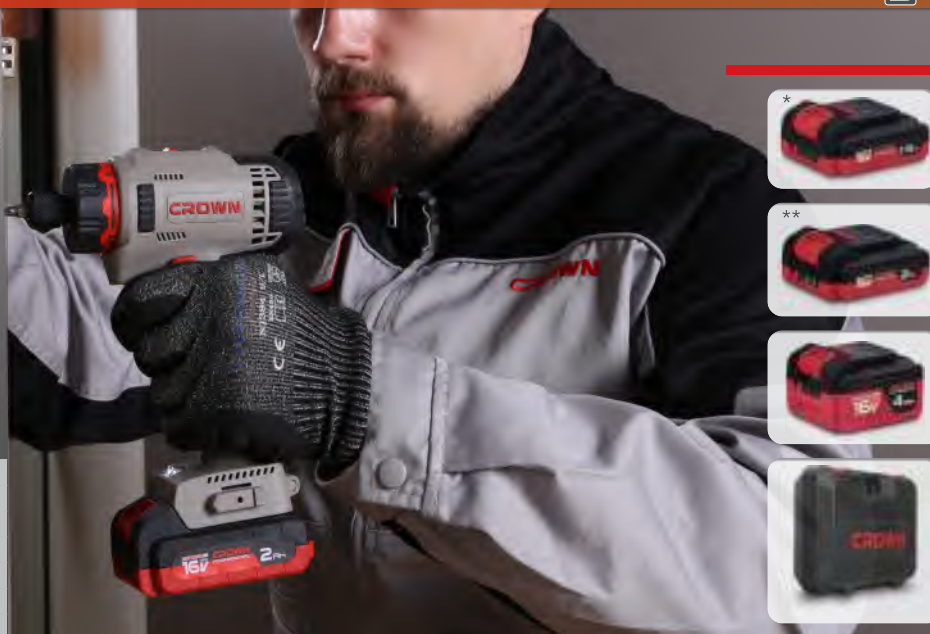

Cordless drill / screwdriver


CT21082H-1,5 BMC*
CT21082H-2 BMC**
CT21082H-4 BMC

- Li-Ion battery
- Spindle automatic locking
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charger */**

16 V Max,

Battery capacity	1,5* 2** 4 Ah
Battery charging time	45* 60** 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	21 / 35 Nm
Drilling output in steel	10 mm
Drilling output in wood	32 mm
Max. screw diameter	7 mm
Weight	1,24* 1,24** 1,44 kg



Cordless drill / screwdriver


CT21082HQ-1,5 BMC*
CT21082HQ-2 BMC**
CT21082HQ-4 BMC

- Li-Ion battery
- Spindle automatic locking
- Quick-change attachments
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Quick charger */**

16 V Max,

Battery capacity	1,5* 2** 4 Ah
Battery charging time	45* 60** 120 min
No-load speed (gear I / II)	0-380 / 0-1250 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	21 / 35 Nm
Drilling output in steel	10 mm
Drilling output in wood	32 mm
Max. screw diameter	7 mm
Weight	1,3* 1,3** 1,5 kg



Cordless drill / screwdriver


CT21092H-2 BMC
CT21092H-4 BMC*

- Li-Ion battery
- Brushless motor
- Auto-lock
- Keyless chuck
- 2 speed
- Variable torque
- Soft grip

16 V Max,

Battery capacity	2 4 Ah
Battery charging time	60 120 min
No-load speed (gear I / II)	0-420 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	30 / 50 Nm
Drilling output in steel	10 mm
Drilling output in wood	32 mm
Max. screw diameter	8 mm
Weight	1,2 kg



Cordless drill / screwdriver

CT21099HX-2 BMC

- Li-Ion battery
- Brushless motor
- Auto-lock
- Keyless chuck
- 2 speed
- Reverse rotation
- 2 functions (drilling / screwing)
- Variable torque
- Quick charge
- Soft grip



 **16 V Max,** 

Battery capacity	2 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-420 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	30 / 45 Nm

Drilling output in steel	10 mm
Drilling output in wood	32 mm
Max. screw diameter	8 mm
Weight	1,04 kg

Cordless screwdriver

B3



CT22023 BMC

- Li-Ion battery
- 1/4" hexagonal tool holder
- Reverse function
- Integrated LED light
- Soft grip


 **3,6 V**

Battery capacity	1,3 Ah
Battery charging time	3 h
No-load speed	200 min ⁻¹
Chuck tightening range	6,35 mm
Max, torque	3 Nm
Max, screw diameter	4 mm
Weight	0,39 kg

Cordless screwdriver

B3

CT22024 MC

- Li-Ion battery
- Spindle automatic locking
- 1/4" hexagonal tool holder
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Integrated LED light
- Soft grip

 **3,6 V**

Battery capacity	1,5 Ah
Battery charging time	3,5 h
No-load speed	200 min ⁻¹
Chuck tightening range	6,35 mm
Max, torque	3,5 Nm
Max, screw diameter	4 mm
Weight	0,45 kg



Cordless screwdriver

B3

CT22025

- Li-Ion battery
- Spindle automatic locking
- 1/4" hexagonal tool holder
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Integrated LED light
- Soft grip


 **3,6 V**

Battery capacity	1,3 Ah
Battery charging time	3 h
No-load speed	200 min ⁻¹
Chuck tightening range	6,35 mm
Max, torque	3 Nm
Max, screw diameter	4 mm
Weight	0,41 kg

CT22053 TB

- Compact pen holding design
- Easy control of forward and reverse rotation
- Head LED light for dark area working
- forward-reverse by electron
- Type-C charging port
- Electric quantity display


 **3,6 V**

No-load speed	260 rpm
Max, torque	5 N,m
Chuck tightening range	6,35mm

CT21052LH-1,5 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Quick charger



 **12 V**

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-400 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	17 / 25 Nm
Drilling output in steel	10 mm
Drilling output in wood	20 mm
Max, screw diameter	6 mm
Weight	1 kg

Cordless screwdriver

B3

CT22055

- Small gun design
- Easy control of forward and reverse rotation
- Head LED light for dark area working



 **3,6 V**

No-load speed	200 rpm
Max, torque	3,5 N,m
Chuck tightening range	6,35 mm

Cordless drill / screwdriver

B3

CT21053LH-1,5 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Quick charger



 **12 V**

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-400 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max, torque (soft / hard)	17 / 25 Nm
Drilling output in steel	10 mm
Drilling output in wood	20 mm
Max, screw diameter	6 mm
Weight	1 kg

Cordless drill / screwdriver

CT21055LM-1,5 BMC
CT21055LM-1,5S*

- Li-Ion battery
- Metal keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Quick charger

*sold with a single battery

**14,4 V**

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-400 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	19 / 30 Nm
Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max. screw diameter	7 mm
Weight	1,06 kg

Brush impact drill

CT21109H-1,5 BMC

- Built-in led light for work in dark areas LED
- 1 hour quick time batter charge
- Short protect & Capability show for battery
- Lithium-ion provides longer run time

**16 V**

No-load speed (gear I / II)	0-400/0-1400±10% r/min
Chuck tightening range	0,8-10 mm

CT21055L-1,5 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Quick charger

**14,4 V**

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-400 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	19 / 30 Nm
Drilling output in steel	10 mm
Drilling output in wood	28 mm
Max. screw diameter	7 mm
Weight	1,06 kg

Cordless drill / screwdriver

CT21056L-1,5 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Quick charger

18 V

Battery capacity	1,5 Ah
Battery charging time	45 min
No-load speed (gear I / II)	0-350 / 0-1350 min ⁻¹
Chuck tightening range	1,5-13 mm
Max. torque (soft / hard)	35 / 45 Nm
Drilling output in steel	13 mm
Drilling output in wood	38 mm
Max. screw diameter	8 mm
Weight	1,54 kg



Cordless drill / screwdriver

B3

CT21056LM-1,5 BMC CT21056LM-1,5S

- Li-Ion battery
- Metal keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Reverse function
- Quick charger

*sold with a single battery



18 V

Battery capacity	1,5 Ah
Battery charging time	45 min
No-load speed (gear I / II)	0-350 / 0-1350 min ⁻¹
Chuck tightening range	1,5-13 mm
Max, torque (soft / hard)	35 / 45 Nm
Drilling output in steel	13 mm
Drilling output in wood	38 mm
Max, screw diameter	8 mm
Weight	1,54 kg

CT21056L-2 BMC* CT21056L-4 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Quick charger*



18 V

Battery capacity	2* 4 Ah
Battery charging time	60* 120 min
No-load speed (gear I / II)	0-350 / 0-1350 min ⁻¹
Chuck tightening range	1,5-13 mm
Max, torque (soft / hard)	35 / 45 Nm
Drilling output in steel	13 mm
Drilling output in wood	38 mm
Max, screw diameter	8 mm
Weight	1,58* 1,88 kg

Cordless drill / screwdriver

B3

CT21074LH-2 BMC

- Li-Ion battery
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Quick charger



24 V

Battery capacity	2 Ah
Battery charging time	60 min
No-load speed (gear I / II)	0-350 / 0-1350 min ⁻¹
Chuck tightening range	1,5-13 mm
Max, torque (soft / hard)	40 / 50 Nm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Max, screw diameter	10 mm
Weight	1,63 kg

Cordless impact drill / screwdriver

B3

CT21102H-1,5S-(50)EK

- Li-Ion battery
- Keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Electronic speed
- Quick charge

* with set of 50 accessories



20 V

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed	0-450 / 0-1650 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm
Drilling output in wood	30 mm
Drilling output in concrete	8 mm
Max, screw diameter	10 mm
Weight	1,3 kg

Brushless external rotor drill

B3 PLUS

CT21118M-2 TB

- Electronic speed regulation
- emergency stop
- Built-in led light for work in dark areas LED
- Design of mechanical two speed regulation function
- With short protection, over load and locked rotor protection
- Spindle lock allows for quick and easy bit changes
- Brushless motor



24 V

Chuck tightening range	1,5-13 mm
No-load speed (gear I / II)	0-375/2100r/min
Max, torque	65N·m

CROWN

Cordless impact drill / screwdriver with set of 49 accessories



CT21100H-1,5-(49) EK

- Li-Ion battery
- Keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Electronic speed
- Quick charge

Flexible shaft

300 mm

1/4" sockets wrenches

4pcs 8 | 9 | 10 | 11 mm

Screws, plastic plugs and nails

SCREWS | 25pcs

PLUGS | 30pcs

CABLE CLIP NAILS | 5pcs

Drill bits

TWIST | 5pcs 1,5, 2, 3, 4, 5, 6 mm

TILES | 2pcs 4, 6 mm

CONCRETE | 3pcs 6, 8, 10 mm

CAC121503

Charger

BS1216LHE

Battery pack x2

CT21100H-1.5

Cordless impact drill / screwdriver



Socket adaptor

25 mm

Magnetic bit holder

50 mm

Screwdriver bits (25 mm)

3pcs SL3 (x2), SL4

5pcs T10, T15, T20, T25, T30

7pcs H2, H3, H4, H5 (x2), H6 (x2)

7pcs PZ0 (x2), PZ1 (x2), PZ2 (x2), PZ3

8pcs PH0 (x2), PH1 (x2), PH2 (x2), PH3 (x2)

12 V

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed	0-400 / 0-1350 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm

Drilling output in wood	20 mm
Drilling output in concrete	6 mm
Max, screw diameter	6 mm
Weight	1,05 kg

Cordless impact drill / screwdriver



CT21101H-2 EK

- Li-Ion battery
- Metal keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Reverse function
- LED light
- Electronic speed
- Quick charge

20 V Max,

Battery capacity	2 Ah
Battery charging time	60 min
No-load speed	0-450 / 0-1750 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in steel	13 mm
Drilling output in wood	38 mm
Drilling output in concrete	10 mm
Max, screw diameter	10 mm
Weight	1,65 kg



CROWN[®]

TOOLS FOR A BETTER LIFE

20V LI-ION **BRUSHLESS** **DRILL** CT21101H-2 BMC



20 v

Battery voltage

2.0 Ah

Battery capacity

1 h

Charging time

13 mm

Chuck capacity

50 N.m

Max torque

20+3

Torque force

0-500/0-1800 min⁻¹

No load speed

Feature:

- Torque settings(20+3)
- Tow speed setting
- Impact function setting
- Rotation left/right
- With automatic spindle lock function
- With LED battery power status indicator
- LED work light with time delay to illuminate the work area
- brushless motor

Accessories

1 pc 25mm ADA, 1 pc 50mm extended rod, 7pcs 50mm Bit(SL4/SL5/SL6/PZ0/PZ1/PZ2/PH1/PH2), 3 pcs twist drill (4/5/6/), 3 pcs cement drill(4/5/6/), 1 pc flexible tube, 9 nut drivers (5/6/7/8/9/10/11/12/13), Battery 2 PCS, Topdesk charger 1PC.

Cordless impact drill / screwdriver with set of 14 accessories



CT21102H-1,5 (14) EK

- Li-Ion battery
- Keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Electronic speed
- Quick charge

ACCESSORIES INCLUDED

CT21102H-1.5 - Cordless impact drill
 BS1218LHE-15 - Battery pack 2 pcs
 CAC20150 - Charger
 Flexible shaft - 300 mm
 Magnetic bit holder - 50 mm
 Screwdriver bits 25 mm
 (2pcs PH1, PH2 - 2pcs PZ1, PZ2 - 2pcs SL5, SL6)
 Drill bits
 (TWIST 4pcs 3,4,5,6 mm - CONCRETE 2pcs 3,6 mm)


20 V Max,

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed	0-450 / 0-1650 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm
Drilling output in wood	30 mm
Drilling output in concrete	8 mm
Max, screw diameter	10 mm
Weight	1,3 kg

Cordless impact drill / screwdriver with set of 35 accessories



CT21102H-1,5-(35) EK

- Li-Ion battery
- Keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Electronic speed
- Quick charge

Screwdriver bits (25 mm)

- ⊖ 2pcs SL3, SL4
- ☆ 5pcs T10, T15, T20, T25, T30
- ⊙ 5pcs H2, H3, H4, H5, H6
- ⊗ 4pcs PZ0, PZ1, PZ2, PZ3
- ⊕ 4pcs PH0, PH1, PH2, PH3

Hacksaw

1/4" sockets wrenches

- ⊙ 4pcs 8 | 9 | 10 | 11 mm

CAC201205

Charger

BS2018LHE-15

Battery pack x2

CT21102H-1.5

Cordless impact drill / screwdriver



Magnetic bit holder

50 mm

Socket adaptor

25 mm

Drill bits

TWIST | 2pcs 4, 6 mm
 CONCRETE | 2pcs 4, 6 mm

Screws, plastic plugs and nails

SCREWS | 25 pcs
 PLASTIC PLUGS | 30 pcs
 CABLE CLIP NAILS | 5 pcs

20 V Max,

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed	0-450 / 0-1650 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm

Drilling output in wood	30 mm
Drilling output in concrete	8 mm
Max, screw diameter	8 mm
Weight	1,3 kg

Cordless impact drill / screwdriver with set of 62 accessories



POWER TOOLS

CT21102H-1,5 -(62) EK

- Li-Ion battery
- Keyless chuck
- Spindle automatic locking
- Double speed
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)
- Electronic speed
- Quick charge

Screwdriver bits (50 mm)

- ⊖ 3pcs SL4, SL5, SL6
- ⊕ 2pcs T15, T20
- ⊕ 2pcs PZ0, PZ1
- ⊕ 3pcs PH1, PH2, PH3

Screwdriver bits (25 mm)

- ⊖ 2pcs SL3, SL4
- ⊕ 5pcs T10, T15, T20, T25, T30
- ⊕ 5pcs H2, H3, H4, H5, H6
- ⊕ 4pcs PZ0, PZ1, PZ2, PZ3
- ⊕ 4pcs PH0, PH1, PH2, PH3

Socket adaptor

50 mm

Magnetic bit holder

50 mm

CT21102H-1,5

Cordless impact drill / screwdriver

CAC201505

Charger

Drill bits

WOOD | 3pcs 14, 16, 18 mm

Flexible shaft

300 mm

Drill bits

TWIST | 10pcs 1, 1,5, 2, 2,5, 3, 4, 5, 6, 7, 8 mm
CONCRETE | 3pcs 3, 4, 5, 6, 7, 8 mm

1/4" Dr, 6PT sockets

⊖ 8pcs 5, 6, 7, 8, 9, 10, 11, 12 mm

Tape measure

3 m x 16 mm

20 V Max,

Battery capacity	1,5 Ah
Battery charging time	60 min
No-load speed	0-450 / 0-1650 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm

Drilling output in wood	30 mm
Drilling output in concrete	8 mm
Max, screw diameter	8 mm
Weight	1,3 kg

Cordless impact wrench



CT22040H-2 EK

- Li-Ion battery
- 1/2" square tool holder
- Electronic speed adjustment
- Variable torque
- Quick charge
- Integrated LED light
- Soft grip



20 V Max,

Battery capacity	2 Ah
Battery charging time	60 min
No-load speed	0-2700 min ⁻¹
Tool holder	1/2" square
Max, torque	260 Nm
Max, bolt / nut diameter	M22
Weight	1,14 kg

Cordless impact screwdriver



CT22041H-2 EK

- Li-Ion battery
- 1/4" hexagonal tool holder
- Electronic speed adjustment
- Reverse function
- Quick charge
- Integrated LED light
- Soft grip



20 V Max,

Battery capacity	2 Ah
Battery charging time	60 min
No-load speed	0-2700 min ⁻¹
Tool holder	1/4" hexagonal
Max, torque	260 Nm
Max, bolt / nut diameter	M14
Weight	1,5 kg

20V LI-ION BRUSHLESS ANGLE GRINDER

CTCT23021-125H-4 EK



20 v
Battery voltage

4.0 Ah
Battery capacity

2 h
Charging time

2 kg
Torque force

125 mm
Max torque

8000 min⁻¹
No load speed

Feature:

- Anti-self locking switch
- Brushless motor
- With LED battery power status indicator

Accessories:

- 1PC wrench, 1pc auxiliary handle
- Battery 2 PCS, Topdesk charger 1PC

Cordless cleaning machine



CT63007H-2S EK

- Wirelss convient to use
- Small size and light weight
- Multifunctional nozzle
- Anti-self-locking button, safer to use
- Body bag soft adhesive design
- Stable current

 20 V Max,

Compatible batteries	2 Ah
Hydraulic pressure	2,5 Mpa
Barrel output pressure	1,4 Mpa
Water yield	3 L/min
Nozzle settings	0° / 15° / 25° / 40° / Up / Shower
Dimensions (L x W x H)	30x23x7,6 cm
Weight	1,76 kg



watering can



CT63008

- Compact design
- Adjustable nozzle, easy control of flow and spray amplitude
- Large capacity water bottle with thickened body to meet the requirement of continuous operation for a long time
- Micro-USB charging port
- Electric quantity display
- Long press or double press to start, safe and effective to prevent misoperation



3,6 V

Water column flow	220ml/min
Atomization flow rate	120ml/min

Cordless rotary tool



CT23006

- Li-Ion battery
- Spindle lock
- Variable speed
- Soft grip



12 V


Battery capacity	1,5 Ah
Battery charging time	3-5 h
No-load speed (1-6 stages)	5000-18000 min ⁻¹
Collet inner Ø	3,2 mm
Weighted vibration	0,872 m/s ²
Weight	0,4 kg

Electric grinder



CT23027 TB

- Compact pen holding design
- Overload protection, Under current protection
- Hardened steel axle lock
- Body LED speed indicator
- Type-C charging port

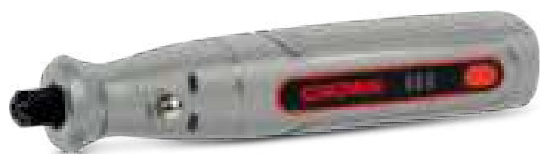

3,6 V

Cell capacity	600 mAh
Speed	5000/10000/15000 rpm

CT63006

Cordless vacuum cleaner

SMALL SIZE BIG ENERGY

Built-in high-performance motor,
6KPA suction, easy to remove hair dust



14,8 V

Battery capacity	2,2 Ah
Vacuity	6 kPa
Capacity	0,5 l
Weight	1,5 kg

POWER TOOLS

Cordless brad nailer and stapler



CT61002

- Li-Ion battery
- 2 in 1 staples / nails
- USB-C charger
- Quick charge
- Soft grip



3,6 V

Battery capacity	2 Ah
Battery charging time	60 min
Load capacity (staples / nails)	100 / 75 pcs
Staples width / length	11,4 / 4-10 mm
Nails width / length	2 / 10 mm
Wire size	18 gauge
Weight	0,65 kg

CROWN

One battery fits all.



53 Cordelss
powertools

26 Products
categories

5 Battery
packs

4 Chargers

2 USB
charger

Compatible chargers:

CAC202001X	CAC203001X	CAC204001X	CAC209001X
18 20 2 V V ^{MAX} A	18 20 3 V V ^{MAX} A	18 20 4 V V ^{MAX} A	18 20 9 V V ^{MAX} A





Scan QR-code

with your smartphone to
watch our promo video
on YouTube,



Drywall screwdriver
CT26017HX

Drill and screwdriver
CT21090HMX

Drill and screwdriver
CT21091HX

Drill and screwdriver
CT21076HMX

Drill and screwdriver
CT21076HGX

Impact drill and screwdriver
CT21075HMX

Impact drill and screwdriver
CT21093HMX

Mixer
CT26011HX

Mixer
CT26012HX

Pressure washer
CT63002HX

Impact wrench
CT22015HX

Impact screwdriver
CT22021HX

Power planer
CT24001HX

Power planer
CT24002HX

Belt sander
CT23013HX

Belt sander
CT23015HX

USB charger
CAU02X

Soldering iron
CT26016HX

Blower
CT29002HX

Vacuum cleaner
CT63001HX

Shear
CT29001HX

Work light
CT26008HX

Work light
CT26018HX

Router
CT26010HX

Brad nailer
CT61001HX

grinder
CT08HX-100
CT08HX-115
CT08HX-125

2 Ah
18650 CELLS



20 V MAX 4 Ah 18650 CELLS



20 V MAX 4 Ah 21700 CELLS

20 V MAX 5 Ah 18650 CELLS



20 V MAX 8 Ah 21700 CELLS



Hammer
CT26015HX

Cordless drywall screwdriver



CT26017HX

- Li-Ion battery
- 1/4" hexagonal tool holder
- Electronic speed control
- Reverse function
- Lock-on function
- LED light
- Belt clip
- Soft grip

Available configurations:

- CT26017HX
- CT26017HX-2
- CT26017HX-4


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-4000 min ⁻¹
Max, torques	15 Nm
Self-tapping screws max, Ø	6 mm
Weight [kg]	1,65 kg

Cordless drill / screwdriver



CT21076HMX

- Li-Ion battery
- Spindle automatic locking
- Metal keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)

Available configurations:

- CT21076HMX, CT21076HMX-2 BMC, CT21076HMX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-400 / 0-1500 min ⁻¹
Chuck tightening range	1,5-13 mm
Max, torque (soft / hard)	45 / 55 Nm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Max, screw diameter	10 mm
Weight	1,18 kg

CT21076HGX

- Li-Ion battery
- Spindle automatic locking
- Quick-change attachments
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)

Available configurations:

- CT21076HGX, CT21076HGX-2 BMC, CT21076HGX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-400 / 0-1500 min ⁻¹
Chuck tightening range	1,5-13 mm
Tool holder	1/4" hexagonal
Max, torque (soft / hard)	45 / 55 Nm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Max, screw diameter	10 mm
Weight	1,19 kg

Cordless drill / screwdriver



CT21090HMX

- Li-Ion battery
- Brushless motor
- Step speed selection
- Auto-lock
- Metal keyless chuck
- 2 speed
- Variable torque
- Soft grip

Available configurations:

- CT21090HMX, CT21090HMX-2 BMC, CT21090HMX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-500 / 0-2000 min ⁻¹
Chuck tightening range	1,5-13 mm
Max, torque (soft / hard)	50 / 75 Nm
Drilling output in steel	13 mm
Drilling output in wood	45 mm
Max, screw diameter	10 mm
Weight	1,33 kg

CT21091HX

- Li-Ion battery
- Brushless motor
- Step speed selection
- Auto-lock
- Keyless chuck
- 2 speed
- Variable torque
- Soft grip

Available configurations:

- CT21091HX, CT21091HX-2 BMC, CT21091HX-4 BMC
- CT21091HMX, CT21091HMX-2 BMC, CT21091HMX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-420 / 0-1400 min ⁻¹
Chuck tightening range	2-13 mm
Max, torque (soft / hard)	35 / 55 Nm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Max, screw diameter	8 mm
Weight	0,9 kg



CROWN[®]

TOOLS FOR A BETTER LIFE



Li-ion Battery
Spindle Automatic Locking
Metal Keyless Chuck
Step Speed Selection
Electronic Speed Adjustment
Variable Torque
2 Modes (Screwdriving / Drilling)

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-400 / 0-1500 min-1
Chuck tightening range	1,5-13 mm
Max. torque (soft / hard)	45 / 55 Nm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Max. screw diameter	10 mm
Weight	1,18 kg

Cordless impact drill / screwdriver



CT21075HMX

- Li-Ion battery
- Step speed selection
- Spindle automatic locking
- Metal keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 3 modes (screwdriving / drilling / impact drilling)

Available configurations:

• CT21075HMX, CT21075HMX-2 BMC, CT21075HMX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-400 / 0-1500 min ⁻¹
Impact rate (gear I / II)	0-6000 / 0-22500 min ⁻¹
Max. torque (soft / hard)	45 / 55 Nm
Chuck tightening range	1,5-13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	1,24 kg

Cordless impact drill / screwdriver



CT21093HMX

- Li-Ion battery
- Brushless motor
- Step speed selection
- Reverse function
- Metal keyless chuck
- Shaft lock structure
- Electronic speed adjustment
- Variable torque
- 2 modes (screwdriving / drilling)
- Soft grip

Available configurations:

• CT21093HMX, CT21093HMX-2 BMC, CT21093HMX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-500 / 0-2000 min ⁻¹
Impact rate (gear I / II)	0-7500 / 0-30000 min ⁻¹
Chuck tightening range	1,5-13 mm
Max. torque (soft/hard)	50 / 75 Nm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	45 mm
Weight	1,39 kg

Cordless impact wrench



CT22015HX

- Li-Ion battery
- Brushless motor
- 1/2" square tool holder
- Electronic speed adjustment
- Variable torque
- Reverse function
- Integrated LED light

Available configurations:

• CT22015HX, CT22015HX-2 TB, CT22015HX-4 TB
• CT22015HX-4C2 TB
20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-2100 min ⁻¹
Impact rate	3200 min ⁻¹
Tool holder	1/2" square
Max. torque	300 Nm
Max. bolt / nut diameter	M12-M22
Weight	1,14 kg

Cordless impact screwdriver



CT22021HX

- Li-Ion battery
- Brushless motor
- 1/4" hexagonal tool holder
- Electronic speed adjustment
- Variable torque
- Reverse function
- Integrated LED light

Available configurations:

• CT22021HX, CT22021HX-2 TB, CT22021HX-4 TB,
• CT22021HX-4C2 TB
20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-2100 min ⁻¹
Impact rate	3200 min ⁻¹
Max. torque	300 Nm
Tool holder	1/4" hexagonal
Max. bolt / nut diameter	M12-M22
Weight	1,13 kg



Cordless mixer



Cordless mixer



CT26011HX

- Li-Ion battery
- M14 tool holder
- 2 speed selection
- Electronic speed adjustment
- Overheat + overload protection
- Quick charge
- Soft grip

Available configurations:
• CT26011HX, CT26011HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-510 / 0-710 min ⁻¹
Max, stirrer paddle diameter	120 mm
Weight	3,18 kg

CT26012HX

- Li-Ion battery
- Brushless motor
- M14 tool holder
- 2 speed selection
- Electronic speed adjustment
- Overheat + overload protection
- Quick charge
- Soft grip

Available configurations:
• CT26012HX, CT26012HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed (gear I / II)	0-420 / 0-710 min ⁻¹
Max, stirrer paddle diameter	120 mm
Weight	3,7 kg

POWER TOOLS

Cordless heavy rotary hammer

CT28001HX

- Li-Ion battery
- Brushless motor
- SDS-Plus chuck
- Rotation speed stabilization system
- Vario-lock mode
- Anti-vibrations system
- Safety clutch

Available configurations:
• CT28001HX, CT28001HX-4 BMC



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-1400 min ⁻¹
Impact rate	0-4500 min ⁻¹
Single impact power	2,3 J
Drilling output in concrete	18 mm
Drilling output in steel	13 mm
Drilling output in wood	20 mm
Weight	2,42 kg



CROWN



Cordless angle grinder

B3 PLUS

CT23001-115HX
CT23001-125HX

- Li-Ion battery
- Brushless motor
- Soft start
- Restart protection
- Two-position on / off switch
- Safety clutch
- Quick adjustable protective casing
- Soft grip

Available configurations:

- CT23001-100HX, CT23001-100HX-4 BMC,
- CT23001-115HX, CT23001-115HX-4 BMC,
- CT23001-125HX, CT23001-125HX-4 BMC


 20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Rated speed	8000 min ⁻¹
Max, Ø of cutting disc	100 / 115 / 125 mm
Max, Ø of grinding disc	100 / 115 / 125 mm
Max, Ø of rubber sanding plate	100 / 115 / 125 mm

Max, Ø of circular wire brush	65 / 75 / 75 mm
Max, Ø of cup wire brush	65 / 75 / 75 mm
Spindle thread	M10 / M14 / M14
Weight	1,65 / 1,78 / 1,83 kg

Cordless angle grinder

B3 PLUS

CT23008-100HX
CT23008-115HX
CT23008-125HX

- Li-Ion battery
- Brushless motor
- Soft start
- Restart protection
- Two-position on / off switch
- Safety clutch

Available configurations:

- CT23008-100HX, CT23008-100HX-4 BMC,
- CT23008-115HX, CT23008-115HX-4 BMC,
- CT23008-125HX, CT23008-125HX-4 BMC


 20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Rated speed	8500 min ⁻¹
Max, Ø of cutting disc	100 / 115 / 125 mm
Max, Ø of grinding disc	100 / 115 / 125 mm
Max, Ø of rubber sanding plate	100 / 115 / 125 mm
Max, Ø of circular wire brush	65 / 75 / 75 mm

Max, Ø of cup wire brush	65 / 75 / 75 mm
Max, bore Ø	22,23 mm
Spindle thread	M10 / M14 / M14
Weight	1,8 / 1,85 / 1,9 kg

Cordless straight grinder



CT23007HX

- Li-Ion battery
- Brushless motor
- Automatic speed control
- 1-6 speed selector
- Anti-restart function
- Soft start function
- Overload protection
- Soft grip

Available configurations:
• CT23007HX, CT23007HX-4 BMC



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	12000-26000 min ⁻¹
Number of RPM stages	6
Collet diameter	6 mm
Weight	2,4 kg

Cordless rotary tool



CT23012HX

- Li-Ion battery
- Variable speed
- Wall mount option
- Overheat and overload protection

Available configurations:
• CT23012HX
• CT23012HX-2
• CT23012HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	5000-32000 min ⁻¹
Collet diameter	3,2 mm
Weight	0,85 kg

POWER TOOLS

Cordless polisher



CT23018HX

- Li-Ion battery
- Brushless motor
- M14 tool holder thread
- Velcro fixing system
- Variable speed
- Spindle lock
- Lock-on function
- Soft grip

Available configurations:
• CT23018HX, CT23018HX-4 BMC



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Rated speed	500-3000 min ⁻¹

Max, Ø of rubber plate	180 mm
Weight	1,51 kg

Brushed waxing machine



CT26015HX

- 2 side handle for comfort operate
- Comfort softgrip
- Full size 250mm buffing disc
- Velcro buffing disc

Available configurations:
• CT26015HX, CT26015HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	2500rpm
Max, Ø of rubber plate	250 mm
Weight	2,12kg

Cordless jig saw



CT25008HX

- Li-Ion battery
- Stroke rate regulation
- 4-stage pendulum
- Angular adjustment
- Saw blade easy change
- Lock-off function
- Dust extraction system
- Soft grip

Available configurations:
• CT25008HX, CT25008HX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Stroke rate at no-load	0-3000 min ⁻¹
Stroke length	21 mm
Cutting ability in wood	75 mm
Cutting ability in aluminum	18 mm
Cutting ability in steel	8 mm
Weight	2 kg

Brush reciprocating saw



CT25018HX

- LED worklight
- Easy blade change
- Electronic speed regulating switch
- Soft grip
- Large capacity lithium battery with strong endurance


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-3000 rpm
Stroke length	20 mm

HOT
B3 PLUS

CT25003HX
CORDLESS JIG SAW

- Li-Ion battery
- Brushless motor
- Saw blade easy change
- 4-stage pendulum
- Stroke rate regulation
- Break rundown
- Metal base plate

2 Ah, 4 Ah, 5 Ah, 8 Ah	700-3000 min⁻¹	26 mm
Compatible batteries	Stroke rate at no-load	Length of stroke of the saw blade
45°/45°	85/20/10 mm	2,12 kg
Max. angularity of the body (left / right)	Max. cutting ability in wood / aluminum / steel	Weight

Cordless sabre saw



CT25007HX

- Li-Ion battery
- Stroke rate regulation
- Electronic speed adjustment
- Lock-off function
- Rotating D-handle
- Soft grip

Available configurations:
• CT25007HX, CT25007HX-4 BMC


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-2800 min ⁻¹
Stroke length	26 mm
Cutting ability in wood	115 mm
Cutting ability in steel	5 mm
Cutting ability in metal pipe	60 mm
Weight	1,92 kg

Mini polishing machine



CT23019HX

- More compact, Lighter weight
- Led worklight
- Easy pad change
- Soft grip
- A variety of polishing heads are available


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-2800 min ⁻¹

Cordless circular saw

B3 PLUS

CT25002-165HX

- Li-Ion battery
- Brushless motor
- Soft start
- Break rundown
- Aluminium base plate
- Overheating and overload protection system
- High-torque indicator

Available configurations:

- CT25002-165HX,
- CT25002-165HX-4 BMC

20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	4800 min ⁻¹
Circular saw blade Ø	165 mm
Bore Ø of circular saw blade	20 mm
Max. thickness of circular saw blade	1,6 mm
Max. cutting depth by 90°	57 mm
Max. cutting depth by 45°	41 mm
Max. cutting depth by 50°	37 mm
Weight	2,92 kg



POWER TOOLS



CROWN

CORDLESS ROUTER

CT26010HX

B3 PLUS

- Li-Ion battery
- Brushless motor
- Variable speed
- Spindel lock
- Depth adjustment
- Dust extraction

Available configurations:

- CT26010HX,
- CT26010HX-4 BMC

 **20 V Max,**

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	10000-30000 min ⁻¹
Collet inner Ø	6 / 8mm (1/4" / 3/8")
Stroke of the router base	20 mm
Weight	1,34 kg

Cordless power planer

B3

CT24001HX

- Li-Ion battery
- Soft start function
- Planing depth regulator
- V-groove
- Rebating
- Safety stop
- Lock-off function
- Dust extraction system
- Soft grip

Available configurations:

- CT24001HX
- CT24001HX-4
- CT24001HX-4 BMC



 **20 V Max,**

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	16000 min ⁻¹
Planing width	82 mm
Planing depth	0-1,5 mm
Weight	2,3 kg

Cordless power planer

B3 PLUS

CT24002HX

- Li-Ion battery
- Brushless motor
- Interchangeable blades
- Soft start function
- Planing depth regulator
- V-groove
- Rebating
- Safety stop
- Overhead and overload protection
- Manual direction control for chip expulsion
- Soft grip

Available configurations:

- CT24002HX,
- CT24002HX-4 BMC



 **20 V Max,**

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	16000 min ⁻¹
Planing width	82 mm
Planing depth	0-2 mm
Weight	2,18 kg

Cordless belt sander

B3

CT23013HX

- Li-Ion battery
- Variable speed
- Lock-off function
- Dust extraction system
- Soft grip

Available configurations:

- CT23013HX,
- CT23013HX-4 BMC



 **20 V Max,**

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load belt speed	120-380 m/min
Sanding belt length	457 mm
Sanding belt width	76 mm
Weight	2,54 kg

Cordless belt sander

B3 PLUS

CT23015HX

- Li-Ion battery
- Brushless motor
- Variable speed
- Lock-off function
- Dust extraction system
- Soft grip

Available configurations:

- CT23015HX,
- CT23015HX-4 BMC



 **20 V Max,**

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load belt speed	120-380 m/min
Sanding belt length	457 mm
Sanding belt width	76 mm
Weight	2,28 kg

Brushed round sand



CT23011HX

- 6 stage speed control allows easy operation
- Integrated dust-collection system with dust bag
- Pad brake function



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	7000-11000 rpm
Sanding plate diameter	120mm

Brushed triangular sand



CT23010HX

- Compact and ergonomic design
- soft grip
- Automatic dust collection
- Strong motor power



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	7000-11000 rpm
Sanding plate diameter	145*100 mm

POWER TOOLS

Cordless soldering iron



CT26016HX

- Li-Ion battery
- Temperature protection
- Auto switch-off

Available configurations:

- CT26016HX
- CT26016HX-2
- CT26016HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Soldering bit heating time	90±15
Soldering bit heating temperature	480±10%
Weight	0,67 kg

Cordless hot air gun



CT60001HX

- Li-Ion battery
- Electronic speed control
- Temperature setting
- Temperature protection
- LED light
- LED-screen
- Tool holder hook
- Soft grip

Available configurations:

- CT60001HX, CT60001HX-2,
- CT60001HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Max, temperature	550 C°
Max, flow rate	220 l/m
Weight	0,8 kg



Cordless blower



CT29002HX

- Li-Ion battery
- 2 in 1 function (blowing / vacuuming)
- Rotational handle

- Safety switch
- Soft grip

Available configurations:

- CT29002HX, CT29002HX-2, CT29002HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Max, suction	4,5 Kpa
Max, flow rate	63,5 m/s
Weight	0,98 kg

Cordless vacuum cleaner



CT63001HX

- Li-Ion battery
- On-off switch
- Soft grip

Available configurations:
• CT63001HX, CT63001HX-2,
• CT63001HX-4


20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Max, suction	3,8 Kpa
Dust collector capability	500 ml
Weight	0,86 kg

Cordless grass trimmer



CT29012HX

- Telescopic rod, which can be extended by 35cm
- Adjustable angle sub handle
- 5th gear angle adjustment mowing head
- Suitable for people of different heights
- 90 degree side swivel for trimming


20 V Max,

Compatible batteries	4 Ah, 5 Ah, 8 Ah
Rated speed	7500 min-1
Mowing area width	305 mm /12"
Weight	1,9 kg / 4,19 lb

Cordless air blower



CT29013HX

- Lightweight and easy to use
- Adjustable wind speed
- Suitable for objects without weight
- Quick installation without tools


20 V Max,


Compatible batteries	4 Ah, 5 Ah, 8 Ah
Leerlaufdrehzahl	0-15000 rpm
Luftstrom	460 m³/h
Luftgeschwindigkeit	140 km/h
Gewicht	1,37 kg/3,02 lb

Cordless hedge trimmer



CT29015HX

- Low vibration during operation
- Low noise
- Lightweight and easy to operate
- Double knife double action

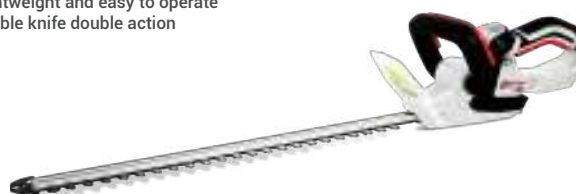
20 V Max,

Compatible batteries	4 Ah, 5 Ah, 8 Ah
No-load speed:	1200 min-1
Blade length:	51 cm /20"
Weight:	1,98 kg/4,37 lb

Cordless chain saw



CT29006HX

- Electronic brakes+mechanical brakes ensure user safety
- Automatic oil feeding
- Lightweight design
- Strong cutting ability
- Brushless motor


20 V Max,

Compatible batteries	4 Ah, 5 Ah, 8 Ah
Rated speed	4200 min-1
Saw chain speed	7,9 m/s
Oil tank capacity (for lubricate the saw chain)	115ml
Guide bar length:	254 mm / 10"
Weight:	2,8 kg / 6,17 lb

Cordless lawn mower



CT29018HX

- Adjustable handles are suitable for people of different heights
- Adjust the height of the 5th gear to meet different mowing heights (2,5cm-8cm)
- Foldable handle for easy storage
- Brushless motor
- 40L PP top grass collection bag with grass indicator
- Other functions: rear discharge, mulching and bagging


20 V *2 Max,

Compatible batteries	4 Ah, 5 Ah, 8 Ah
Rated speed	2800 /3400 min-1
Cutting width	38 cm
Alturas de corte	2,5 - 8 cm
Lawn collection box	40 L
wheel	7"/8"-18 cm /20 cm
Weight	14,67 kg /32,35lb

CORDLESS SPRAYER

B3 CT29003HX

Li-Ion battery
Pressure switch (start and stop)
Adjustable spraying mode
Metal clamp
Soft grip



Adjustable spraying shape
adjustable spraying angle
adjustable extend rod



Various spraying effects
with smooth flow



Soft grip for
comfortable holding



Wide belt with
comfortable carrying



Switch protection to lengthen
the product life cycle

Available configurations:

- CT29003HX
- CT29003HX-2
- CT29003HX-4

 20 V Max,



2Ah, 4Ah, 5Ah, 8Ah

Compatible batteries

500 ml/min

Flow rate

1,5 bar

Rated pressure

7,5 l

Water tank capacity

1,5 mm

Nozzle size

1,2 m

Flexible pipe length

50 cm

Spray rod length

2,5 kg

Weight

Cordless work light



CT26008HX

- Li-Ion battery
- Swivel head
- Soft grip
- Belt clip

Available configurations:

- CT26008HX
- CT26008HX-2S



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
LED power	3 W
Luminous flux	180-250 lm
Max, tilt angle of swivel head	270°
Weight	0,42 kg

Cordless brad nailer



CT61001HX

- Li-Ion battery
- 2 in 1 U-nail / T-nail
- Safety switch
- Adjustable impact knob
- Nail protection sleeve
- Nail full indicator window
- LED light
- Belt clip
- Soft grip

Available configurations:

- CT61001HX, CT61001HX-2,
- CT61001HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
Load capacity	100 pcs
U-nail length	15-22 mm
T-nail length	15, 20, 25, 30, 32 mm
Wire size	Ga, 18
Weight	2,7 kg

Cordless work light



CT26018HX

- Li-Ion battery
- 360° Swivel head
- 3 mode light
- Quick charge

Available configurations:

- CT26018HX
- CT26018HX-2
- CT26018HX-4



20 V Max,

Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
LED power	20 W
Luminous flux	2000-1000 lm
Max, tilt angle of swivel head	360°
Weight	1,03 kg





	CAC202001X	CAC203001X	CAC204001X	CAC209001X
	2 A 	3 A 	4 A 	9 A 
	Charging time (min)			
CAB202013X, CAB202013XE				
2 Ah 	60	45	35	35
CAB204014X, CAB204014XE				
4 Ah 	120	80	60	45
CAB204015X, CAB204015XE				
4 Ah 	120	80	60	45
CAB205014X, CAB205014XE				
5 Ah 	150	100	75	55
CAB208016X, CAB208016XE				
8 Ah 	240	160	120	50

POWER TOOLS

Battery pack



CAB202013X* CAB202013XE

Compatible chargers:

- CAC202001X
- CAC203001X
- CAC204001X
- CAC209001X



 20 V Max,



Battery capacity	2 Ah
Battery charging time (CAC209001X)	35 min
Battery charging time (CAC204001X)	60 min
Battery charging time (CAC203001X)	45 min
Battery charging time (CAC202001X)	60 min
Weight	0,37 kg

CAB204014X* CAB204014XE

Compatible chargers:

- CAC202001X
- CAC203001X
- CAC204001X
- CAC209001X



 20 V Max,



Battery capacity	4 Ah
Battery charging time (CAC209001X)	45 min
Battery charging time (CAC204001X)	60 min
Battery charging time (CAC203001X)	80 min
Battery charging time (CAC202001X)	120 min
Weight	0,68 kg

Battery pack

B3 PLUS

CAB204015X*
CAB204015XE

Compatible chargers:

- CAC202001X
- CAC203001X
- CAC204001X
- CAC209001X

4
AhSAMSUNG
SDI CELL **20 V Max,**

Battery capacity	4 Ah
Battery charging time (CAC209001X)	45 min
Battery charging time (CAC204001X)	60 min
Battery charging time (CAC203001X)	80 min
Battery charging time (CAC202001X)	120 min
Weight	0,56 kg

Battery pack

B3

CAB205014X*
CAB205014XE

Compatible chargers:

- CAC202001X
- CAC203001X
- CAC204001X
- CAC209001X

5
AhSAMSUNG
SDI CELL **20 V Max,**

Battery capacity	5 Ah
Battery charging time (CAC209001X)	55 min
Battery charging time (CAC204001X)	75 min
Battery charging time (CAC203001X)	100 min
Battery charging time (CAC202001X)	150 min
Weight	0,69 kg

Battery pack

B3 PLUS

CAB208016X*
CAB208016XE

Compatible chargers:

- CAC202001X
- CAC203001X
- CAC204001X
- CAC209001X

8
AhSAMSUNG
SDI CELL **20 V Max,**

Battery capacity	8 Ah
Battery charging time (CAC209001X)	50 min
Battery charging time (CAC204001X)	120 min
Battery charging time (CAC203001X)	160 min
Battery charging time (CAC202001X)	240 min
Weight	1 kg



Battery charger



Battery charger



CAC202001X

Compatible batteries:

- CAB202013X
- CAB202013XE
- CAB204014X
- CAB204014XE
- CAB204015X
- CAB204015XE
- CAB205014X
- CAB205014XE
- CAB208016X
- CAB208016XE



CAC203001X

Compatible batteries:

- CAB202013X
- CAB202013XE
- CAB204014X
- CAB204014XE
- CAB204015X
- CAB204015XE
- CAB205014X
- CAB205014XE
- CAB208016X
- CAB208016XE



POWER TOOLS

20 V Max,

Rated power	55 W
Output voltage	18 - 20 V Max,
Amperage at voltage 220-230 V	2 A
Battery charging time	see table page 39
Weight	0,39 kg

20 V Max,

Rated power	85 W
Output voltage	18 - 20 V Max,
Amperage at voltage 220-230 V	3 A
Battery charging time	see table page 39
Weight	0,45 kg

Battery charger



Battery charger



CAC204001X

Compatible batteries:

- CAB202013X
- CAB202013XE
- CAB204014X
- CAB204014XE
- CAB204015X
- CAB204015XE
- CAB205014X
- CAB205014XE
- CAB208016X
- CAB208016XE



CAC209001X

Compatible batteries:

- CAB202013X
- CAB202013XE
- CAB204014X
- CAB204014XE
- CAB204015X
- CAB204015XE
- CAB205014X
- CAB205014XE
- CAB208016X
- CAB208016XE



20 V Max,

Rated power	100 W
Output voltage	18 - 20 V Max,
Amperage at voltage 220-230 V	4 A
Battery charging time	see table page 39
Weight	0,5 kg

20 V Max,

Rated power	250 W
Output voltage	18 - 20 V Max,
Amperage at voltage 220-230 V	9 A
Battery charging time	see table page 39
Weight	0,93 kg

Cordless UBS charger



Cordless UBS charger



CAU01

Compatible batteries:

- CAB122011/CAB122011E
- CAB124012/ CAB124012E
- BS1403L/ BS1403LE
- CAB162008/ CAB162008E
- CAB164009/CAB164009E
- BS1804L/BS1804LE
- BS1804L-1,5/BS1804LE-1,5
- BS1817L/BS1817LE
- BS1804L-2/BS1804LE-2
- BS1818L/BS1818LE
- BS1806L/BS1806LE



CAU02X

Compatible batteries:

- CAB202013X
- CAB202013XE
- CAB204014X
- CAB204014XE
- CAB204015X
- CAB204015XE
- CAB205014X
- CAB205014XE
- CAB208016X
- CAB208016XE



12 - 18 V

Output voltage USB1 (type A)	5 V (1 A)
Output voltage USB2 (type A)	5 V (1 A)
Battery type	Lithium-ion
Weight	0,85 kg

20 V Max,

Output voltage USB1 (type A)	5 V (1 A)
Output voltage USB2 (type A)	5 V (1 A)
Battery type	Lithium-ion
Weight	0,85 kg

XS LITHIUM-ION



20V MAX



31 Cordless
powertools

21 Products
categories

3 Battery
packs

2 Chargers

Brushless cordless drill

B 3 PLUS

CT21104XS

- Brushless motor
- Spindle auto-lock
- Keyless chuck
- Step speed selection
- Electronic speed control
- Variable torque
- 2 function modes: screwdriving and drilling
- Quick charger



20 V Max,



Battery capacity	2 Ah, 4 Ah
Battery charging time	60 120 min
No-load speed (gear I / II)	0-400 / 0-1400 min ⁻¹
Chuck tightening range	0,8-10 mm
Max. torque (soft / hard)	40 / 45 Nm
Drilling output in steel	10 mm
Drilling output in wood	25 mm
Max. screw diameter	8 mm
Weight	1,31 kg

Brushless impact drill

B 3 PLUS

CT21108XS

- Handle soft leather design, reduce work fatigue
- Design of stepless speed regulating switch
- Spindle lock allows for quick and easy bit changes
- Large diameter impact gear is adopted, which has strong impact capacity and
- high efficiency
- Brushless motor

Available configurations:

- CT221108XS, CT21108XS-4 BMC



20 V Max,



Compatible batteries	2 Ah, 4 Ah, 5 Ah, 8 Ah
No-load speed	0-2200 rpm
Max. torque	12 N,m

POWER TOOLS

Brushless dual speed electric drill

B 3 PLUS

CT21110XS

- Electronic speed regulation emergency stop
- Built-in led light for work in dark areas
- Design of mechanical two speed regulation function
- With short protection, over load and locked rotor protection
- Spindle lock allows for quick and easy bit changes
- Brushless motor



20 V Max,



Battery capacity	2 Ah, 4 Ah
No-load speed (gear I / II)	0-500 / 0-1700 min ⁻¹
Collet diameter	1,5-13 mm
Max. torque (soft / hard)	70 Nm

CT21112XS

- Electronic speed regulation emergency stop
- Built-in led light for work in dark areas
- Design of mechanical two speed regulation function
- With short protection, over load and locked rotor protection
- Spindle lock allows for quick and easy bit changes
- Brushless motor



Brushless impact drill

B 3 PLUS

CT21111XS

- Electronic speed regulation emergency stop
- Built-in led light for work in dark areas
- Design of mechanical two speed regulation function
- With short protection, over load and locked rotor protection
- Spindle lock allows for quick and easy bit changes
- Brushless motor



20 V Max,



Battery capacity	2 Ah, 4 Ah
No-load speed (gear I / II)	0-500 / 0-1700 min ⁻¹
Collet diameter	1,5-13 mm
Max. torque (soft / hard)	70 Nm

20 V Max,

Battery capacity	2 Ah, 4 Ah
No-load speed (gear I / II)	0-500 / 0-1800 min ⁻¹
Collet diameter	1,5-13 mm
Max. torque (soft / hard)	120 Nm

Angle impact wrench

B3

CT22039XS

- More compact, Lighter weight,
- LED worklight
- For bolt fastening and disassembly in narrow space
- Soft grip
- Large capacity lithium battery with strong endurance

Available configurations:
• CT22039XS, CT22039XS-4 BMC


 20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	2000 rpm
Max, torque	75 N,m
Tool holder	3/8"

Brushless lithium electric impact wrench

B3 PLUS

CT22043XS

- Built-in led light for work in dark areas
- With short protect, over-load & battery level indicator
- High altitude operation is convenient to carry for strap design
- Automatic stop motion when loosen fastener
- Brushless motor


 20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	0-2800 r/min
Impact frequency	0-3200/0-3800 bpm
Max, torque forward	500 Nm
Max, torque Reverse	600 Nm
Max, bolt / nut diameter	M12-M28

CT22046XS

- Electronic brake,
- speed control switch
- torque adjustment function
- All metal gear case with oilleakage protection
- LED work light
- Compact design
- Brushless motor

Available configurations:
• CT22046XS, CT22046XS-4C2 TB


 20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	0-2800 r/min
Tool holder	12,7/ ■ 1/2
Max, torque	350 Nm
Max, bolt / nut diameter	M12-M22

Brushless cordless heavy rotary hammer

B3 PLUS

CT28010XS

- Brushless motor
- SDS PLUS chuck
- Electronic speed control
- Soft start function
- 3 function modes: drilling impact drilling and chiselling
- Vario-lock
- Rotational direction switch
- Overheat and overload protection
- Power indicator light
- Quick charger


 20 V Max,

Compatible batteries	4 Ah
No-load speed	0-1400 min ⁻¹
Impact rate	0-4500 min ⁻¹
Single impact power	1,7 J
Drilling output in concrete	18 mm
Drilling output in steel	12 mm
Drilling output in wood	25 mm
Weight	2,76 kg

Brushed electric hammer

B3 PLUS

CT28012XS

- Shock absorbing handle
- Forward and reverse dials
- Overload and locked rotor protection design
- With LED light
- Structural design of safety clutch trip


 20 V Max,

Compatible batteries	4 Ah
No-load speed	0-700 min ⁻¹
Impact frequency	0-3900 bpm
Single impact power	1,2 J
Collet diameter	16 mm

Cordless angle grinder

B3 PLUS

CT23026-100XS CT23026-115XS CT23026-125XS

- Brushless motor
- M14 spindle thread
- Soft start function
- Brake system
- 2-step switch
- Kickback protection
- Overheat and overload protection
- Quick charger



POWER TOOLS

20 V Max,

Compatible batteries	4 Ah
Rated speed	8500 min ⁻¹
Max, Ø of cutting disc	100 / 115 / 125 mm
Max, Ø of grinding disc	100 / 115 / 125 mm
Max, Ø of rubber sanding plate	100 / 115 / 125 mm
Max, Ø of circular wire brush	65 / 75 / 75 mm

Max, Ø of cup wire brush	65 / 75 / 75 mm
Max, bore Ø	22,23 mm
Spindle thread	M10 / M14 / M14
Weight	2,16 kg

Brushed chain saw

B3

CT25019XS

- Led working light
- High performance strong magnetic motor, strong power
- And long service life
- Small size, more labor-saving operation, stable
- Operation with one hand
- Cold rolled integrated forged guide plate, long service life,
- High wear-resistant chain, sharp and more durable
- Safety baffle design
- Excellent ventilation design, efficient heat dissipation,
- No burning machine



20 V Max,

Compatible batteries	2 Ah, 4 Ah
Chain speed	5 m/s
Guide plate size	4 inch

CT29011XS

- Small size, more labor-saving operation, stable
- Operation with one hand
- Cold rolled integrated forged guide plate, long service life,
- High wear-resistant chain, sharp and more durable
- Safety baffle design
- Excellent ventilation design, efficient heat dissipation,
- No burning machine



CT25020XS

- Led working light
- Brushless motor
- Small size, more labor-saving operation, stable
- Operation with one hand
- Cold rolled integrated forged guide plate, long service life,
- High wear-resistant chain, sharp and more durable
- Safety baffle design
- Excellent ventilation design, efficient heat dissipation,
- No burning machine



20 V Max,

Compatible batteries	2 Ah, 4 Ah
Chain speed	5 m/s
Guide plate size	4 inch

20 V Max,

Compatible batteries	2 Ah, 4 Ah
Chain speed	5 m/s
Guide plate size	6 inch

Brushless marble machine



CT25025XS

- Soft rubber handle for comfortable holding
- Angle adjustment, 45°
- Anti self locking switch
- Power off protection
- Strong overload resistance
- Brushless motor

Available configurations:
• CT25025XS, CT25025XS-4 BMC



20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	8000 rpm
Circular saw blade	125 mm

Brushless metal saw



CT25027XS

- Auxiliary handle
- Soft rubber handle
- Angle cut double locking
- LED light illumination
- Electric Brake Stop & Soft start design
- Brushless motor



20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	4500 rpm
Circular saw blade	140/150 mm

Brushless electric circular saw



CT25028XS

- Auxiliary handle
- Soft rubber handle
- Angle cut double locking
- 50° large cutting angle adjustment
- LED light illumination
- Electric Brake Stop & Soft start design
- Brushless motor



20 V Max,

Compatible batteries	2 Ah, 4 Ah
No-load speed	4500 rpm
Circular saw blade	165 mm
Cutting capacity	90°: 57 mm 45°: 38 mm

CT25029XS

- Comfort grip handle
- Short & over-load protection
- With battery level indicator
- Spindle lock f
- Bevel capacity from 45° to 90° for a wide variety of cut, 45-90° & Cutting depth adjustable
- Safety lock
- Design of Power-off, Overload and Rotation-blocking Protection
- Brushless motor



20 V Max,

Compatible batteries	4 Ah
No-load speed	6500 rpm
Circular saw blade	140 mm
Cutting capacity	90°: 50 mm 45°: 36 mm

Cordless Hot melt glue gun



CT62002XS

- Rapid temperature rise to 150°C in 4 minutes
- The maximum temperature can reach 200
- High glue yield 450g / h
- LED lighting LED



20 V Max,

Compatible batteries	2 Ah, 4 Ah
maximum temperature	200 C°
Glue yield	450 g/h

Cordless cleaning machine




CT63007XS

- Wireless convenient to use
- Small size and light weight
- Multifunctional nozzle
- Anti-self-locking button, safer to use
- Body bag soft adhesive design
- Stable current



20 V Max,

Compatible batteries	2 Ah, 4 Ah
Max. feed pressure (water connection)	2,5 MPa
rate of flow	3 L/min

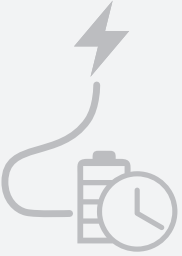	CAC202008XS	CAC202009XS
	2 A 	4 A 
Charging time (min)		
CAB2020025XS	60	35
2 Ah 		
CAB2020026XS	120	60
4 Ah 		



POWER TOOLS

Battery pack



CAB2020025XS

Compatible chargers:

- CAC202008XS
- CAC202009XS



2
Ah

SAMSUNG
SDI CELL

 20 V Max,

Battery capacity	2 Ah
Battery charging time (CAC202008XS)	60 min
Battery charging time (CAC202009XS)	35 min
Weight	0,35 kg

CAB2020026XS

Compatible chargers:

- CAC202008XS
- CAC202009XS



2
Ah

SAMSUNG
SDI CELL

 20 V Max,

Battery capacity	4 Ah
Battery charging time (CAC202008XS)	120 min
Battery charging time (CAC202009XS)	60 min
Weight	0,47 kg

Battery charger



CAC202008XS

Compatible batteries:

- CAB2020025XS
- CAB2020026XS



 20 V Max,

Rated power	55 W
Output voltage	18-20 V Max
Amperage at voltage 220-230 V	2 A
Weight	0,39 kg

CAC202009XS

Compatible batteries:

- CAB2020025XS
- CAB2020026XS



 20 V Max,

Rated power	100 W
Output voltage	18-20 V Max
Amperage at voltage 220-230 V	4 A
Weight	0,67 kg

CROWN
PROFESSIONAL

Rotary and
demolition
Range



Impact wrench



CT12018

- 1/2" square tool holder
- Reverse function
- Soft grip



900 W

Amperage at voltage 220-230 V	4,3 A
No-load speed	2100 min ⁻¹
Impact rate	2700 min ⁻¹
Max. torque	320 Nm
Tool holder	1/2" square
Min. / Max. bolt and nut diameter	M8-M24
Weight	3,5 kg



POWER TOOLS

Drill



CT10151

- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Lock-on function
- Integrated LED light
- Soft grip



230 W

Amperage at voltage 220-230 V	1 A
No-load speed (gear I / II)	0-450 / 0-1600 min ⁻¹
Turndown of rotation torque	0,7-30 Nm
Chuck tightening range	0,8-10 mm
Drilling output in steel	8 / 8 mm
Drilling output in wood	25 / 25 mm
Weight	1 kg

CT10113

- Spindle automatic locking
- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Integrated LED light



280 W

Amperage at voltage 220-230 V	1,2 A
No-load speed (gear I / II)	0-350 / 0-1400 min ⁻¹
Turndown of rotation torque	0,8-22 Nm
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 / 10 mm
Drilling output in wood	16 / 20 mm
Weight	1,36 kg

Drill



CT10152

- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 2 function modes (screwdriving / drilling)
- Reverse function
- Integrated LED light
- Soft grip



420 W

Amperage at voltage 220-230 V	1,8 A
No-load speed (gear I / II)	0-480 / 0-1800 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in steel	13 / 13 mm
Drilling output in wood	35 / 35 mm
Weight	1,62 kg

Drill / Impact drill



CT10152F

- Keyless chuck
- Step speed selection
- Electronic speed adjustment
- Variable torque
- 3 function modes (screwdriving / drilling / chiseling)
- Reverse function
- Integrated LED light
- Soft grip



420 W

Amperage at voltage 220-230 V	1,8 A
No-load speed (gear I / II)	0-480 / 0-1800 min ⁻¹
Impact rate (gear I / II)	0-7200 / 0-27000 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in steel	13 / 13 mm
Drilling output in wood	35 / 35 mm
Weight	1,66 kg



Drill

B3

CT10125

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function


 **300 W**

Amperage at voltage 220-230 V	1,35 A
No-load speed	0-3800 min ⁻¹
Chuck tightening range	0,5-6,5 mm
Drilling output in steel	6,5 mm
Drilling output in wood	13 mm
Weight	1 kg

Drill

B3

CT10125C

- Keyless chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function


 **300 W**

Amperage at voltage 220-230 V	1,35 A
No-load speed	0-3800 min ⁻¹
Chuck tightening range	0,8-6 mm
Drilling output in steel	6 mm
Drilling output in wood	13 mm
Weight	1 kg

CT10126C

- Keyless chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip


 **400 W**

Amperage at voltage 220-230 V	1,85 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm
Drilling output in wood	20 mm
Weight	1,4 kg

Drill

B3

CT10126

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip


 **400 W**

Amperage at voltage 220-230 V	1,85 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	1,5-10 mm
Drilling output in steel	10 mm
Drilling output in wood	20 mm
Weight	1,4 kg

CT10179

- Gear rim chuck
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip


 **400 W**

Amperage at voltage 220-230 V	1,8 A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	1,5-10 mm
Drilling output in steel	10 mm
Drilling output in wood	20 mm
Weight	1,2 kg

Drill

B³

CT10179C

- Keyless chuck
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip



400 W

Amperage at voltage 220-230 V	1,8A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	0,8-10mm
Drilling output in steel	10mm
Drilling output in wood	20mm
Weight	1,2 kg

CT10143-13

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip



550 W

Amperage at voltage 220-230 V	2,65 A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in steel	13 mm
Drilling output in wood	25 mm
Weight	1,42 kg

POWER TOOLS



- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip

Drill

B³

CT10143-13C

- Keyless chuck with locking function
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip



550 W

Amperage at voltage 220-230 V	2,65 A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in steel	13 mm
Drilling output in wood	25 mm
Weight	1,42 kg

Drill

B³

CT10143C

- Keyless chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip



550 W

Amperage at voltage 220-230 V	2,65 A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm
Drilling output in wood	25 mm
Weight	1,4 kg

CT10143

CT10143C

CT10143-13

CT10143-13C

PUNCHING

APPLIANCE MAINTENANCE AND INSTALLATION

METAL DRILLING

550 W

Amperage at voltage 220-230 V	2,65 A
No-load speed	0-2800 min ⁻¹
Chuck tightening range	1,5-10 mm
Drilling output in steel	10 mm
Drilling output in wood	25 mm
Weight	1,38 kg

B3 **CT10127** **DRILL** **HOT**

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip

CT10127
CT10127C
CT10127-13
CT10127-13C

PUNCHING **TAPPING** **SCREWING**

750 W

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	1,5-10 mm
Drilling output in steel	10 mm
Drilling output in wood	32 mm
Weight	1,58 kg

Drill**B3****CT10127C**

- Keyless chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip

**750 W**

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	0,8-10 mm
Drilling output in steel	10 mm
Drilling output in wood	32 mm
Weight	1,65 kg

Drill**B3****CT10127-13**

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip

**750 W**

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in steel	13 mm
Drilling output in wood	32 mm
Weight	1,69 kg

Drill**B3****CT10127-13C**

- Keyless chuck with locking function
- Variable speed
- Electronic speed adjustment
- Reverse function
- Lock-on function
- Belt clip
- Soft grip

**750 W**

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-3000 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in steel	13 mm
Drilling output in wood	32 mm
Weight	1,7 kg

Impact drill**B3****CT10128C**

- Keyless chuck with locking function
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip

**600 W**

Amperage at voltage 220-230 V	2,8 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in concrete	13 mm
Drilling output in steel	13 mm
Drilling output in wood	20 mm
Weight	1,7 kg

CROWN
TOOLS FOR A BETTER LIFE

98_{pcs} TOOLS SET
CK10-XA98

1 CT10128 Impact drill

2 Handle for impact drill | soft grip

3 Depth stop for impact drill

4 Drill bits TWIST 15pcs 2,3,4,5,6 mm MASONRY13pcs 6,8,10 mm
WOOD4pcs 4,5,6,8 mm

5 Screwdriver bits | 25 mm ± 2pcs PH1,PH2 ± 2pcs H4,H5
± 2pcs PZ1,PZ2 ± 2pcs T20,T25
± 2pcs SL4,SL6

6 Magnetic bits holder 180 mm **7 1/4"Dr.6PT sockets**
Socket adaptor | 25 mm 6pcs 5,6,8,9,10, 11 mm

8 Screws and plastic plugs **9 Adjustable wrench | 6"**
SCREWS | 30pcs ST3.5(x10),ST4(x10),ST5(x10)
PLASTIC PLUGS | 30pcs 6(x10),8(x10),10(x10)mm

10 Combination pliers | 6" **11 Slotted screwdriver | SL5x100 mm**
Phillips screwdriver | PH1x100 mm

12 Torpedo level | 230mm **13 Claw hammer | 8 oz**

14 Tape measure | 3m x 16mm **15 Plastic case**

Impact drill



CT10128

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip



POWER TOOLS

600 W

Amperage at voltage 220-230 V	2,8 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in concrete	13 mm
Drilling output in steel	13 mm
Drilling output in wood	20 mm
Weight	1,7 kg

Impact drill



CT10129

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip



750 W

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	30 mm
Weight	1,9 kg

Impact drill



CT10129C

- Keyless chuck with locking function
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip



750 W

Amperage at voltage 220-230 V	3,5 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	30 mm
Weight	1,9 kg

Impact drill



CT10130

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip


810 W

Amperage at voltage 220-230 V	3,9 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	1,5-13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	30 mm
Weight	2,1 kg

CT10130C

- Metal keyless chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip


810 W

Amperage at voltage 220-230 V	3,9 A
No-load speed	0-2800 min ⁻¹
Impact rate	0-44800 min ⁻¹
Chuck tightening range	2-13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	30 mm
Weight	2,2 kg

Impact drill



CT10032

- Gear rim chuck
- Variable speed
- Step speed selection
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip


1050 W

Amperage at voltage 220-230 V	4,9 A
No-load speed (gear I / II)	0-900 / 0-2500 min ⁻¹
Impact rate (gear I / II)	0-14400 / 0-40000 min ⁻¹
Chuck tightening range	3-16 mm
Drilling output in concrete	20/16 mm
Drilling output in steel	13/13 mm
Drilling output in wood	40/30 mm
Weight	3,4 kg

CT10034

- Gear rim chuck
- Variable speed
- Step speed selection
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip


1050 W

Amperage at voltage 220-230 V	4,8 A
No-load speed (gear I / II)	0-1200 / 0-2800 min ⁻¹
Impact rate (gear I / II)	0-44800 / 0-19200 min ⁻¹
Chuck tightening range	1,5 - 13 mm
Drilling output in concrete	16 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,8 kg

Impact drill



CT10120

- Gear rim chuck
- Variable speed
- Step speed selection
- Electronic speed adjustment
- 2 function modes (drilling / impact drilling)
- Reverse function
- Lock-on function
- Soft grip


1200 W

Amperage at voltage 220-230 V	5,5 A
No-load speed (gear I / II)	0-830 / 0-2000 min ⁻¹
Impact rate (gear I / II)	0-14400 / 0-40000 min ⁻¹
Chuck tightening range	3 -16 mm
Drilling output in concrete	35 mm
Drilling output in steel	20 mm
Drilling output in wood	50 mm
Weight	3,4 kg

Low speed drill



CT10010

- Gear rim chuck
- 2 function modes (stirring / drilling)
- Reverse function
- Lock-on function
- Soft grip



1050 W

Amperage at voltage 220-230 V	4,9 A
No-load speed	550 min ⁻¹
Chuck tightening range	3-16 mm
Drilling output in steel	16 mm
Drilling output in wood	40 mm
Max, mixing paddle diameter	130 mm
Weight	3,6 kg

Low speed drill



CT10148M

- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (stirring / drilling)
- Reverse function
- Lock-on function



1200 W

Amperage at voltage 220-230 V	5,45 A
No-load speed	0-1000 min ⁻¹
Chuck tightening range	3-16 mm
Drilling output in steel	16 mm
Drilling output in wood	40 mm
Max, mixing paddle diameter	130 mm
Weight	3,2 kg



- Gear rim chuck
- Variable speed
- Electronic speed adjustment
- 2 function modes (stirring / drilling)
- Reverse function
- Lock-on function



1200 W

Amperage at voltage 220-230 V	5,45 A
No-load speed	0-1000 min ⁻¹
Chuck tightening range	3-16 mm
Drilling output in steel	16 mm
Drilling output in wood	40 mm
Max, mixing paddle diameter	130 mm
Weight	3,2 kg

Mixer



CT10182

- M14 tool holder thread
- Soft start
- Variable speed
- Step speed selection
- Lock-on function
- Soft grip



1600 W

Amperage at voltage 220-230 V	6,9 A
No-load speed (gear I / II)	180-480 / 300-750 min ⁻¹
Tool holder	M14
Mixing paddle diameter	160 mm
Weight	4,9 kg

CT10049

- M14 tool holder thread
- Soft start
- Variable speed
- Step speed selection
- Lock-on function
- Soft grip



1100 W

Amperage at voltage 220-230 V	4,8 A
No-load speed (gear I / II)	130-450 / 245-850 min ⁻¹
Tool holder	M14
Mixing paddle diameter	120 mm
Weight	4,1 kg

Mixer



CT10153

- HEX-13 tool holder
- Variable speed
- Step speed selection
- Lock-on function
- Soft grip


1600 W

Amperage at voltage 220-230 V	7,3 A
No-load speed (gear I / II)	200-480 / 250-680 min ⁻¹
Tool holder	HEX-13
Mixing paddle diameter	120 mm
Weight	6,6 kg

Light rotary hammer



CT18180 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 3 functions mode (drilling / impact drilling / chiselling)
- Reverse function
- Vario-lock function
- Safety clutch
- Lock-on function
- Soft grip


650 W

Amperage at voltage 230 V	3 A
No-load speed	0-1800 min ⁻¹
Impact rate	0-5800 min ⁻¹
Single impact power	1,7 J
Drilling output in concrete	20 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,3 kg



Light rotary hammer



CT18181 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 3 functions mode (drilling / impact drilling / chiselling)
- Reverse function
- Vario-lock function
- Safety clutch
- Lock-on function
- Soft grip


710 W

Amperage at voltage 230 V	3,26 A
No-load speed	0-1300 min ⁻¹
Impact rate	0-5200 min ⁻¹
Single impact power	2,5 J
Drilling output in concrete	24 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,5 kg

CT10182 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 3 functions mode (drilling / impact drilling / chiselling)
- Reverse function
- Vario-lock function
- Safety clutch
- Lock-on function
- Soft grip


800 W

Amperage at voltage 230 V	3,68 A
No-load speed	0-1350 min ⁻¹
Impact rate	0-5530 min ⁻¹
Single impact power	2,8 J
Drilling output in concrete	26 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,6 kg

Light rotary hammer

B3

CT18183 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 3 functions mode (drilling / impact drilling / chiselling)
- Reverse function
- Vario-lock function
- Safety clutch
- Lock-on function
- Soft grip

 **900 W**



Amperage at voltage 230 V	4,1 A
No-load speed	0-1150 min ⁻¹
Impact rate	0-5100 min ⁻¹
Single impact power	3,2 J
Drilling output in concrete	28 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,8 kg

CT18122 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 2 functions mode (drilling / impact drilling)
- Reverse function
- Safety clutch
- Lock-on function
- Soft grip

 **800 W**



Amperage at voltage 220-230 V	3,8 A
No-load speed	0-1200 min ⁻¹
Impact rate	0-5300 min ⁻¹
Single impact power	3,4 J
Drilling output in concrete	26 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,7 kg

POWER TOOLS

Light rotary hammer

B3

CT18108 BMC

- SDS-Plus chuck
- Extra gear rim chuck with SDS PLUS adapter
- Electronic speed adjustment
- 3 functions mode (drilling / impact drilling / chiselling)
- Vario-lock mode
- Reverse function
- Safety clutch
- Lock-on function
- Soft grip

 **800 W**



Amperage at voltage 220-230 V	3,8 A
No-load speed	0-1200 min ⁻¹
Impact rate	0-5300 min ⁻¹
Single impact power	3,4 J
Drilling output in concrete	26 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,8 kg

CT18032 BMC

- SDS-Plus chuck
- Variable speed
- Electronic speed adjustment
- 3 function mode (drilling / impact drilling / chiselling)
- Vario-lock mode
- Reverse function
- Safety clutch
- Lock-on function
- Soft grip

 **850 W**



Amperage at voltage 220-230 V	3,8 A
No-load speed	0-1000 min ⁻¹
Impact rate	0-4800 min ⁻¹
Single impact power	2,2 J
Drilling output in concrete	26 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	3,2 kg

Light rotary hammer

B3

CT18211

- SDS-Plus chuck
- Electronic speed adjustment
- 3 function mode (drilling / impact drilling / chiselling)
- Vario-lock mode
- Reverse function
- Safety clutch
- Lock-on function
- Soft grip

 **800 W**



Amperage at voltage 220-230 V	3,6 A
No-load speed	0-1300 min ⁻¹
Impact rate	0-5300 min ⁻¹
Single impact power	2,8 J
Drilling output in concrete	26 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	2,7 kg

CT18212

- SDS-Plus chuck
- Electronic speed adjustment
- 3 function mode (drilling / impact drilling / chiselling)
- Vario-lock mode
- Reverse function
- Safety clutch
- Lock-on function
- Soft grip

 **900 W**



Amperage at voltage 220-230 V	4 A
No-load speed	0-950 min ⁻¹
Impact rate	0-5300 min ⁻¹
Single impact power	3,4 J
Drilling output in concrete	30 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	3 kg

Heavy rotary hammer

B3

CT18114 BMC

- SDS-Plus chuck
- 3 modes (drilling / impact drilling / chiselling)
- Anti-vibrations system
- Safety clutch
- Soft grip


850 W

Amperage at voltage 220-230 V	3,9 A
No-load speed	800 min ⁻¹
Impact rate	3400 min ⁻¹
Single impact power	4,2 J
Drilling output in concrete	28 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	4,9 kg

CT18116 BMC

- SDS-Plus chuck
- 3 modes (drilling / impact drilling / chiselling)
- Anti-vibrations system
- Safety clutch
- Soft grip


1050 W

Amperage at voltage 220-230 V	4,9 A
No-load speed	750 min ⁻¹
Impact rate	2800 min ⁻¹
Single impact power	4,8 J
Drilling output in concrete	32 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	5 kg

Heavy rotary hammer

B3

CT18187 BMC

- SDS-Plus chuck
- 3 modes (drilling / impact drilling / chiselling)
- Safety clutch


1050 W

Amperage at voltage 220-230 V	4,9 A
No-load speed	980 min ⁻¹
Impact rate	3800 min ⁻¹
Single impact power	4 J
Drilling output in concrete	28 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	3,7 kg

CT18188 BMC
CT18188 V BMC
1500 W

Amperage at voltage 220-230 V	6,5 A
No-load speed	1000 min ⁻¹ 0-1000 min ⁻¹
Impact rate	3800 min ⁻¹
Single impact power	5 J
Drilling output in concrete	32 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	4,7 kg

Heavy rotary hammer

B3

CT18158V BMC

- SDS-Plus chuck
- 3 modes (drilling / impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Soft grip


1500 W

Amperage at voltage 220-230 V	7,5 A
No-load speed	0-800 min ⁻¹
Impact rate	0-3600 min ⁻¹
Single impact power	6 J
Drilling output in concrete	36 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	5,7 kg

CT18158 BMC

- SDS-Plus chuck
- 3 modes (drilling / impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Soft grip


1500 W

Amperage at voltage 220-230 V	7,5 A
No-load speed	800 min ⁻¹
Impact rate	3600 min ⁻¹
Single impact power	6 J
Drilling output in concrete	36 mm
Drilling output in steel	13 mm
Drilling output in wood	40 mm
Weight	5,3 kg

Heavy rotary hammer



CT18118 BMC

- SDS-Max chuck
- 2 modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Soft grip



1250 W

Amperage at voltage 220-230 V	5,6 A
No-load speed	410 min ⁻¹
Impact rate	3000 min ⁻¹
Single impact power	10 J
Drilling output in concrete	40 mm
Weight	7 kg

CT18118V BMC

- SDS-Max chuck
- Variable speed
- 2 modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Soft grip



1250 W

Amperage at voltage 220-230 V	5,6 A
No-load speed	0-410 min ⁻¹
Impact rate	0-3000 min ⁻¹
Single impact power	0-10 J
Drilling output in concrete	40 mm
Weight	7 kg

CT18118
HEAVY ROTARY HAMMER
POWER 1250 W
B3

HOT

- SDS-Max chuck
- 2 modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Soft grip

1250 W

Amperage at voltage 220-230 V	5,6 A
No-load speed	410 min ⁻¹
Impact rate	3000 min ⁻¹
Single impact power	10 J
Drilling output in wood	40 mm
Weight	7 kg

Heavy rotary hammer



CT18080V BMC

- SDS-Max chuck
- Variable speed
- 2 function modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Power light indicator
- Soft grip



1250 W

Amperage at voltage 220-230 V	5,8 A
No-load speed	200-450 min ⁻¹
Impact rate	1250-2800 min ⁻¹
Single impact power	10 J
Drilling output in concrete	40 mm
Weight	7,63 kg

CT18080 BMC

- SDS-Max chuck
- 2 function modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Power light indicator
- Soft grip



1250 W

Amperage at voltage 220-230 V	5,8 A
No-load speed	450 min ⁻¹
Impact rate	2800 min ⁻¹
Single impact power	10 J
Drilling output in concrete	40 mm
Weight	7,6 kg

Heavy rotary hammer

B3

CT18215V

- SDS-Max chuck
- 2 modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Electronic constant speed
- Soft start
- Power indication light
- Service reminder light
- Soft grip



1350 W

Amperage at voltage 220-230 V	6,1 A
No-load speed	150-516 min ⁻¹
Impact rate	3000 min ⁻¹
Single impact power	13 J
Drilling output in concrete	42 mm
Weight	7,1 kg

CT18216V

- AC brushless motor
- SDS-Max chuck
- 2 modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Electronic constant speed
- Soft start
- Power indication light
- Soft grip



1500 W

Amperage at voltage 220-230 V	7,2 A
No-load speed	155-310 min ⁻¹
Impact rate	1500-3000 min ⁻¹
Single impact power	15 J
Drilling output in concrete	48 mm
Weight	9 kg

Heavy rotary hammer

B3

CT18189 BMC

- SDS-Max chuck
- Variable speed
- 2 function modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Power light indicator
- Carbon brush replacement indicator light



1500 W

Amperage at voltage 220-240 V	7,8 A
No-load speed	150-305 min ⁻¹
Impact rate	1380-2760 min ⁻¹
Single impact power	2-15 J
Chuck type	SDS-MAX
Drilling output in concrete	52 mm
Weight	8 kg

CT18190 BMC

- SDS-Max chuck
- Variable speed
- 2 function modes (impact drilling / chiselling)
- Vario-lock mode
- Anti-vibrations system
- Safety clutch
- Power light indicator
- Carbon brush replacement indicator light



1700 W

Amperage at voltage 220-240 V	8 A
No-load speed	100-220 min ⁻¹
Impact rate	1750-2150 min ⁻¹
Single impact power	5-19 J
Chuck type	SDS-MAX
Drilling output in concrete	55 mm
Weight	12 kg

Hammer

B3

CT18221

- SDS-PLUS chuck
- Vario-lock mode
- Anti-vibrations system
- Soft grip
- Power light indicator
- Large trigger switch design



950 W

Amperage at voltage 220-230 V	4,3 A
Impact rate	4300 min ⁻¹
Single impact power	5 J
Weight	4 kg

CT18208

- HEX-17 chuck
- Anti-vibrations system
- Lock-on function
- Soft grip



1300 W

Amperage at voltage 220-230 V	5,9 A
Impact rate	3900 min ⁻¹
Single impact power	12 J
Weight	5,7 kg

CROWN[®]

TOOLS FOR A BETTER LIFE

HAMMERING & DEMOLITION



Hammer



CT18208 M

- SDS-Max chuck
- Anti-vibrations system
- Lock-on function
- Soft grip


1300 W

Amperage at voltage 220-230 V	5,9A
Impact rate	3900 min ⁻¹
Single impact power	12J
Weight	6,1kg

CT18173M BMC

- SDS-Max chuck
- Lock-on function
- Soft grip


1300 W

Amperage at voltage 220-230 V	5,9 A
Impact rate	2400 min ⁻¹
Single impact power	20 J
Weight	7,5 kg

CT18172

Hammer Breaker

1600 W

- HEX-30 tool holder
- Lock-on function
- Soft grip



Amperage at voltage 220-230 V	7,9 A
Impact rate	1850 min ⁻¹
Single impact power	45 J
Weight	14,8 kg



Concrete demolition



Surface grinding



The walls were torn down

Hammer



CT18173 BMC

- HEX-17 chuck
- Lock-on function
- Soft grip


1300 W

Amperage at voltage 220-230 V	5,9 A
Impact rate	2400 min ⁻¹
Single impact power	20 J
Weight	7,5 kg

Hammer



CT18123V BMC

- SDS-Max chuck
- Impact rate regulation
- Vario-lock mode
- Anti-vibrations system
- Carbon brush replacement indicator light
- Soft grip


1500 W

Amperage at voltage 220-230 V	6,5 A
Impact rate	900-1900 min ⁻¹
Single impact power	8-25 J
Weight	10,96 kg

Breaker



CT18024 BMC

- HEX-30 tool holder
- Lock-on function
- Soft grip



1700 W

Amperage at voltage 220-230 V	7,7 A
Impact rate	1300 min ⁻¹
Single impact power	45 J
Weight	15,5 kg

CT18024S BMC

- HEX-30 tool holder
- Anti-vibrations system
- Lock-on function
- Soft grip



1700 W

Amperage at voltage 220-230 V	7,7 A
Impact rate	1300 min ⁻¹
Single impact power	45 J
Weight	15,8 kg

POWER TOOLS

Breaker



CT18178 BMC

- HEX-30 tool holder
- Lock-on function
- Soft grip



1700 W

Amperage at voltage 220-230 V	8 A
Impact rate	1500 min ⁻¹
Single impact power	50 J
Weight	14,5 kg

CT18185 BMC

- HEX-30 tool holder
- Lock-on function
- Soft grip



1700 W

Amperage at voltage 220-230 V	7,7 A
Impact rate	1500 min ⁻¹
Single impact power	45 J
Weight	13,3 kg



Hammer



CT18124 BMC

- HEX-30 tool holder
- Anti-vibrations system
- Carbon brush replacement indicator light
- Power light indicator
- Soft grip



1750 W

Amperage at voltage 220-230 V	8,7 A
Impact rate	1600 min ⁻¹
Single impact power	48 J
Weight	14,5 kg

CROWN
PROFESSIONAL

**Angle
Grinders**
Range





Angle grinder


CT13501-100R*
CT13501-100
I

- M10 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch


650 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

CT13501-115R*
CT13501-115
II

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch


650 W

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,7 kg / 1,8 kg / 1,95 kg

CT13501-125R*
CT13501-125
III

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch


650 W

Angle grinder

**CT13625-100****I**

- M10 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime


650 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	2,8 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

CT13625-115**II**

- M14 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime


650 W

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,35 kg / 1,4 kg / 1,45 kg

CT13625-125**III**

- M14 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime


650 W

Angle grinder



CT13559-100

- M10 spindle thread
- Spindle lock
- Rear switch



650 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,2 A
Max, Ø of cutting disc	100 mm
Max, Ø of grinding disc	100 mm
Max, Ø of rubber sanding plate	100 mm
Max, Ø of circular wire brush	65 mm
Max, Ø of cup wire brush	65 mm
Weight	1,75 kg

CT13503-100

- M10 spindle thread
- Spindle lock
- Rear switch



760 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	100 mm
Max, Ø of grinding disc	100 mm
Max, Ø of rubber sanding plate	100 mm
Max, Ø of circular wire brush	65 mm
Max, Ø of cup wire brush	65 mm
Weight	1,8 kg



Angle grinder

CT13499-115R*
CT13499-115

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch



720 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,3 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

I CT13499-125R*
CT13499-125

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch



720 W

II CT13499-100R*
CT13499-100

- M10 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch



720 W

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,8 kg / 1,85 kg / 1,9 kg



Angle grinder

B3

POWER TOOLS

CT13582-100

- M10 spindle thread
- Spindle lock



 **760 W**

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	100 mm
Max, Ø of grinding disc	100 mm
Max, Ø of rubber sanding plate	100 mm
Max, Ø of circular wire brush	65 mm
Max, Ø of cup wire brush	65 mm
Weight	1,5 kg

CT13613-115

- M14 spindle thread
- Spindle lock



 **760 W**

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	115 mm
Max, Ø of grinding disc	115 mm
Max, Ø of rubber sanding plate	115 mm
Max, Ø of circular wire brush	75 mm
Max, Ø of cup wire brush	75 mm
Weight	1,6 kg



Angle grinder

B3

CT13627-100

- M10 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime



 **780 W**

Rated speed	12000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	100 mm
Max, Ø of grinding disc	100 mm
Max, Ø of rubber sanding plate	100 mm
Max, Ø of circular wire brush	65 mm
Max, Ø of cup wire brush	65 mm
Weight	1,52 kg

CT13628-115

- M14 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime



 **780 W**

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	115 mm
Max, Ø of grinding disc	115 mm
Max, Ø of rubber sanding plate	115 mm
Max, Ø of circular wire brush	75 mm
Max, Ø of cup wire brush	75 mm
Weight	1,60 kg

CROWN

Angle grinder



CT13628-125

- M14 spindle thread
- Spindle lock
- Rear switch
- labyrinth dustproof design of bearing block prolong the bearing lifetime


780 W

Rated speed	12000 min ⁻¹
Amperage at voltage 220-230 V	3,5 A
Max, Ø of cutting disc	125 mm
Max, Ø of grinding disc	125 mm
Max, Ø of rubber sanding plate	125 mm
Max, Ø of circular wire brush	75 mm
Max, Ø of cup wire brush	75 mm
Weight	1,65 kg

CT13646

- M10 spindle thread
- Spindle lock
- Rear switch


800 W

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,7 A
Max, Ø of cutting disc	115 mm
Max, Ø of grinding disc	115 mm
Max, Ø of rubber sanding plate	115 mm
Max, Ø of circular wire brush	75 mm
Max, Ø of cup wire brush	75 mm
Weight	1,38 kg



Angle grinder



Angle grinder

CT13497-100R*
CT13497-100**I**CT13497-115R*
CT13497-115

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch

IICT13497-125R*
CT13497-125

- M14 spindle thread
- Soft start*
- Spindle lock
- Restart protection*
- Two-position on / off switch

III

Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,9 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,9 kg / 1,95 kg / 2 kg

CT13572-100
CT13572-100N*

I



CT13572-115
CT13572-115N*

II



CT13572-125
CT13572-125N*

III



Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	3,8 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm



Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	2,1 kg / 2,13 kg / 2,15 kg



FIRM GRINDING DISC



CT13572-100V
CT13572-100NV*

I



CT13572-115V
CT13572-115NV*

II



CT13572-125V
CT13572-125NV*

III



Rated speed	0-11000 min ⁻¹
Amperage at voltage 220-230 V	3,8 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm



Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	2,1 kg / 2,13 kg / 2,15 kg

CROWN

I



II



III





CT13502-100R*
CT13502-100

I

CT13502-115R*
CT13502-115
CT13502-115V**

II

CT13502-125R*
CT13502-125
CT13502-125V**

III



Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	4,5 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,95 kg / 2 kg / 2,05 kg



CT13567-100R*
CT13567-100
I
CT13567-115R*
CT13567-115
II
CT13567-125R*
CT13567-125
III

Rated speed	12000 min ⁻¹
Amperage at voltage 220-230 V	4,5 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	1,8 kg / 1,85 kg / 1,9 kg

CT13573-115
CT13573-115N*
CT13573-115V
CT13573-115NV*


CT13573-125
CT13573-125N*



CT13573-125V
CT13573-125NV*



CT13506-100
CT13506-100N*

CT13506-115
CT13506-115N*

CT13506-125
CT13506-125N*



Rated speed	11000 min ⁻¹
Amperage at voltage 220-230 V	5,4 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	2,2 kg / 2,4 kg / 2,4 kg

CT13506-100V
CT13506-100NV*

I

CT13506-115V
CT13506-115NV*

II

CT13506-125V
CT13506-125NV*

III



Rated speed	0-11000 min ⁻¹
Amperage at voltage 220-230 V	5,4 A
Max, Ø of cutting disc I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of grinding disc I / II / III	100 mm / 115 mm / 125 mm

Max, Ø of rubber sanding plate I / II / III	100 mm / 115 mm / 125 mm
Max, Ø of circular wire brush I / II / III	65 mm / 75 mm / 75 mm
Max, Ø of cup wire brush I / II / III	65 mm / 75 mm / 75 mm
Weight I / II / III	2,2 kg / 2,4 kg / 2,4 kg



CT13574-150
CT13574-150N*



CT13574-180
CT13574-180N*



CT13575-150D
CT13575-150DN*



CT13575-180D
CT13575-180DN*



CT13507-150
CT13507-150N*



CT13507-180
CT13507-180N*



CT13508-150D
CT13508-150DN*



CT13508-180D
CT13508-180DN*



CT13500-180
CT13500-180N*



CT13500-180S
CT13500-180NS*



CT13500-230
CT13500-230N*



CT13500-230S
CT13500-230NS*



New



CT13489-180
CT13489-180N*



CT13489-180S
CT13489-180NS*



CT13489-230
CT13489-230N*



CT13489-230S
CT13489-230NS*



Spindle lock button

Spindle design, one minutedisc change.



*** Bilateral auxiliary handle**

Safety guarantee to prevent the sparks from breaking




*** Good heat dissipation**

Cast metal gear housing
Resists heat



B3

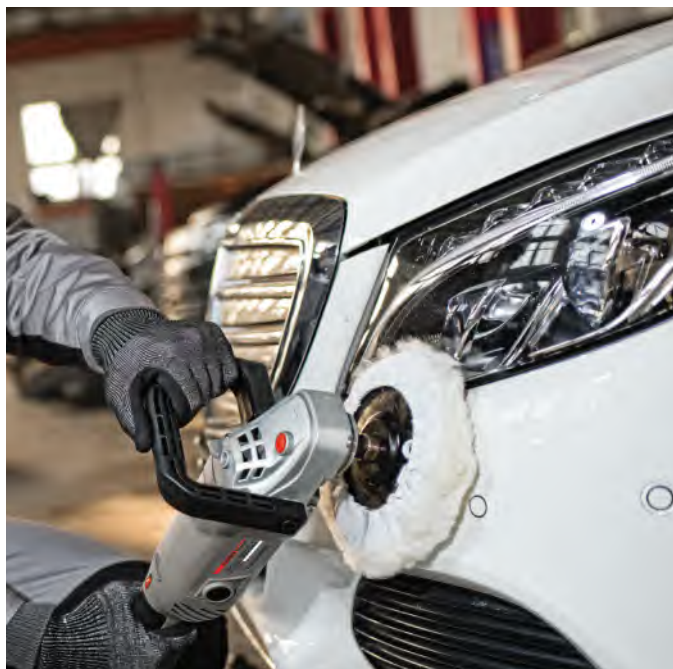

B3



HOT



B3







CAQ-P11046, CAQ-P11060, CAQ-P11080 CAQ-P110120, CAQ-P110180



Dimension Ø 110 x W 100 x Ø 19 mm
Wire Ø 1,4 mm
Max. speed 4000 min⁻¹
Weight 0,4 kg
Suitable for soft wood, aged wood
Finishing fine finishing

CAQ-L110



Dimension Ø 110 x W 100 x Ø 19 mm
Wire Ø 1,4 mm
Max. speed 4000 min⁻¹
Weight 0,4 kg
Suitable for soft wood, aged wood
Finishing fine finishing

CAQ-F11060, CAQ-F11080, CAQ-F110120



Dimension Ø 110 x W 100 x Ø 19 mm
Grit P80
Max. speed 4000 min⁻¹
Weight 0,5 kg
Suitable for metal, wood polish
Finishing fine finishing

CAQ-C110



Dimension Ø 110 x W 100 x Ø 19 mm
Grit P80
Max. speed 4000 min⁻¹
Weight 0,5 kg
Suitable for metal, wood polish
Finishing fine finishing



Dimension Ø 110 x W 100 x Ø 19 mm
 Max. speed 4000 min⁻¹
 Weight 0,4 kg
 Suitable for soft wood, aged wood
 Finishing fine finishing

CAQ-B11060



Dimension Ø 110 x W 100 x Ø 19 mm
 Grit P60
 Max. speed 4000 min⁻¹
 Weight 0,5 kg
 Suitable for metal
 Finishing rough finishing





Amperage at voltage 220-230 V	10,6 A
Max, Ø of cutting disc	355 mm
No-load speed	3900 min ⁻¹
Bore Ø of cutting disc	25,4 mm
Max, thickness of cutting disc	3,5 mm
Maximum size of cut-off workpiece:	-
● workpiece (Ø; cutting at 0° / 45°)	130 / 110 mm
■ workpiece (L × H; cutting at 0° / 45°)	115 x 115 / 90 x 90 mm
■ workpiece (L × H, cutting at 0° / 45°)	205 x 95 / 100 x 85 mm
L workpiece (L × H, cutting at 0° / 45°)	140 x 140 / 85 x 85 mm
Weight	18,25 kg



Amperage at voltage 220-230 V	10,3 A
Max, Ø of cutting disc	355 mm
No-load speed	3800 min ⁻¹
Bore Ø of cutting disc	25,4 mm
Max, thickness of cutting disc	3,5 mm
Maximum size of cut-off workpiece:	-
● workpiece (Ø; cutting at 0° / 45°)	110 / 90 mm
■ workpiece (L × H; cutting at 0° / 45°)	95 x 95 / 90 x 90 mm
■ workpiece (L × H, cutting at 0° / 45°)	70 x 180 / 60 x 110 mm
L workpiece (L × H, cutting at 0° / 45°)	95 x 95 / 90 x 90 mm
Weight	14,5 kg



Multi-function tool



Jigsaw

B3

CT15212

- Stroke rate regulation
- 4-stage pendulum
- Angular adjustment
- Saw blade easy change
- Lock-on function
- Dust extraction system

550 W



Jigsaw

B3

CT15189



B3

CT15263





B3



B3



B3







CROWN[®]

TOOLS FOR A BETTER LIFE

- Cutting Depth Adjustment
- Angular Adjustment
- Dust Extraction System
- Spindle Lock
- Lock-off Function
- Soft Grip

CIRCULAR SAW

CT15188

1500 W **B3**

Amperage at voltage 220-230V

6.8 A

No-load speed

5500 min⁻¹

Max. / min. Ø of circular saw blade

190 / 185 mm

Bore Ø of circular saw blade

20 mm

Max. thickness of circular saw blade

2 mm

Max. cutting depth by 90°

63,5 mm

Max. cutting depth by 45°

44 mm

Weight

4,4 kg







CROWN

TOOLS FOR A BETTER LIFE

MITRE SAW

CT15262

B3

Angular Adjustment

Mitre Angular Adjustment

Both-sided Table Extensions

• Spindle lock • Clamping device • Carriage position
• Dust extraction system • Soft grip

RATED POWER	1800 W
Voltage at 230V	8 A
No-load speed	5500 min ⁻¹
Circular saw blade Ø	255 mm
Circular saw blade bore Ø	25,4 mm
Max. thickness of circular saw blade	2,8 mm
Max. cutting depth at 90° (H x W)	70 x 340 mm
Max. cutting depth at 45° (H x W)	70 x 300 mm
Max. cutting depth at 0°/42° (H x W)	48 x 135 mm
Max. cutting depth at 45°/90° (H x W)	48 x 95 mm
Weight	10,6 kg





1800 W





HOT



CROWN®
TOOLS FOR A BETTER LIFE

HOT

CT32038 BMC
MAGNETIC DRILL

B3

- Internal cooling
- 2 functions: coring drill + twist drill function
- High precision aluminum guide
- Mesh line enveloped rotor
- Thickened magnetic base, steel plate

1100 W rated power	6 A Ampereage at voltage	200-750 min⁻¹ No-load speed
16 mm Max. Ø twist drill bit	12-35 mm Max. Ø hollow drill bit	9000 N Magnet retention force
		11,1 kg Weight

CROWN®
TOOLS FOR A BETTER LIFE

CT32042 BMC

MAGNETIC DRILL



- Variable speed
- High precision aluminum guide
- Mesh line enveloped rotor
- Thickened magnetic base, steel plate

1700 w rated power **7.6 A** 220-230 V Amperage at voltage **200-650 min⁻¹** No-load speed **28 mm** Max. Ø twist drill bit

M6-M20 Tapping range **13500 N** Magnet retention force **MT3** Tool holder **20,5 kg** Weight

B3



B3



B3







CT32027

3200 W

- WATER SEAL STRUCTURE
- MECHANICAL CLUTCH
- HIGH POWER MOTOR
- ERGONOMICS DESIGN

15 A
AMPERAGE AT VOLTAGE 230 V

2100 W
POWER OUTPUT

750 MIN⁻¹
NO-LOAD SPEED

50HZ
FREQUENCY

I
SECURITY TYPE

260 MM
MAX. DIAMOND CORE DRILL Ø

1-1/4"
CONNECTING THREAD OF DIAMOND CORE DRILL

21 KG
WEIGHT

STRONG POWER
HOCKEY IS DURABLE
STABLE PERFORMANCE





New



HOT







Plunge router B3 CT11001

High quality motor	Strong heat dissipation	Insulated switch	Connection of base plate	Adjustable scale	External carbon brush

Variable speed	Ampereage at voltage 220-230 V	9 A
Self start	No-load speed	8000-23000 min-1
Rotation speed stabilization system	Collet inner Ø	12 mm
Speed adjustment	Stroke of the router base	60 mm
Spindle lock	Weight	5,3 kg
Plunge depth control system		
Lock-on function		
Dust extraction system		

RATED POWER 2100W

- 3-step regulator
- Cool stage
- Temperature protection
- Possibility of steady-state use



Amperage at voltage 220-230 V	„8 A
Temperature (stage I / II / III)	50 / 450 / 550 °C
Air flow (stage I / II / III)	250 / 250 / 500 l/min
Weight	0,7 kg

- 3-step regulator
- Cool stage
- Temperature setting
- Temperature protection
- Possibility of steady-state use
- Rear D-handle
- Soft grip



Amperage at voltage 220-230 V	8,7 A
Temperature (stage I / II / III)	50 / 50-600 / 50-600 °C
Air flow (stage I / II / III)	250 / 250 / 500 l/min
Weight	0,9 kg

- 2-step regulator
- Cool stage
- Air flow adjustment
- Temperature setting
- Temperature protection
- Possibility of steady-state use
- LED-screen



Amperage at voltage 220-230 V	8,7 A
Temperature (stage I / II)	50 / 50-650 °C
Air flow (stage I / II)	250-500 / 250-500 l/min
Weight	0,9 kg

CROWN®
TOOLS FOR A BETTER LIFE

HEAT GUN CT19007



★ BMC



•Cool stage •Temperature protection •Soft grip

RATED POWER 150 / 150-1900 / 250-2000 W

Amperage at voltage 220-230 V	8,6 A
Temperature (stage I / II / III)	50 / 50-600 / 50-600 °C
Air flow (stage I / II / III)	350 / 350 / 500 l/min
Weight	0,8 kg

Hot pipe welder



CT19029 MC

- Aluminum handles
- Wider and thicker heating plate, finished and with copper holes
- Finishing heating socket
- Single-layer teflon spray paint
- Adjustable temperature
- Provides seamless fusion of different tubes



2000 W

Rated Voltage	220-240 V
Amperage at voltage working temperature	9 A
Die head size	0-300 °C
Weight	20-63 mm
	1,49 kg

Hot pipe welder

B3

CT19030 MC

- PP handles
- Wider and thicker heating plate, finished and with copper holes
- Finishing heating socket, more closely fit the heating plate
- Single-layer teflon spray paint, anti-blocking heating socket
- Adjustable temperature
- Provides seamless fusion of different tubes



 **800 W**

Rated Voltage	220-240V
Amperage at voltage	3,4A
working temperature	0-300°C
Die head size	20-32mm
Weight	0,69 kg

CT19031 MC

- PP handles
- Wider and thicker heating plate, finished and with copper holes
- Finishing heating socket, more closely fit the heating plate
- Single-layer teflon spray paint, anti-blocking heating socket
- Adjustable temperature
- Provides seamless fusion of different tubes



 **800 W**

Rated Voltage	220-240V
Amperage at voltage	3,6A
working temperature	0-300°C
Die head size	20-63mm
Weight	0,77kg



POWER TOOLS

Hot pipe welder

B3

CT19032 MC

- PP handles
- Wider and thicker heating plate, finished and with copper holes
- Finishing heating socket, more closely fit the heating plate
- Single-layer teflon spray paint, anti-blocking heating socket
- Adjustable temperature
- Provides seamless fusion of different tubes



 **800 W**

Rated Voltage	220-240V
Amperage at voltage	3,5A
working temperature	0-320°C

Die head size	20-63mm
Weight	0,77 kg

Hot pipe welder

B3

CT19035

- PP handles
- Wider and thicker heating plate, finished and with copper holes
- Finishing heating socket, more closely fit the heating plate
- Single-layer teflon spray paint, anti-blocking heating socket
- Adjustable temperature
- Provides seamless fusion of different tubes
- Body switch, easy to operate



 **800 W**

Rated Voltage	220-240V
Amperage at voltage	3,4A
working temperature	0-300°C

Die head size	20-32mm
Weight	0,69 kg

CROWN

Hot glue gun



CT19026

- Overload protection
- Soft grip


30 W

Input voltage	100-240 V
Warm up time	3 min
Glue flow rate	4-7 g/min
Glue stick Ø	7
Weight	0,196 kg

CT19027

- Overload protection
- Soft grip


60 W

Input voltage	100-240 V
Warm up time	3 min
Glue flow rate	10-12 g/min
Glue stick Ø	11
Weight	0,312 kg

Hot glue gun



CT19028

- Overload protection
- Soft grip


100 W

Input voltage	100-240 V
Warm up time	3 min
Glue flow rate	14-16 g/min
Glue stick Ø	11
Weight	0,312 kg

Spray gun



CT31012

- Variable paint flow
- Soft grip


80 W

Amperage at voltage 220-230 V	0,8 A
Flow rate	250 ml/min
Max, spraying pressure	140 bar
Max, viscosity	40 DIN-s
Nozzle Ø	0,8 mm
Reservoir capacity	700 ml
Weight	1,57 kg

Spray gun



CT31013

- Variable paint flow
- Adjustable nozzle
- Easy fill
- Safety cleaning
- Soft grip


400 W

Amperage at voltage 220-230 V	1,5 A
Flow rate	800 ml/min
Max, spraying pressure	0,1 - 0,2 bar
Max, viscosity	70 DIN-s
Nozzle Ø	2/2,5/3 mm
Reservoir capacity	900 ml
Weight	1,5 kg

CT31014
CT31014M*

- Variable paint flow
- Adjustable nozzle
- Easy fill
- Safety cleaning
- Built-in station
- Metal tank*
- Soft grip


600 W

Amperage at voltage 220-230 V	2,5 A
Flow rate	1000 ml/min
Max, spraying pressure	0,1 - 0,3 bar
Max, viscosity	100 DIN-s
Nozzle Ø	2,5 mm
Reservoir capacity	900 ml
Weight	2,9 kg

Spray gun



CT31015

- Variable paint flow
- Adjustable nozzle
- Easy fill
- Safety cleaning
- Built-in station
- Soft grip



1200 W

Amperage at voltage 220-230 V	4,5 A
Flow rate	1100 ml/min
Max, spraying pressure	0,1 - 0,3 bar
Max, viscosity	150 DIN-s
Nozzle Ø	2/2,5/3 mm
Reservoir capacity	900 ml
Weight	5,1 kg

Drywall sander



CT13609

- Velcro system
- Variable speed
- Lock-on function
- Dust extraction system
- LED light
- Soft grip



750 W

Amperage at voltage 220-230 V	3,2 A
No-load speed	1300-2500 min ⁻¹
Sanding plate Ø	180 mm
Weight	3,9 kg



POWER TOOLS

Drywall sander



CT13608 BMC

- Velcro system
- Variable speed
- Lock-on function
- Flexible head
- Dust extraction system
- LED light
- Soft grip



750 W

Amperage at voltage 220-230 V	3,2 A
No-load speed	1000-1600 min ⁻¹
Sanding plate Ø	215 mm
Weight	4,1 kg



Air blower




CT17013

- 2 function modes (blower / vacuum cleaner)
- Lock-on function


550 W

Amperage at voltage 220-230 V	2,4 A
No-load speed	15000 min ⁻¹
Air flow rate	3,5 m ³ /min
Weight	1,55 kg

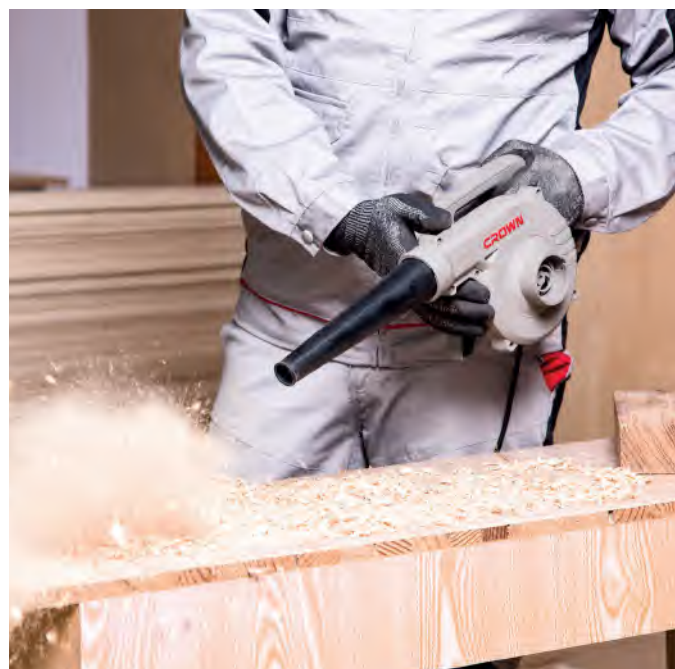

Air blower



CT17010

- 2 function modes (blower / vacuum cleaner)
- Possibility of steady-state use
- Lock-on function


710 W

Amperage at voltage 220-230 V	3,08 A
No-load speed	14000 min ⁻¹
Air flow rate	4 m ³ /min
Weight	1,6 kg

CT17010V

- Variable speed
- 2 function modes (blower / vacuum cleaner)
- Possibility of steady-state use
- Lock-on function


710 W

Amperage at voltage 220-230 V	3,08 A
No-load speed	0-14000 min ⁻¹
Air flow rate	0-4 m ³ /min
Weight	1,6 kg

Air blower



CT17010V-A

- Variable speed
- 2 function modes (blower / vacuum cleaner)
- Possibility of steady-state use
- Lock-on function


710 W

Amperage at voltage 220-230 V	3,08 A
No-load speed	0-14000 min ⁻¹
Air flow rate	0-4 m ³ /min
Weight	1,6 kg

CROWN®

TOOLS FOR A BETTER LIFE

ALL-PURPOSE VACUUM CLEANER

CT42027

1400 W

- Wet/dry function
- 30L capacity



All-purpose vacuum cleaner

B3

CT42028

- Wet/dry function
- 60L capacity

1400 W



Amperage at voltage 220-230 V	6,3 A
Voltage / frequency	220-230 V / 50-60 Hz
Vacuity	16 kPa
Air flow rate	31,6 L/s
Capacity	60 L
Weight	15,3 kg

All-purpose vacuum cleaner

B3

CT42029

- Wet/dry function
- Suction power 2-step adjustment
- 80L capacity

2000 W



Amperage at voltage 220-230 V	9 A
Voltage / frequency	220-230 V / 50-60 Hz
Vacuity	18 kPa
Air flow rate	41 L/s
Capacity	80 L
Weight	27,4 kg

All-purpose vacuum cleaner

B3

CT42030

- Wet/dry function
- Suction power 2-step adjustment
- 80L capacity

3000 W



Amperage at voltage 220-230 V	13,6 A
Voltage / frequency	220-230 V / 50-60 Hz
Vacuity	18 kPa
Air flow rate	50 L/s
Capacity	80 L
Weight	30 kg

CT42031

- Wet/dry function
- Suction power 2-step adjustment
- 100L capacity

3000 W



Amperage at voltage 220-230 V	13,6 A
Voltage / frequency	220-230 V / 50-60 Hz
Vacuity	17 kPa
Air flow rate	50 L/s
Capacity	100 L
Weight	31,5 kg

POWER TOOLS

All-purpose vacuum cleaner



CT42032F

- Triple outlet air cleaning system
- Wet/dry function
- Air blowing mode
- Suction power adjustment
- Possibility to connect other power tools
- HEPA-filter cleaning
- 30L capacity



1600 W

Amperage at voltage 220-230 V	7,2 A
Voltage / frequency	220-230 V / 50-60 Hz
Vacuity	18 kPa
Air flow rate	33 L/s
Capacity	30 L
Weight	16,5 kg



All-purpose vacuum cleaner



CT42033

- Wet/dry function
- 30L capacity
- AC 230-240V socket



1400 W

Voltage / frequency	220-240 V / 50-60 Hz
Vacuity	17 kPa
Air flow rate	31,6 L/s
Capacity	30 L
Cord length	4,5 m
Weight	10,1 kg

All-purpose vacuum cleaner



CT42034

- Wet/dry function
- 30L capacity
- AC 230-240V socket



1400 W

Voltage / frequency	220-240 V / 50-60 Hz
Vacuity	17 kPa
Air flow rate	28,5 L/s
Capacity	30 L
Cord length	4,5 m
Weight	8 kg

CT42035

- Wet/dry function
- 30L capacity
- AC 230-240V socket



1400 W

Voltage / frequency	220-240 V / 50-60 Hz
Vacuity	17 kPa
Air flow rate	31,6 L/s
Capacity	60 L
Cord length	4,5 m
Weight	13,1 kg

All-purpose vacuum cleaner



POWER TOOLS

CT42045

- Wet/dry function
- Air blowing mode
- 15L capacity



1000 W

Amperage at voltage 220-240 V	4,3 A
Frequency	50-60 Hz
Vacuity	>16 kPa
Air flow rate	1,7 m³/min
Capacity	15 l
Weight	4,6 kg

CT42046

- Wet/dry function
- Air blowing mode
- 20L capacity



HOT

1000 W

Amperage at voltage 220-240 V	4,3 A
Frequency	50-60 Hz
Vacuity	>16 kPa
Air flow rate	1,7 m³/min
Capacity	20 l
Weight	5,4 kg

VACUUM CLEANERS

CT42055

Suction Power Adjustment

3L Capacity

1800 W

SUPER POWER

Amperage at voltage 220-240 V	7,8 A
Frequency	50-60 Hz
Vacuity	≥21 kPa
Air flow rate	1,75 l/s
Capacity	3 L
Weight	4,5 kg



Laser measure

B3

CT44028

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Built-in level
- LCD screen



0,05 m - 40 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,089 kg

CT44029

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Built-in level
- LCD screen



0,05 m - 60 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,089 kg



Laser measure

B3

CT44030

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Built-in level
- LCD screen



0,05 m - 80 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,089 kg

CT44031

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Built-in level
- LCD screen



0,05 m - 100 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser grade	class II
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,089 kg

CT44032

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



0,05 m - 40 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser grade	class II
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,107 kg

Laser measure

B3

CT44033

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



0,05 m - 60 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,107 kg

CT44034

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



0,05 m - 80 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,107 kg

CT44035

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



0,05 m - 100 m

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,107 kg

Laser measure



CT44066

- Laser class 2
- Suitable for Outdoor / Indoor applications
- Pythagorean function
- Able to store up to 10 measured data
- Maximum/minimum measurement, area calculation, volume
- calculation, add and subtract function, time delay measurement
- Self illuminated large LCD display



Measuring accuracy	±3 mm
Laser wave length	635 nm
Laser class	II, <1 mW
Battery type	2 x 1,5V AAA
Weight	0,07 kg

CT44067

- Laser class 2
- Suitable for Outdoor / Indoor applications
- Pythagorean function
- Able to store up to 10 measured data
- Maximum/minimum measurement, area calculation, volume
- calculation, add and subtract function, time delay measurement
- Self illuminated large LCD display



Measuring accuracy	±2 mm
Laser wave length	520 nm
Laser class	II, <1 mW
Battery type	3,7 V Li-ion 980 mAh
Weight	0,12 kg

Laser measure



CT44113

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	class II
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,083 kg

CT44115

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser grade	class II
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,083 kg

Laser measure



CT44125

- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Built-in level
- LCD screen



Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser class	II, <1 mW
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,089 kg



LASER MEASURE

HOT

Using technology to change measurement methods

CT44112



- Laser class 2
- Units selection
- Type of measure
- Reference point
- Calculating
- Memory
- Level sensor
- LCD screen



Length



Area



Volume

Applicable scenarios



Traffic planning



Warehouse logistics



Engineering construction



House acceptance

Measuring accuracy	±2 mm
Time of single measurement	0,25 s
Laser type	650 nm
Laser grade	class II
Operating temperature range	0 ... +40 °C
Storage temperature range	-20 ... +65 °C
Battery type	2 x 1,5V AAA
Weight	0,083 kg

Tile laser



Thermo detector



Thermo detector



CT44116 TB

- Red laser beam
- Laser class 2
- 2 lines projection mode
- Dual bubble level



30 m

Measuring accuracy	±4 mm/m
Laser type	635 nm
Operating temperature range	-10 ... +45 °C
Storage temperature range	-20 ... +70 °C
Battery type	2 x AAA
Weight	0,25 kg

CT44036

- Laser class 2
- Units selection
- Backlight
- LCD screen



-50 °C ~ +400 °C

Measuring accuracy < 0°C	±3°C
Measuring accuracy > 0°C	±1,5°C
Discreteness	0,1°C (0,1°F)
Repeatability	1°C (1%)
Distance to the object : measuring range	12 : 1
Operating temperature range (humidity)	10%-90%
Battery type	2 x 1,5V AAA
Weight	0,116 kg

CT44037

- Laser class 2
- Units selection
- Backlight
- LCD screen



-50 °C ~ +600 °C

Measuring accuracy < 0°C	±3°C
Measuring accuracy > 0°C	±1,5°C
Discreteness	0,1°C (0,1°F)
Repeatability	1°C (1%)
Distance to the object : measuring range	12 : 1
Operating temperature range (humidity)	10%-90%
Battery type	2 x 1,5V AAA
Weight	0,116 kg

Range finder



CT44038

- Laser class 2
- LCD display
- Zoom
- Operation mode



600 m

Magnification	6x
Measurement unit	M/Yd
Laser class	II
Laser wavelength	905 nm
Objective lens diameter	24 mm
Battery type	AAA
Dimensions (LxWxH)	104 x 81 x 42 mm

CT44039

- Laser class 2
- LCD display
- Zoom
- Operation mode

1200 m



Magnification	6x
Measurement unit	M/Yd
Laser class	II
Laser wavelength	905 nm
Objective lens diameter	24 mm
Battery type	AAA
Dimensions (LxWxH)	104 x 81 x 42 mm

Digital multimeter



CT44051

- AC/DC Voltage
- DC Current
- Resistance
- Diode test
- NCV test
- Transistor test
- Continuity test
- Torch light

600 V

Voltage AC: max volt	600 V
Voltage AC: max resolution	1000 mV
Voltage DC: max volt	600 V
Voltage DC: max resolution	0,1 mV
Current DC: max amps	10 A
Current DC: max resolution	1 µA
Resistance: max resistance	20 MΩ
Resistance: max resolution	0,1 Ω
Weight	0,22 kg



Digital multimeter



CT44052

- AC/DC Voltage
- AC/DC Current
- Resistance
- Capacitance
- Frequency
- Temperature
- Diode test
- NCV test
- Torch light



750 V

Voltage AC: max volt	750 V
Voltage AC: max resolution	0,1 mV
Voltage DC: max volt	1000 V
Voltage DC: max resolution	0,1 mV
Current AC: max amps	20 A
Current AC: max resolution	0,1 μ A
Current DC: max amps	20 A
Current DC: max resolution	0,1 μ A
Resistance: max resistance	60 M Ω
Resistance: max resolution	0,1 Ω
Capacitance: max capacitance	100 mF
Capacitance: max resolution	0,001 nF
Frequency: max frequency	10 MHz
Frequency: max resolution	0,001 Hz
Temperature range	-20°C - + 1000°C

Digital clamp meter



CT44053

- AC/DC Voltage
- AC Current
- Resistance
- Diode test
- NCV test
- Continuity test
- Torch light
- Max value



600 V

Voltage AC: max volt	600 V
Voltage AC: max resolution	1 mV
Voltage DC: max volt	600 V
Voltage DC: max resolution	0,1 mV
Current AC: max amps	600 A
Current AC: max resolution	1 mA
Resistance: max resistance	20 M Ω
Resistance: max resolution	0,1 Ω
Pliers opening	25 mm

Temperature and humidity meter



CT44096

- LCD Screen backlight
- Dual mode: temperature and humidity meter
- Compact and portable device
- Low power energy saving



AAA 1,5 V

Humidity working range	0~100,0% RH
Accuracy of humidity measurement	$\pm$ 5%
Temperature working range	-10~60 °C / 14~40 °F
Accuracy of temperature measurement	$\pm$ 1 °C / $\pm$ 2 °F
Response time	1 sec
Auto power off	5 min
Weight	0,12 kg

Sound meter



CT44097

- LCD Screen backlight
- High sensitivity microphone
- Auto range conversion
- Compact and portable device
- Low power energy saving



AAA 1,5 V

Rate response frequency	31,5 Hz / 8 KHz
Sound level measurement	30 dB / 130 dB
Sound level accuracy	$\pm$ 1,5 dB
Sampling time (slow / fast)	1000 ms / 125 ms
Weight	0,12 kg

Anemometer



CT44098

- LCD Screen backlight
- Compact and portable device
- Low power energy saving



AAA 1,5 V

Wind speed working range	0-30 m/s
Accuracy of wind speed measurement	$\pm$ 5% rdg
Temperature working range	-10~50 °C / 14~122 °F
Accuracy of temperature measurement	$\pm$ 2 °C / $\pm$ 4 °F
Response time	0,5 sec
Auto power off	5 min
Weight	0,12 kg

Light meter



CT44108

- LCD Screen backlight
- Compact and portable device
- Low power energy saving



AAA 1,5 V

Illumination working range	0~199'999
Accuracy of Illumination measurement (0~9999 Lux)	±4%rdg + 8dgts
Accuracy of Illumination measurement (≥10000 Lux)	±5%rdg + 10dgts
Response time	0,5 sec
Auto power off	5 min
Weight	0,12 kg

Voltage detector



CT44092

- Vibration function
- Audible indicator (buzzer)
- Low voltage mode and high voltage mode
- Spotlight flashlight
- 2 meter drop protection



2xAAA 1,5 V

AC voltage range	24 V / 1000 V
Frequency range	50 Hz / 60 Hz
IP rating	IP67
Operating temperature	0~40 °C
Storage temperature	-20~50 °C
Humidity working range	≤80% (non-condensing)
Weight	0,072 kg

Gas leak detector



CT44122

- Hd display
- Sensitive and responsive
- Extended flexible probe, can be deformable
- Sound and light vibration alarm



Range	0-100000umol/mol (measured by methane)
Display tolerance	±10%+50umol/mol (methane)
Alarm point	Settable: Default low alarm
point	500umol/mol
Default high alarm point	2000umol/mol
Responses time	T < 30s
Battery type	DC3,7V(2000mAh)

Voltage detector



CT44093

- Audible indicator (buzzer)
- Magnetic solenoid testing
- Low voltage mode and high voltage mode
- Spotlight flashlight
- 2 meter drop protection



2xAAA 1,5 V

AC voltage range	24 V / 1000 V
Frequency range	50 Hz / 60 Hz
IP rating	IP67
Operating temperature	0~40 °C
Storage temperature	-20~50 °C
Humidity working range	≤80% (non-condensing)
Weight	0,072 kg

Coating thickness Measurer



CT44123

- Large screen display
- Machine inversion data can be automatically reversed
- Limit warning can be set



Measuring range: magnetic	0-1700µm
Non-magnetic	0-1700µm
Resolution	0,01um@(0-9,99um)0,1um@ (10-99,9um)1um@(100-1700um)
Indication error	±(2+2%*H)um@(0-500um)±(2,5%*H) (500-1700um)
Min measuring area	25x25mm
Min curvature:Convexity	5mm;concave 30mm
Min substrate thickness	Magnetic material 0,2mm;Non Magnetic material 0,05mm

Wall scanner



CT44095 TB

- Color TFT screen
- Non magnetic metal detector
- Metal detector
- Live wire detector
- Wood detector
- Compact and portable device
- Li-Ion battery



300 mAh

Max, deep measurement of ferrous metal	100 mm
Max, deep measurement of non-ferrous metal	80 mm
Max, deep measurement of copper wire (≥4 mm²)	40 mm
Max, deep measurement of wood	38 mm
Operating temperature	-10~40 °C
Storage temperature	-20~60 °C
Humidity working range:	
- metal mode	0~85%RH
- AC mode	0~30%RH
- wood mode	0~60%RH
Weight	0,2 kg



Line laser



CT44022 BMC

- Green laser
- High class OSRAM Diode
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Precise rotation
- Integrated tripod



1V, 1H

Levelling accuracy at 7m	±1 mm
Working range	30 m
Power supply	3,7 V Li-Ion
Tripod Thread	5/8 "
Weight	1,03 kg

CT44023 BMC

- Green laser
- High class OSRAM Diode
- 3 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Precise rotation
- Integrated tripod



2V, 1H

Levelling accuracy at 7m	±1 mm
Working range	30 m
Power supply	3,7 V Li-Ion
Tripod Thread	5/8 "
Weight	1,04 kg

CT44024 BMC

- Green laser
- High class OSRAM Diode
- 5 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Precise rotation
- Integrated tripod



4V, 1H

Levelling accuracy at 7m	±1 mm
Working range	30 m
Power supply	3,7 V Li-Ion
Tripod Thread	5/8 "
Weight	1,04 kg

Line laser



CT44046

- Red laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Smart button



1V, 1H

Laser wavelength	635 nm
Levelling accuracy	±3 mm/10 m
Self-leveling range	±4°
Working range	15 m
Battery type	4x AA
Operation Temperature	-10°C~40°C
Weight	0,26 kg

CT44047

- Green laser
- High class OSRAM Diode
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Smart button



1V, 1H

Laser wavelength	520 nm
Levelling accuracy	±3 mm/10 m
Self-leveling range	±4°
Working range	30 m
Battery type	4x AA
Operation Temperature	-10°C~40°C
Weight	0,26 kg

CT44059

- Green laser
- Laser class 2
- 1V, 1x360°H lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Shield warning function and use for tilt purpose
- Continuous/pulse laser mode
- 1/4" screw thread for tripod connection
- Additional bracket (accessory)



1V, 1x360°H

Laser wavelength	515 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±2,5°
Power supply	4xAA or Li-Ion or adapter
Weight	0,6 kg



DETAILED PARAMETERS		
3 x 360° Lines (lines)	±3° Self-leveling range	-10°C~40°C Operation temperature
515 nm Laser wavelength	30 m Shooting range	1.03 kg Weight
±2 mm/10 m Levelling accuracy	3.7V Li-Ion 4000 mAh Battery type	



Line laser



CT44060



- Green laser
- Laser class 2
- 3x360° lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Shield warning function ancuse for tilt purpose
- Continuous/pulse laser mode
- Base 5/8" and 1/4" screw thread for tripod connection
- Additional bracket (accessory)



3 x 360° - 2V, 1H

Laser wavelength	515 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion or adapter
Weight	0,88 kg

CT44061



1V, 1H

- Green laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Form front cross laser line
- 1/4" screw thread for tripod connection
- Elevating Magnetic bracket available as accessory

Laser wavelength	515 nm
Levelling accuracy	±0,2 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion
Weight	0,3 kg

Line laser



CT44062



1V, 1H

- Red laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Form front cross laser line
- 1/4" screw thread for tripod connection
- Elevating Magnetic bracket available as accessory

Laser wavelength	635 nm
Levelling accuracy	±0,2 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion
Weight	0,3 kg

CT44063



4V, 1H

- Green laser
- Laser class 2
- 5 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- 360° rotation with fine adjustable knobs
- 5/8" screw thread for tripod connection

Laser wavelength	515 nm
Levelling accuracy	±0,2 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion or adapter
Weight	1,15 kg

Line laser



CT44064



4V, 1H

- Green laser
- Laser class 2
- 5 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- 360° rotation with fine adjustable knobs
- 5/8" screw thread for tripod connection

Laser wavelength	520 nm
Levelling accuracy	±0,2 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion or adapter
Weight	1,43 kg

CT44065



- Red laser
- Laser class 2
- 3x360° projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Shield warning function and use for tilt purpose
- Continuous/pulse laser mode
- Base 5/8" and 1/4" screw thread for tripod connection
- Additional bracket included



3 x 360° - 2V, 1H

Laser wavelength	635 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±3°
Power supply	4xAA or Li-Ion or adapter
Weight	0,88 kg

Rotary line laser

CT44068



- Red laser
- Laser class 2
- 2x360° rotary mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Applications up to Ø240 m
- Adjustable rotation speed
- Shockproof design with rubber protection
- 5/8" screw thread for tripod connection
- Additional bracket (accessory)



2 x 360° - Rotary mode

Laser wavelength	635 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±3°
Rotation speed	800/500/200 RPM
Power supply	Ni-MH recharge, or 4xAA
Weight	1,5 kg

Line laser

CT44071 TB



1V, 1H

- Red laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Continuous/pulse laser mode
- 1/4" screw thread for tripod connection

Laser wavelength	635 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±4°
Self-leveling time	≤4 sec
Working range	15 m
Temperature working range	-10°~+50°
Power supply	3,7 V 1000 Mah Li-Ion
Weight	0,206 kg

CT44072 TB



1V, 1H

- Green laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Continuous/pulse laser mode
- 1/4" screw thread for tripod connection

Laser wavelength	520 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±4°
Self-leveling time	≤4 sec
Working range	30 m
Temperature working range	-10°~+50°
Power supply	3,7 V 1000 Mah Li-Ion
Weight	0,206 kg

POWER TOOLS

Line laser

CT44073 TB



1V, 1x360

- Green laser
- Laser class 2
- 2 lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Suitable for Outdoor / Indoor applications
- Continuous/pulse laser mode
- 1/4" screw thread for tripod connection

Laser wavelength	520 nm
Levelling accuracy	±0,3 mm/m
Self-leveling range	±4°
Self-leveling time	≤4 sec
Working range	30 m
Temperature working range	-10°~+50°
Power supply	3,7V 2000 Mah Li-Ion
Weight	0,276 kg

CT44088-R TB

- Green laser
- High class OARAM diode
- 3x360 lines projection mode
- Automatic self-levelling
- Remote control



2V-1H, 3x360

Laser wavelength	520 nm
Levelling accuracy	±3 mm at 10 m
Self-leveling range	±4°
Self-leveling time	≤4 sec
Working range	30 m
Temperature working range	-10°~+50°
Power supply	3,7V 4000 Mah Li-Ion
Weight	1,2 kg



Line laser

CT44091-R IMC

- Green laser beam
- High class OSRAM Diode
- 4 x 360° projection mode
- Automatic self-levelling
- Unlevelled light signal
- Levelling unit locking
- Outdoor using
- Remote control



2V-2H, 4x360

Laser wavelength	520 nm
Levelling accuracy (V / H)	±1,5 mm at 5 m / ±1 mm at 5 m
Self-leveling range	±4°
Self-leveling time	≤4 sec
Working range	30 m
Temperature working range	-10°~+40°
Power supply	3,7V 4000 Mah Li-Ion
Weight	1,3 kg

CT44118



1V, 1x360H°

- Red laser
- Laser class 2
- 1V, 1x360°H lines projection mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Smart button



Laser wavelength	520 nm
Levelling accuracy	±1,5mm/5m
Self-leveling range	±4°
Working range	30 m
Power supply	3,7 V Li-Ion 4000 Mah
Weight	0,44 kg

CT44117



1x360H°

- Red laser
- Laser class 2
- 1x360°H rotary mode
- Automatic self-levelling
- Unlevelled signal
- Laser head locking
- Smart button



Laser wavelength	520 nm
Levelling accuracy	±1,5mm/5m
Self-leveling range	±4°
Working range	30 m
Power supply	3,7 V Li-Ion 2000 Mah
Weight	0,29 kg



Tripod for line lasers



CAXL-S12*

* Compatible with:
CT44022 BMC
CT44023 BMC
CT44024 BMC
CT44048 MC



Max, height	120 cm
Height	76,5 cm
Thread Ø	5/8"
Weight	0,841 kg

Telescopic rod for line laser



CAXL-S40

* Compatible with:
CT44022 BMC
CT44023 BMC
CT44024 BMC
CT44048 MC



Max, height	4 m
Pipe diameter	34 mm
Weight	1,7 kg

CAXL-S31

* Compatible with:
CT44022 BMC
CT44023 BMC
CT44024 BMC
CT44048 MC



Max, height	3,1 m
Pipe diameter	34 mm
Weight	1,4 kg

Optical level



POWER TOOLS

CT44043 BMC

- Precise rotation
- Magnification x32
- Protection class IP54



5-60 m

Clear objective aperture	40 mm
Field of view	1°30'
Shortest focusing distance	0,5 m
Additive factor	0
Multiplication factor	100
Working range	±12"
Setting accuracy	±0,3"
Sensitivity of bubble	8'/2 mm
Circle graduation	1° or 1 gon
Weight	1,3 kg

CT44044 BMC

- Precise rotation
- Magnification x32
- Protection class IP54



5-60 m

Clear objective aperture	40 mm
Field of view	1°30'
Shortest focusing distance	0,5 m
Additive factor	0
Multiplication factor	100
Working range	±12"
Setting accuracy	±0,3"
Sensitivity of bubble	8'/2 mm
Circle graduation	1° or 1 gon
Weight	1,3 kg

Tripod for optical level



CAXO-S16

- * Compatible with:
CT44043 BMC
CT44044 BMC



Max. height	160 cm
Height	76,5 cm
Thread Ø	5/8"
Weight	2,24 kg

Ruler for optical level



CAXO-RA70

- * Compatible with:
CT44043 BMC
CT44044 BMC



Max. height	5 m
Height	120,5 cm
Width	4 cm
Weight	1,16 kg

High-pressure washer

CT42019

- Adjustable stream
- Temperature protection
- Pressure protection



 **1400 W**

CT42020

- Adjustable stream
- Temperature protection
- Pressure protection



 **1400 W**

B3

High-pressure washer

CT42021

- Adjustable stream
- Detergent tank
- Temperature protection
- Pressure protection



 **1800 W**

Amperage at voltage 220-230 V	7,63 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,7 MPa
Max, feed temperature	<60 °C
Min, feed flow rate	6,7 l/min
Rated pressure	10 MPa
Max, pressure	14 MPa
Flow rate	6,7 l/min
Max, flow rate	7,8 l/min
Weight	9,1 kg

CT42022

- Adjustable stream
- Detergent tank
- Hose reel
- Temperature protection
- Pressure protection



 **1800 W**

Amperage at voltage 220-230 V	7,63 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,7 MPa
Max, feed temperature	<60 °C
Min, feed flow rate	6,7 l/min
Rated pressure	10 MPa
Max, pressure	14 MPa
Flow rate	6,7 l/min
Max, flow rate	7,8 l/min
Weight	9,6 kg

B3

High-pressure washer

CT42023

- Adjustable stream
- Adjusting detergent quantity
- Detergent tank
- Temperature protection
- Pressure protection



 **2000 W**

Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,7 MPa
Max, feed temperature	<60 °C
Min, feed flow rate	6,78 l/min
Rated pressure	11 MPa
Max, pressure	15 MPa
Flow rate	6,7 l/min
Max, flow rate	7,8 l/min
Weight	12,3 kg

CT42024

- Adjustable stream
- Adjusting detergent quantity
- Detergent tank
- Hose reel
- Temperature protection
- Pressure protection



 **2000 W**

Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,7 MPa
Max, feed temperature	<60 °C
Min, feed flow rate	6,78 l/min
Rated pressure	11 MPa
Max, pressure	15 MPa
Flow rate	6,7 l/min
Max, flow rate	7,8 l/min
Weight	13 kg

B3

High-pressure Washer

CT42049 **B3**

Self-priming

Adjustable stream nozzle

Overpressure protection system

Amperage at voltage
220-230 V **5.2 A**
Voltage / frequency
220-230 V/50-60 Hz
Max. feed pressure
0,7 MPa
Max. feed temperature
<60 °C

Min. feed flow rate
5,54 l/min
Rated pressure
7 MPa
Max. pressure
10 MPa

Flow rate
5,5 l/min
Max. flow rate
6,5 l/min
Weight
10,6 kg

1200W

High-pressure washer

CT42056

- Self priming
- Temperature protection
- Pressure protection



1200 W

Amperage at voltage 220-230 V	4,71 A
Voltage / frequency	220-240 V / 50-60 Hz
Max. feed pressure	0,7 MPa
Max. feed temperature	<40 °C
Min. feed flow rate	5 l/min
Rated pressure	6,5 MPa
Max. pressure	10 MPa
Flow rate	5 l/min
Max. flow rate	6 l/min
Weight	9,3 kg

CT42050

- Self-priming
- Adjustable stream nozzle
- Overpressure protection system



1600 W

Amperage at voltage 220-230 V	6,95 A
Voltage / frequency	220-230 V / 50-60 Hz
Max. feed pressure	0,7 MPa
Max. feed temperature	<60 °C
Min. feed flow rate	5,54 l/min
Rated pressure	7 MPa
Max. pressure	13 MPa
Flow rate	6 l/min
Max. flow rate	7 l/min
Weight	10,6 kg

High-pressure washer



CT42065


- Induction motor
- Self-priming
- Adjustable stream nozzle
- Adjustable detergent quantity
- Equipped with detergent tank


2100 W


Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	1,2 MPa
Max, feed temperature	<50 °C
Min, feed flow rate	7 l/min
Rated pressure	11 MPa
Max, pressure	16 MPa
Flow rate	7 l/min
Max, flow rate	7,5 l/min
Weight	17,5 kg

CT42066

- Induction motor
- Self-priming
- Adjustable stream nozzle
- Adjustable detergent quantity
- Equipped with detergent tank
- Equipped with hose reel


2100 W


Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	1,2 MPa
Max, feed temperature	<50 °C
Min, feed flow rate	7 l/min
Rated pressure	11 MPa
Max, pressure	16 MPa
Flow rate	7 l/min
Max, flow rate	7,5 l/min
Weight	18,3 kg

High-pressure washer



CT42067

- Induction motor
- Self-priming
- Adjustable stream nozzle
- Adjustable detergent quantity
- Equipped with detergent tank

2500 W


Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	1,2 MPa
Max, feed temperature	<50 °C
Min, feed flow rate	7 l/min
Rated pressure	13 MPa
Max, pressure	19,5 MPa
Flow rate	7 l/min
Max, flow rate	7,8 l/min
Weight	19,5 kg

CT42068

- Induction motor
- Self-priming
- Adjustable stream nozzle
- Adjustable detergent quantity
- Equipped with detergent tank
- Equipped with hose reel


2500 W


Amperage at voltage 220-230 V	8,32 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	1,2 MPa
Max, feed temperature	<50 °C
Min, feed flow rate	7 l/min
Rated pressure	13 MPa
Max, pressure	19,5 MPa
Flow rate	7 l/min
Max, flow rate	7,8 l/min
Weight	20 kg

High-pressure washer



CT42070

- Induction motor
- self-imbibition
- Replaceable nozzle
- Kettle with detergent

2800 W


Amperage at voltage 220-230 V	11 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,6 MPa
Max, feed temperature	<40 °C
Rated pressure	11 MPa
Max, pressure	15 MPa
Flow rate	7,5 l/min
Max, flow rate	8,5 l/min
Weight	20 kg

CT42071

- Induction motor
- self-imbibition
- Replaceable nozzle
- Kettle with detergent
- Fitted with wheel bracket


2800 W


Amperage at voltage 220-230 V	11 A
Voltage / frequency	220-230 V / 50-60 Hz
Max, feed pressure	0,6 MPa
Max, feed temperature	<40 °C
Rated pressure	11 MPa
Max, pressure	15 MPa
Flow rate	7,5 l/min
Max, flow rate	8,5 l/min
Weight	35 kg

Battery charger

B3

POWER TOOLS

CT37001

- Suitable for charging 6V and 12V batteries
- Ammeter, intuitive display of charging current
- Rated charging current is 3A
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	40/65 W
Charging voltage	6/12 V
Charging current	3 A
Referecen capacity	10-50 Ah

CT37002

- Suitable for charging 6V and 12V batteries
- Ammeter, intuitive display of charging current
- Rated charging current is 3A
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	80/115 W
Charging voltage	6/12 V
Charging current	5 A
Referecen capacity	20-80 Ah

Battery charger

B3

CT37003

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current
- Rated charging current is 3A
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	90/128 W
Charging voltage	6/12 V
Charging current	6 A
Referecen capacity	25-90 Ah

CT37004

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current
- Rated charging current is 3A
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	110/180 W
Charging voltage	12/24 V
Charging current	5 A
Boost current	7 A
Referecen capacity	25-100 Ah

Battery charger

B3

CT37005

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current,
- Large charging current and Larger current start function,
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	310/530 W
Charging voltage	12/24 V
Charging current	16 A
Boost current	20 A

CT37006

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current,
- Large charging current and Larger current start function,
- Guaranteed Quality
- Fuse and Overheat protection
- Small size and light weight



Rated input voltage	220 V AC 50 Hz
Rated capacity	480/850 W
Charging voltage	12/24 V
Charging current	25 A
Boost current	30 A

Battery charger



CT37007

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current
- Large charging current and Larger current start function
- Guaranteed Quality
- Fuse and Overheat protection



Rated input voltage	220 V AC 50 Hz
Rated capacity	700 W
Charging voltage	12/24 V
Charging current	20 A
Boost current	30 A
Start current	180 A

CT37008

- Suitable for charging 12V and 24V batteries
- Ammeter, intuitive display of charging current
- Large charging current and Larger current start function
- Guaranteed Quality
- Fuse and Overheat protection



Rated input voltage	220 V AC 50 Hz
Rated capacity	1070 W
Charging voltage	12/24 V
Charging current	25/30 A
Boost current	50 A
Start current	300 A

Battery charger



CT37016

- Type of battery: Lead acid batteries (AGM, GEL, WET, STD etc)



Rated input voltage	220 V AC 50 Hz
Rated capacity	350 W
Charging voltage	6/12 V
Charging current	2/6/15 A
Engine start	75 A
Reference capacity	8-210 Ah

Smart Battery Charger



CT37018

- Jump start function
- Battery polarity reversal check
- Winter model
- Overheat and short circuit protection
- 6step charging



Rated Input Voltage	230 V
Charging Voltage	12/24 V
Start current	12V 200Amax / 24V 200Amax
Current Range Fast charge	30 Amax, 5 Amin,
Charging current	5A~30A
Reference capacity (Ah min/max)	20 Ah- 450 Ah

Battery charger

CT37017

Type of battery : Lead acid batteries
(AGM, GEL, WET, STD etc)

Input voltage

220 / 230 V

Fast/Normal charge

30-250 Ah/8-30Ah

Power output

390 W

Output voltage

6,12 V

Frequency

50 / 60 Hz

Amperage

2 / 6 / 17 A

Smart Battery Charger



CT37019

- Jump start function
- Battery polarity reversal check
- Winter model
- Overheat and short circuit protection
- 6 setp charging



Rated Input Voltage	230 V
Charging Voltage	12/24 V
Start current	12 V 250 Amax / 24 V 250 Amax
Current Range Fast charge	40 Amax, 5 Amin,
Charging current	5A ~40 A
Referecen capacity (AH min/max)	20 Ah- 600 Ah

CT37020

- Jump Start Function
- Battery Polarity Reversal Check
- Winter Model
- Overheat And Short Circuit Protection
- 6 setp Charging



Rated Input Voltage	230 V
Charging Voltage	12/24 V
Start current	12 V 300 Amax / 24 V 300 Amax
Current Range Fast charge	50 Amax, 5 Amin,
Charging current	5 A~50 A
Referecen capacity (AH min/max)	20 Ah- 750 Ah

POWER TOOLS

Smart Battery Charger



CT37021

- Jump Start Function
- Battery Polarity Reversal Check
- Winter Model
- Overheat And Short Circuit Protection
- 6 setp Charging

Rated Input Voltage	230 V
Charging Voltage	12/24 V
Start current	12 V 350Amax / 24 V 350Amax
Current Range Fast charge	60 Amax, 5 Amin,
Charging current	5 A~60 A
Referecen capacity (AH min/max)	20 Ah- 900 Ah

Battery charger



CT37022

- New inverter IGBT technology



Input voltage	1P / AC110 V / 240 V
Output voltage	DC12 V / DC24 V
Current range	10 A / 5 A
Max input power	150 W
Rated recharge capacity	40-150 Ah

CT37023

- New inverter IGBT technology



Input voltage(v)	1P / AC110 V / 240 V
Output voltage(v)	DC12 V / DC24 V
Current range(A)	15 A / 8 A
Max input power	250 W
Rated recharge capacity	40-150 Ah

Battery charger



CT37024

- New inverter IGBT technology



Input voltage	1P / AC110 V / 240 V
Output voltage	DC12 V / DC24 V
Current range	20 A / 10 A
Max input power	330 W
Rated recharge capacity	40-150 Ah

CT37025

- Traditional transformer technology
- Use advanced circuit design, high efficiency, long usage life
- With Changer and Boost modes, it can start the car in boost modes
- Suitable for motorcycle, car vessel, factory and various of storage battery recharging and starting



Supply voltage	AC220 V
Rated working capacity	Charging 1 KW / Start 3.6 KW
Max Starting Current	120 A
Charge voltage	12 V / 24 V
Rated Charging Current	20 A
Rated reference Capacity	20-400 Ah
Fuse	10 A

Battery charger



CT37026

- Traditional transformer technology
- Use advanced circuit design, high efficiency, long usage life
- With Changer and Boost modes, it can start the car in boost modes
- Suitable for motorcycle, car vessel, factory and various of storage battery recharging and starting



Supply voltage	AC220 V
Rated working capacity	Charging 1 KW / Start 6.4 KW
Max Starting Current	180 A
Charge voltage	12 V / 24 V
Rated Charging Current	30 A
Rated reference Capacity	30-500 Ah
Fuse	13 A

CT37027

- Traditional transformer technology
- Use advanced circuit design, high efficiency, long usage life
- With Changer and Boost modes, it can start the car in boost modes
- Suitable for motorcycle, car vessel, factory and various of storage battery recharging and starting



Supply voltage	AC220 V
Rated working capacity	Charging 1 KW / Start 8 KW
Max Starting Current	240 A
Charge voltage	12 V / 24 V
Rated Charging Current	40 A
Rated reference Capacity	40-700 Ah
Fuse	16 A

Battery charger



CT37028

- Traditional transformer technology
- Use advanced circuit design, high efficiency, long usage life
- With Changer and Boost modes, it can start the car in boost modes
- Suitable for motorcycle, car vessel, factory and various of storage battery recharging and starting



Supply voltage	AC220 V
Rated working capacity	Charging 1 KW / Start 10 KW
Max Starting Current	360 A
Charge voltage	12 V / 24 V
Rated Charging Current	50 A
Rated reference Capacity	50-800 Ah
Fuse	20 A

CT37029

- Traditional transformer technology
- Use advanced circuit design, high efficiency, long usage life
- With Changer and Boost modes, it can start the car in boost modes
- Suitable for motorcycle, car vessel, factory and various of storage battery recharging and starting



Supply voltage	AC220 V
Rated working capacity	Charging 1 KW / Start 12 KW
Max Starting Current	540 A
Charge voltage	12 V / 24 V
Rated Charging Current	60 A
Rated reference Capacity	60-1000 Ah
Fuse	20 A

WELDING MACHINES



Hand-held fast spot welder



CT33193

- Single Phase Design
- High load duration operation
- Small size and light weight
- Suitable for spot welding of carbon steel, alloy steel and other materials and sheets



Rated Input Voltage	1ph /220+/-10% V
No load Voltage	2,5 V
Input Capacity	8 KVA
Rated duty cycle	30%
Welding Thickness	1,5 +1,5 mm max

Hand-held fast spot welder (adjustable thickness)



CT33194

- Single Phase Design
- High load duration operation
- Small size and light weight
- Suitable for spot welding of carbon steel, alloy steel and other materials and sheets



Rated Input Voltage	1ph /220+/-10% V
No load Voltage	1,5 V - 2,5 V
Input Capacity	7 KVA
Rated duty cycle	50 %
Welding Thickness	1,5+1,5 mm, 1,2+1,2 mm, 1+1 mm, 0,8+0,8 mm, 0,6+0,6 mm, 1,5+1,5 mm, 1,2+1,2 mm

Industrial gas shielded welding



CT33202

- MIG TIG MMA
- 2T/4T
- Inductance
- VRD
- Hot-start
- Arc-force
- Display meters
- Inching



Input power	3P AC380 V±15% 50 Hz
Rated power capacity	14 KVA
Power factor	0,93
Efficiency	85%
Rated maximum output	350 A/34V
MMA current range	20-350 A
Lift-TIG current range	20-350 A
MIG voltage range	15-38 V
MIG current range	50-350 A
WFS range	1,5-18 m/min
OCV	65 V
Rated duty cycle	0,45
Power for CO2 heater	AC36 V(3,5A)V

Industrial gas shielded welding



CT33203

- MIG/MMA/Lift-TIG
- FCAW-Gas
- Synergic MIG
- Job save
- 2T/4T
- Inductance
- VRD
- Hot-start
- Arc-force
- Display meters
- Inching



Input power	3P AC 380V±15% 50 Hz
Rated power capacity	25 KVA
Power factor	0,93
Efficiency	85%
Rated maximum output	500 A/40 V
MMA current range	20-500 A
Lift-TIG current range	20-500 A
MIG voltage range	15-48 V
MIG current range	50-500 A
WFS range	1,5-21m/min
OCV	75 V
Rated duty cycle	MIG-35%, MMA-30%, TIG-40%
Power for CO2 heater	AC36 V(3,5A) V

ACDC manual argon arc welding machine



CT33024

- ACDC TIG 200A with MMA function
- AC TIG/DC TIG/AC TIG with pulse/DC TIG with pulse
- 2T/4T/spot welding mode
- MMA function with arc force
- Perfect machine for welding Aluminum and aluminum alloy some kind of very thin material,



Input voltage	1P 220 V
Current range	HF TIG 20-200 A, MMA 20-160 A
Electrode/Tungsten	1,6-2,4 mm
Tungsten	1,6-4,0 mm Electrode
NO LOAD voltage	65 V
Duty cycle(T=40 °C)	40°35%, 25°60%

Cutting machine



CT33025

- CUT-45 build-in aircompressor
- CUT with MMA function 2 in 1 achieve
- Cutting and welding in one machine, digital display show current
- Inside air compressor makes you more easier and convenient working outdoor
- Inside or outside aircompressor as you choose



Input voltage	1P 220 V
Current range	CUT20-45 A; MMA20-140 A
Cutting thickness	1 mm-15 mm
NO LOAD voltage	280 V
Duty cycle(T=40 °C)	40°50%, 25°100%

FLUX welding machine



CT33200

- MIG-120A,MIG
- FLUX/MMA/LIFTTIG
- 3 in 1 synergic



Input voltage	1P 220 V±10%
Current range	MIG 35-120;MMA 20-120; TIG 20-120
Electrode/wire	0,8/1,0 mm flux wire 1,6-3,2 mm; electrode
No load voltage	65 V
Duty cycle(T=40 C)	20%
Function	3 in 1 MIG Flux 0,8/1,0 mm wire /MMA/ LIFT TIG Intergrated MIG torch

MIG/MAG welding machine



CT33201

- MIG-200A with LCD,MIG
- GAS/GASLESS /MMA/LIFTTIG
- 4 in 1 synergic



Input voltage	1P 220 V±10%
Current range	MIG 35-200;MMA 20-180; TIG 20-180
Electrode/wire	0,6-1,0 mm solid;wire,0,6-1,0 mm; flux wire 1,6-5,0 mm electrode
No load voltage	65V
Duty cycle(T=40 C)	20%
Function	4 in 1

WELDING MACHINES

Handheld MMA welding machine



CT33188 BMC

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- 1-Phase

- MMA welding technology
- IGBT technology1-Phase
- Temperature protection
- Easy start
- Current control
- Hot start



20-110 A

Rated input voltage	185-250 V
Rated frequency	50/60 Hz
Rated input capacity	3,7 kVA
Rated output voltage	24,4 V
No-Load voltage	60 V
Welding electrode diameter	2-3,2 mm
Rated duty cycle	15%
Efficiency	85%
Weight	1,6 kg



Inverter DC MMA welding machine



CT33186

CT33186 IMC*

- MMA welding technology
- IGBT technology1-Phase
- Temperature protection
- Easy start
- Current control
- Hot start



30-130 A

Rated frequency	50 / 60 Hz
Rated input capacity	6,3 kVA
Current adjustment range	30-130 A
Rated output voltage	21,2-25,2 V
No-Load voltage	89 V
Welding electrode diameter	1,6-2,5 mm
Rated duty cycle	20%
Efficiency	80%
Weight	3 kg

CT33098

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Welding current meter



30-140 A

Rated input voltage	160-265 V
Rated frequency	50/60 Hz
Rated input capacity	6,6 kVA
Rated output voltage	21,2-25,6 V
No-Load voltage	80 V
Welding electrode diameter	2,5-3,2 mm
Rated duty cycle	40%
Efficiency	83%
Weight	4,9 kg

CT33102 IMC

- MMA welding technology
- IGBT technology
- Temperature protection
- Voltage reduction device VRD
- Current control
- Easy start
- Welding current meter


 30-150 A

Rated input voltage	180-265 V
Rated frequency	50/60 Hz
Rated input capacity	6,6 kVA
Rated output voltage	21,2-26 V
No-Load voltage	80 V

Welding electrode diameter	2,5-3,2 mm
Rated duty circle	35%
Efficiency	83%
Weight	3,6 kg

**CT33102**

- MMA welding technology
- IGBT technology
- Temperature protection
- Voltage reduction device VRD
- Current control
- Easy start
- Welding current meter


 30-150 A

Rated input voltage	180-265 V
Rated frequency	50/60 Hz
Rated input capacity	6,6 kVA
Rated output voltage	21,2-26 V
No-Load voltage	80 V
Welding electrode diameter	2,5-3,2 mm
Rated duty circle	35%
Efficiency	83%
Weight	3,6 kg

**CT33187
CT33187 IMC***

- MMA welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Voltage reduction device


 30-160 A

Rated frequency	50 / 60 Hz
Rated input capacity	7,6 kVA
Current adjustment range	30-160 A
Rated output voltage	21,2-26,4 V
No-Load voltage	79 V
Welding electrode diameter	2,5-4 mm
Rated duty cycle	20%
Efficiency	81%
Weight	3,6 kg

Inverter DC MMA welding machine



CT33099

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Welding current meter



30-160 A

Rated input voltage	160-265 V
Rated frequency	50/60 Hz
Rated input capacity	7,5 kVA
Rated output voltage	21,2-26,4 V
No-Load voltage	80 V
Welding electrode diameter	2,5-4 mm
Rated duty cycle	40%
Efficiency	83%
Weight	4,9 kg

CT33177 CT33177 IMC*

- MMA welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Voltage reduction device VRD
- Current control
- Easy start
- Welding current meter



30-200 A

Rated frequency	50 / 60 Hz
Rated input capacity	10,7 kVA
Current adjustment range	30-200 A
Rated output voltage	21,2-28 V
No-Load voltage	80 V
Welding electrode diameter	2,5-4 mm
Rated duty cycle	20%
Efficiency	80%
Weight	5 kg

WELDING MACHINES

Inverter DC MMA welding machine



CT33100

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Welding current meter



30-200 A

Rated input voltage	160-265 V
Rated frequency	50/60 Hz
Rated input capacity	9,9 kVA
Rated output voltage	21,2-28 V
No-Load voltage	80 V
Welding electrode diameter	2,5-4 mm
Rated duty cycle	40%
Efficiency	83%
Weight	5,9 kg

CT33101

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Welding current meter
- Arc force



20-270 A

Rated input voltage	130-560 V
Rated frequency	50/60 Hz
Rated input capacity	13,8 kVA
Rated output voltage	20,8-30,8 V
No-Load voltage 220 V / 380 V	83 V / 66 V
Welding electrode diameter	2,5-5 mm
Rated duty cycle	30%
Efficiency	83%
Weight	14,7 kg

Inverter DC MMA welding machine



CT33125 (MMA-250D)

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Easy start
- Welding current meter
- Arc force



20-160 A

Rated input voltage	220-380 V
Rated frequency	50/60 Hz
Rated input capacity	8,5 kVA
Rated output voltage	20,8-26,4 V
No-Load voltage 220 V / 380 V	101V / 86 V
Welding electrode diameter	1,6-4 mm
Rated duty cycle	35%
Efficiency	≥78 %
Weight	6 kg

CT33139 (MMA-300)

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Easy start
- Welding current meter
- Arc force



30-260 A

Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	13,3 kVA
Rated output voltage	21,2-30,4 V
No-Load voltage	65 V
Welding electrode diameter	1,6-5 mm
Rated duty cycle	25 %
Efficiency	≥78 %
Weight	9,7 kg



Inverter DC MMA welding machine



CT33124 (MMA-315D)

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Easy start
- Welding current meter
- Arc force


20-180 A

Rated input voltage	220-380 V
Rated frequency	50/60 Hz
Rated input capacity	12,2 kVA
Rated output voltage	20,8-27,2 V
No-Load voltage 220 V / 380 V	101 V / 86 V
Welding electrode diameter	1,6-4 mm
Rated duty cycle	30%
Efficiency	≥78 %
Weight	6 kg

CT33126 (MMA-400)

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Easy start
- Welding current meter
- Arc force


30-300 A

Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	15,4 kVA
Rated output voltage	21,2-32 V
No-Load voltage	75 V
Welding electrode diameter	1,6-5 mm
Rated duty cycle	25 %
Efficiency	≥78 %
Weight	13,5 kg

Inverter DC MMA welding machine



CT33127 (MMA-400D)

- MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Hot start function
- Easy start
- Welding current meter
- Arc force


35-260 A

Rated input voltage	220-380 V
Rated frequency	50/60 Hz
Rated input capacity	16,9 kVA
Rated output voltage	21,4-30,4 V
No-Load voltage 220 V / 380 V	83 V / 66 V
Welding electrode diameter	1,6-5 mm
Rated duty cycle	30%
Efficiency	≥78 %
Weight	13,5 kg

CT33145
CT33145 IMC*

- MMA welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Current control
- Anti-stick function
- Hot start function
- Easy start


20-120 A

Rated input voltage	230V±15%
Rated frequency	50 Hz
Rated input capacity	5 kVA
Current adjustment range	20-120 A
Rated output voltage	20,8-24,8 V
No-Load voltage	62 V
Welding electrode diameter	1-3,2 mm
Rated duty cycle	25 %
Efficiency	85%
Weight	2,88 kg

Inverter DC MMA welding machine



CT33147 CT33147 IMC*

- MMA welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Current control
- Anti-stick function
- Hot start function
- Easy start



20-200 A

Rated input voltage	230V±15%
Rated frequency	50 Hz
Rated input capacity	9,4 kVA
Current adjustment range	20-200 A
Rated output voltage	20,8-28 V
No-Load voltage	62 V
Welding electrode diameter	1-5 mm
Rated duty cycle	20%
Efficiency	85%
Weight	4,08 kg

CT33146 CT33146 IMC*

- MMA welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Current control
- Anti-stick function
- Hot start function
- Easy start



20-160 A

Rated input voltage	230V±15%
Rated frequency	50 Hz
Rated input capacity	7,1 kVA
Current adjustment range	20-160 A
Rated output voltage	20,8-26,4 V
No-Load voltage	65 V
Welding electrode diameter	1-4 mm
Rated duty cycle	20%
Efficiency	85%
Weight	3,48 kg

WELDING MACHINES

Inverter DC TIG/MMA welding machine



CT33185

- TIG welding technology
- IGBT technology
- 1-Phase
- Temperature protection
- Current control
- High frequency arc starting
- Welding current meter
- Air cooling

10-140 | 20-140 A

Rated input voltage:	220 V
Rated frequency	50/60 Hz
Rated input capacity (TIG / MMA)	4,5 / 6,8 kVA
Rated output voltage (TIG / MMA)	15,6-25,6 V
No-load voltage	86 V
Tungsten needle diameter	0,5-2,4 mm
Thickness of base metal	0,5 mm
Welding electrode diameter	1,6-3,2 mm
Rated duty cycle	35%
Efficiency	≥77%
Weight	6,2 kg



Inverter DC TIG/MMA welding machine



CT33123 (TIG-250I)

- TIG welding technology
- IGBT technology
- Temperature protection
- Current control
- Easy start
- Welding current meter
- Air cooling

15-200 A

Rated input voltage:	220 V
Rated frequency	50/60 Hz
Rated input capacity	7 kVA
Rated output voltage	10,6-18 V
No-load voltage:	95 V
Tungsten needle diameter:	0,5-3,2 mm
Thickness of base metal	0,5 mm
Welding electrode diameter	1,6-4 mm
Rated duty cycle	35%
Efficiency	≥81%
Weight	7,2 kg



CT33129 (TIG-250L)

- TIG/MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Easy start
- Welding current meter
- Arc force
- Air cooling

15-200 A

Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	7 kVA
Rated output voltage	10,6-18 V
No-load voltage	95 V
Tungsten needle diameter	0,5-3,2 mm
Thickness of base metal	0,5 mm
Welding electrode diameter	1,6-4 mm
Rated duty cycle	35%
Efficiency	≥81%
Weight	7,5 kg



Inverter DC TIG/MMA welding machine



Inverter Plasma cutting machine



CT33130 (TIG-250M)

- TIG/MMA welding technology
- IGBT technology
- Temperature protection
- Current control
- Easy start
- Welding current meter
- Arc force
- Air cooling



10-200 A

Rated input voltage:	220 V
Rated frequency:	50/60 Hz
Rated input capacity:	7 kVA
Rated output voltage:	10,4-18 V
No-load voltage:	95 V
Tungsten needle diameter:	0,5-3,2 mm
Thickness of base metal:	0,5 mm
Welding electrode diameter:	1,6-4 mm
Rated duty cycle	35%
Efficiency:	≥81%
Weight:	7,2 kg

CT33131 (CUT-40I)

- CUT welding technology
- IGBT technology
- Temperature protection
- Current control
- Welding current meter
- Arc force
- Welding torch operating mode 2T / 4T
- Air cooling



20-40 A

Rated input voltage:	220 V
Rated frequency:	50/60 Hz
Rated input capacity:	7,1 kVA
Rated output voltage:	88-96 V
No-load voltage:	275 V
Air pressure:	5 bar
Min-max cutting thickness:	0,5-16 mm
Rated duty cycle:	35%
Efficiency:	≥86%
Weight:	7,8 kg

Inverter Plasma cutting machine



CT33132 (CUT-60I)

- CUT welding technology
- IGBT technology
- Temperature protection
- Current control
- Welding current meter
- Arc force
- Welding torch operating mode 2T / 4T
- Air cooling



20-60 A

Rated input voltage	220 / 380 V
Rated frequency	50/60 Hz
Rated input capacity	11 kVA
Rated output voltage	88-104 V
No-Load voltage 220 V / 380 V	325 V / 297 V
Air pressure	5,5 bar
Min-max cutting thickness	0,5-25 mm
Rated duty cycle	35%
Efficiency	≥86%
Weight	13,4 kg

CT33159

- CUT technology
- IGBT technology
- Three phase input power
- Temperature protection
- Welding current control
- Welding current meter
- High-frequency arc starting
- 2T / 4T welding torch modes
- Air cooling



20-80 A

Rated input voltage	380 V
Rated frequency	50/60 Hz
Rated input capacity	12 kVA
Rated output voltage	92-123 V
No-Load voltage	305 V
Air pressure	8 bar
Rated duty cycle	60%
Efficiency	≥82%
Weight	51,8 kg

Inverter MIG welding machine



CT33168-1

- MIG / MMA welding technology
- IGBT technology
- Single phase input power
- Internal wire feeder
- Flux core wire / Easy start
- Temperature protection
- Welding current control / Voltage control
- Welding current meter / Voltage meter
- Inductance control
- Air cooling



30-140 A

Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	5,8 kVA
Rated output voltage	15,5-21 V
No-load voltage	55 V
Diameter of wire reel	100 mm
Diameter of welding wire	0,6-0,8 mm
Welding electrode diameter	2,5-3,2 mm
Rated duty cycle	76%
Efficiency	≥78%
Weight	7,4 kg

CT33168-5

- MIG / MMA welding technology
- IGBT technology
- Single phase input power
- Internal wire feeder
- Flux core wire / Easy start
- Temperature protection
- Welding current control / Voltage control
- Welding current meter / Voltage meter
- Inductance control
- Air cooling



30-140 A

Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	5,8 kVA
Rated output voltage	15,5-21 V
No-load voltage	55 V
Diameter of wire reel	200 mm
Diameter of welding wire	0,6-0,8 mm
Welding electrode diameter	2,5-3,2 mm
Rated duty cycle	76%
Efficiency	≥78%
Weight	12 kg

Inverter MIG welding machine



CT33128 (MIG-250L)

- MIG/MMA welding technology
- IGBT technology
- Internal wire feeder
- Flux core wire
- Temperature protection
- Current control
- Voltage regulation
- Easy start

40-200 A



Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	8,3 kVA
Rated output voltage	16-24 V
No-load voltage	62 V
Diameter of wire reel	200 mm"
Diameter of welding wire	0,6-1 mm
Min, thickness of workpiece	0,6 mm
Welding electrode diameter	1,6-4 mm
Rated duty cycle	35%
Efficiency	≥76%
Weight	13 kg

CT33103 (MIG-250)

- MIG/MMA welding technology
- IGBT technology
- Internal wire feeder
- Flux core wire
- Temperature protection
- Current control
- Voltage regulation
- Easy start

40-220 A



Rated input voltage	220 V
Rated frequency	50/60 Hz
Rated input capacity	13,02 kVA
Rated output voltage	16-25 V
No-load voltage	62 V
Diameter of wire reel	300 mm
Diameter of welding wire	0,6-1,2 mm
Min, thickness of workpiece	0,5 mm
Welding electrode diameter	1,6-4 mm
Rated duty cycle	35%
Efficiency	≥72%
Weight	18,7 kg

WELDING MACHINES

Fiber laser handheld welding machine



CT33206

- Simple operation, everyone can operate
- 3-10 times working speed faster than traditional welding
- low pollution, low radiation, instead of traditional TIG welding



Laser power	1500 W
Laser Line	1075 NM
Fiber Standard	10 M, 15 M optional
Input voltage	AC 220 V
Welding speed	0-120 mm/s
Recommended welding thickness	0,5-4,5 mm
Required weld seam	≤0,5 mm

CT33207

- Simple operation, everyone can operate
- 3-10 times working speed faster than traditional welding
- low pollution, low radiation, instead of traditional TIG welding



Laser power	2000 W
Laser Line	1075 NM
Fiber Standard	10 M, 15 M optional
Input voltage	AC 220 V
Welding speed	0-120 mm/s
Recommended welding thickness	0,5-4,5 mm
Required weld seam	≤0,5 mm

Mini inverter dc welding machine



CT33208 MMA-250K

- Mature and stable IGBT single tube technology
- Small size and light weight
- Fast dynamic response, 100% arcing, beautiful weld seam
- 2,5 Welding rods for continuous operation, with overheating and overcurrent protection functions



Input voltage	220 V±15% 50-60 Hz
Input power	3,4 KVA
Output Current	20-120 A
No load voltage	60 V
Load rate	60%
Insulate	F
Wedling rod	2,0-3,2 mm
Inner box	280*175*206 mm
Outer Carton	560*295*440 mm(6pcs)



Welding mask

B3

CAXW-MA2

- Sensitivity adjustment: stepless control
- Dark state shift: stepless shift



CAXW-MA1

- Sensitivity adjustment: stepless control
- Dark state shift: stepless shift



Li-Ion battery & solar supply

Filter size	110 x 90 x 90 mm
Active viewing area	92,5 x 42,5 mm
Light shade	DIN4
Dark shade	DIN9-DIN13
Switching time	≤3 / 10000 s
Delay time	0,1-0,8 s
Rated capacity of lithium battery	600 mAh
Operating temperature	-20 - +65 °C
Sensors to weld arc	2



Li-Ion battery & solar supply

Filter size	110 x 90 x 90 mm
Active viewing area	92,5 x 42,5 mm
Light shade	DIN4
Dark shade	DIN9-DIN13
Switching time	≤3 / 10000 s
Delay time	0,1-0,8 s
Rated capacity of lithium battery	600 mAh
Operating temperature	-20 - +65 °C
Sensors to weld arc	2

WELDING MACHINES

Welding helmet

B3

CAXW-MA1-800F

- fast recovery time
- economical model



CAXW-MA1-200H

- can open the screen window as a face shield when use tools



Filter size	110 x 90 x 9 mm
Active viewing area	90x35 mm
Light shade	DIN3
Dark shade	DIN11
Switching time	1/150000 s
Delay time	0,2-1 s
Sensor Quantity	2
Power Switch	AUTO
Lower Power Warn	NO


Optical Class	1/1/1/3
Cartridge Size	110x90x9mm
Viewing Area	90x34m (3,54"x1,34")
Light State	DIN3
Dark State	DIN11
Switching Time	3/10000 S±20%
Delay Time	0,2 S
Rated Capacity Of Li-Battery	210 mAh
Power Supply	Li-battery&Solar

CAXW-MA2-C90G

- large screen
- fast recovery time
- large battery capacity
- replaceable battery



Optical Class	1/1/1/2
Cartridge Size	133x114x10 mm
Viewing Area	100x93 mm
Light State	DIN3,5
Dark State	DIN5-9 / 9-13
Switching Time	1/10000 S±20%
Delay Time	0,1S/0,4 S/0,8 S
Rated Capacity Of Li-Battery	600 mAh
Replaceable Battery	Yes
UV/IR Protection	DIN13
Arc Sensor	4

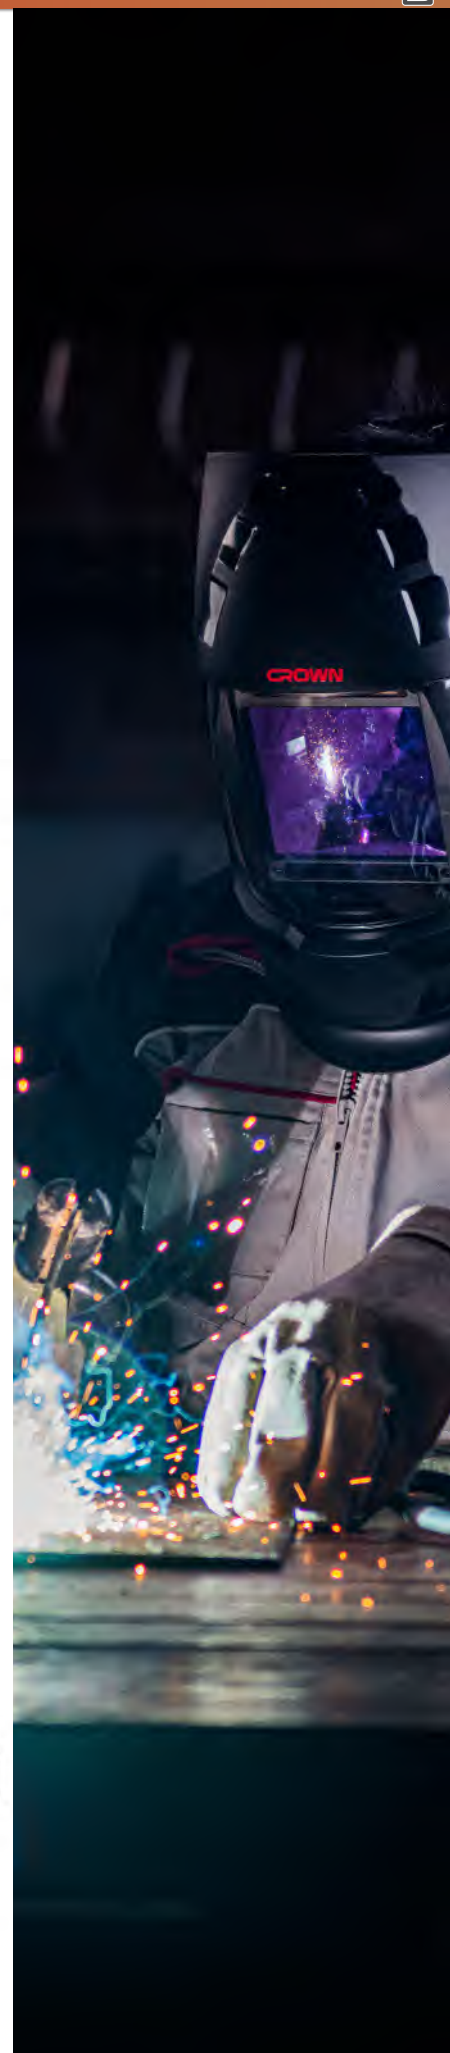

GARDEN TOOLS



Electric chain saw



CT15164

- Oregon saw chain
- Auto lubrication
- Soft grip



1800 W

Input voltage	230 V / 50 Hz
Idling speed	7200 min ⁻¹
Saw chain speed	13,5 / 21 m/s
Chain bar length	400 mm, 16"
Oil tank capacity	150 ml
Net weight (excluded cutting equipment)	5,54 kg

CT15165

- Oregon saw chain
- Auto lubrication
- Soft grip



2000 W

Input voltage	230 V / 50 Hz
Idling speed	7200 min ⁻¹
Saw chain speed	13,5 / 21 m/s
Chain bar length	400 mm, 16"
Oil tank capacity	150 ml
Net weight (excluded cutting equipment)	5,54 kg

GARDEN TOOLS

Gasoline chain saw



CT20095-18

- Oregon saw chain
- Auto lubrication
- Easy start
- Anti-vibrations handle
- Brake system
- 2 strokes



45 cm³

Power output	1800 W
Idling speed	3400 min ⁻¹
Fuel tank capacity	550 ml
Oil tank capacity	260 ml
Chain bar length	450 mm, 18"
Chain pitch / chain gauge	0,325" / 0,058"
Net weight (excluded cutting equipment)	5,3 kg

CT20096-20

- Oregon saw chain
- Auto lubrication
- Easy start
- Anti-vibrations handle
- Brake system
- 2 strokes



52 cm³

Power output	2000 W
Idling speed	3400 min ⁻¹
Fuel tank capacity	550 ml
Oil tank capacity	260 ml
Chain bar length	500 mm, 20"
Chain pitch / chain gauge	0,325" / 0,050"
Net weight (excluded cutting equipment)	5,4 kg

CT20097-20

- Oregon saw chain
- Auto lubrication
- Easy start
- Anti-vibrations handle
- Brake system
- 2 strokes



54,6 cm³

Power output	2400 W
Idling speed	3400 min ⁻¹
Fuel tank capacity	550 ml
Oil tank capacity	260 ml
Chain bar length	500 mm, 20"
Chain pitch / chain gauge	0,325" / 0,050"
Net weight (excluded cutting equipment)	5,5 kg

CT20102-20

- Oregon saw chain
- Easy start
- Anti-vibrations handle
- Brake system



54,6 cm³

Power output	2300 W
Idling speed	3000±250 min ⁻¹
Saw chain speed (by engine power 100%/133%)	18,3 / 24,3 m/s
Fuel tank capacity	550 ml
Oil tank capacity	260 ml
Chain bar length	500 mm, 20"
Chain pitch / chain gauge	9,3 / 1,47 mm
Net weight (excluded cutting equipment)	5,58 kg

GASOLINE CHAIN SAW

CT20101-18

- Oregon saw chain
- Easy start
- Anti-vibrations handle
- Brake system

45 cm ³ Engine displacement	1800 W Power output	3000±200 min ⁻¹ Min. speed	15.8/21 m/s Max. chain speed (by engine speed 1800/1300)
550 ml Fuel tank capacity	260 ml Oil tank capacity	450mm, 18" Chain bar length	8.26/1.47mm Chain pitch / chain gauge
5.54kg Net weight			

CT20113

MULTI-FUNCTION GARDEN TOOL

32,6 cm ³ Engine displacement	900 W Power output	3000±300 min ⁻¹ Idle speed
255 mm Head cutting width	430 mm Shank cutting width	900 ml Fuel tank capacity
11,87 kg Weight		

- Easy start
- Loop handle
- Primer pump
- Multi combi head
- Soft grip

Accessories

GARDEN TOOLS

Electric pole hedge trimmer

CT20115

- Rear-motor design
- Swivel head
- Additional shaft
- Rotating rear handle
- Lock-off function
- Soft grip

1000 W
 12 V

No-load speed:	1200 min ⁻¹
Length of extension shaft:	660 mm
Weight:	5,7 kg

CROWN 135

Gasoline brush cutters & grass trimmer **B3**

CT20050

- Easy start
- Metal skid plate protects the fuel tank
- U type handle
- Primer pump
- With nylon spool and 3T blade

42,7 cm³ **1250 W** **3000±200 min⁻¹**
(Displacement) (Power output) (Idle/speed)

255 mm **430 mm** **1100 ml** **7,8 kg**
(Blade cutting width) (Nylon line cutting width) (Fuel tank capacity) (Weight)

Gasoline brush cutters and grass trimmer

B3

CT20051

- Easy start
- Metal skid plate protects the fuel tank
- U type handle
- Primer pump
- With nylon spool and 3T blade


51,7 cm³

Power output	1400 W
Idling speed	3000±200 min ⁻¹
Blade cutting width	255 mm
Nylon line cutting width	430 mm
Fuel tank capacity	1100 ml
Weight	8 kg

Gasoline hedge trimmer

B3

CT20114

- Easy start
- Primer pump
- Anti-vibrations handle
- Rotating rear handle
- Laser cutting blades


22,5 cm³

Power output	650 W
Idling speed	3000±200 min ⁻¹
Fuel tank capacity	550 ml
Blade length	640 mm
Blade spacing	35 mm
Weight	5,8 kg

Gasoline generator

B3

CT34117

- Voltmeter
- Ac 220v16A socket
- Dc 12v socket
- Overload protection
- Manual start
- Optional wheel handle
- Electric start is optional



Amperage at voltage 230V	8,5 A
Rated output	2000 W
Max,output	2200 W
Rated voltage	230 V
Frequency	50 Hz
Model	5,5 HP
Fuel Capacity(L)	15 L
Starting System	Manual start
Weight	40 kg

CT34118

- Voltmeter
- Ac 220v16A socket
- Dc 12v socket
- Overload protection
- Manual start
- Optional wheel handle
- Electric start is optional



Amperage at voltage 230V	10,5 A
Rated output	2500 W
Max,output	2800 W
Rated voltage	230 V
Frequency	50 Hz
Model	6,5 HP
Fuel Capacity(L)	15 L
Starting System	Manual start
Weight	43 kg

Gasoline generator



CT34119

- Voltmeter
- Ac 220v16A socket
- Dc 12v socket
- Overload protection
- Manual start
- Optional wheel handle
- Electric start is optional



Amperage at voltage 230V	12 A
Rated output	2800 W
Max,output	3000 W
Rated voltage	230 V
Frequency	50 Hz
Model	7 HP
Fuel Capacity	15 L
Starting System	Manual start
Weight	45 kg

Gasoline generator



CT34121

- Voltmeter
- Ac 220v 16A socket
- Ac 220v 32A socket
- Dc 12v socket
- Overload protection
- Manual start + electric start



Amperage at voltage 230V	26 A
Rated output	6000 W
Max,output	6500 W
Rated voltage	230 V
Frequency	50 Hz
Model	15 HP
Fuel Capacity	25 L
Starting System	Manual start + electric start
Weight	85 kg

GARDEN TOOLS

GASOLINE GENERATOR

CT34120 WE

With Voltmeter

Manual Start

Electric Start

Optional Wheel Handle

-Ac 220v16A socket
-Ac 220v32A socket
-Dc 12v socket

CT34120 WE

MAX
RATED
5000W

MAX
OUTPUT
5500W

Amperage at voltage 220-230 V	21.5 A
Rated voltage	230 V
Frequency	50 Hz
Model	13 HP
Fuel Capacity(L)	25 L
Starting System	Manual Start + Electric Start
Weight	82 kg

Gasoline generator



CT34122

- Voltmeter
- Ac 220v 16A socket
- Ac 220v 32A socket
- Dc 12v socket
- Overload protection
- Manual start + electric start



Amperage at voltage 230V	30 A
Rated output	7000 W
Max,output	7500 W
Rated voltage	230 V
Frequency	50 Hz
Model	16 HP
Fuel Capacity	25 L
Starting System	Manual start + electric start
Weight	87 kg

CT34123

- Voltmeter
- Ac 220v 16A socket
- Ac 220v 32A socket
- Dc 12v socket
- Overload protection
- Manual start + electric start



Amperage at voltage 230V	34,5 A
Rated output	8000 W
Max,output	8500 W
Rated voltage	230 V
Frequency	50 Hz
Model	18 HP
Fuel Capacity	25 L
Starting System	Manual start + electric start
Weight	100 kg

Gasoline pump



CT35001

- Manual start



5.5 HP

Inlet / outlet inside diameter	50 mm / 2"
Suction head lift	8 m
Pump lift	26 m
Discharge capacity	550 l/min
Reservoir capacity	3,6 L
Weight	22 kg

CT35002

- Manual start



6,5 HP

Inlet / outlet inside diameter	80 mm / 3"
Suction head lift	8 m
Pump lift	28 m
Discharge capacity	1000 l/min
Reservoir capacity	3,6 L
Weight	26 kg

GARDEN TOOLS

Gasoline pump



CT35088

- Manual start
- Light



Pump Inlet&Outlet Inside Dia,	50mm(2inch)
Pump Lift	23m
Suction Height	7m
Max.Capacity	30m³/hr
Engine	LT168F-1
Weight	24 kg

Gasoline pump



CT35089

- Manual start
- Light



Pump Inlet&Outlet Inside Dia,	80mm(3inch)
Pump Lift	28m
Suction Height	7m
Max.Capacity	60m³/hr
Engine	LT168F-1
Weight	26 kg

GASOLINE POWER

CT34135

CT34136

OHV: SINGLE CYLINDER	Air-cooled 4-stroke	OHV: SINGLE CYLINDER
68x54 mm	Bore x Stroke(mm)	68x54 mm
196 cc	Displacement(cc)	388 cc
6.5HP(4.8KW)	Max. Output	13HP (9.6 KW)
5.8HP(4.3KW)	Rated Output	11.7HP (8.6 KW)
Recoil	Starting System	Recoil
3.6 L	Fuel Capacity	5.5 L
0.6 L	Engine Oil Capacity	1.1 L
16 kg	Weight	31 kg

LOW NOISE

FUEL EFFICIENT

POWERFUL

MANUAL START

LIGHT WEIGHT

Submersible pump



CT35046F

- Engine protection
- Floating switch



1200 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Flow rate	6,5 m³/h
Max head	44 m
Max depth	7 m
Outlet	G1"
Solid	0,5 mm
IP grade	IPX8
Impeller	4 pcs
Switch	Float switch
Weight	9,3 kg

CT35083

- Copper wire motor
- Temperature protection
- Continuous duty
- 9M length cable
- With float switch



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Flow rate	13 m³/h
Max head	9,5 m
Max depth	7 m
Outlet	G1", G1-1/4"
Solid	30 mm
IP grade	IPX8
Impeller	1 pcs
Switch	Float switch
Weight	4,1 kg

Flow rate	6,5 m³/h	Outlet	G1-1/2"	Impeller	4 pcs
Max head	44 m	Solid	0,5 mm	Switch	+
Max depth	7 m	IP grade	IPX8	Weight	9,3 kg

GARDEN TOOLS

Submersible pump



CT35084

- Engine protection grade: IP68
- Floating switch
- Continuous duty
- Aluminum impeller
- Copper wire motor
- Temperature protection



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,37 / 0,5 kW/HP
Max. flow	6 m³/h
Protection	IP68
Max. head	17 m
Outlet	1"
Weight	7,2 kg

CT35085

- Engine protection grade: IP68
- Floating switch
- Continuous duty
- Aluminum impeller
- Copper wire motor
- Temperature protection



550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,55 / 0,75 kW/HP
Max. flow	7,2 m³/h
Protection	IP68
Max. head	20,5 m
Outlet	1"
Weight	9,8 kg

Submersible pump



CT35086

- Engine protection grade: IP68
- Floating switch
- Continuous duty
- Aluminum impeller
- Copper wire motor
- Temperature protection



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,75 / 1 kW/HP
Max, flow	8,4 m³/h
Protection	IP68
Max, head	32 m
Outlet	1"
Weight	12,2 kg

CT35090

- Copper Wire Motor
- Cast iron impeller
- Temperature Protection
- Continuous Duty



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,37 / 0,5 kW/HP
Max, flow	10,8 m³/h
Protection	IP68
Max, head	8 m
Outlet	1-1/4"
Weight	8,5 kg

CT35091

- Copper Wire Motor
- Cast iron impeller
- Temperature Protection
- Continuous Duty



550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,55 / 0,751 kW/HP
Max, flow	14,1 m³/h
Protection	IP68
Max, head	8,5 m
Outlet	2"
Weight	13,8 kg

CT35092

- Copper Wire Motor
- Cast iron impeller
- Temperature Protection
- Continuous Duty



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Phase	Single
Rated output	0,75 / 1 kW/HP
Max, flow	15,6 m³/h
Protection	IP68
Max, head	11 m
Outlet	2"
Weight	14,4 kg

GARDEN TOOLS

Self-priming vortex pump



CT35045

- Full copper impeller
- Overload protection
- Auto-control pump
- Automatic regulation



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	35 l/min
Max, head	42 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	9,6 kg

CT35082

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage	220-240
Rated frequency	50
No load speed	2850
Max, flow rate	35 l/min
Max, head	35 m
Max, suction	9 m
Inlet / outlet size	1"x1"
Weight	6,4 kg

Vortex pump



CT35034

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	35 l/min
Max, head	35 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	5,3 kg

CT35035

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	50 l/min
Max, head	60 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	10 kg

Vortex pump



CT35055

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage(V)	220-240
Rated frequency(Hz)	50
No load speed(rpm)	2850
Max, flow rate	35 l/min
Max, head	35 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	5,5 kg

CT35056

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



550 W

Rated voltage(V)	220-240
Rated frequency(Hz)	50
No load speed(rpm)	2850
Phase	Single
Rated output(kW/HP)	0,55 / 0,75
Max, flow(L/min)	50
Max, head(m)	50
Weight	7,6kg

GARDEN TOOLS

Vortex pump



CT35057

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



750 W

Rated voltage(V)	220-240
Rated frequency(Hz)	50
No load speed(rpm)	2850
Phase	Single
Rated output(kW/HP)	0,75/1
Max, flow(L/min)	50
Max, head(m)	65
Weight	10kg

CT35087

- Aluminum motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage(V)	220-240
Rated frequency(Hz)	50
No load speed(rpm)	2850
Phase	Single
Rated output(kW/HP)	0,37/0,5
Max, flow(L/min)	30
Max, head(m)	32
Weight	4,3kg

Vortex pump

CT35093

- Aluminum motor
- Brass impeller
- Temperature protection
- Continuous duty




370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	30 l/min
Max, head	32 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	4,7 kg

Centrifugal pump

CT35042

- Full copper impeller
- Stainless steel shaft

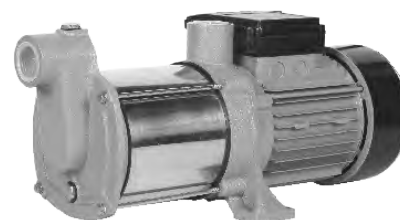

600 W


Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	90 l/min
Max, head	35 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	8,5 kg

GARDEN TOOLS

Centrifugal pump

CT35043

- Full copper impeller
- Stainless steel shaft

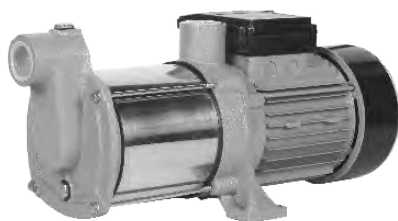


750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	90 l/min
Max, head	45 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	9,5 kg

Centrifugal pump

CT35044

- Full copper impeller
- Stainless steel shaft

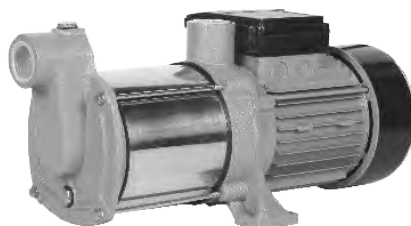

900 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	90 l/min
Max, head	55 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	10,5 kg

CROWN

TOOLS FOR A BETTER LIFE

Centrifugal Pump

CT35061 370W CT35062 750W CT35064 1500W



- Copper impeller and Aluminum motor, low temperature rise, safe and durable
- Pure copper impeller, durable, corrosion resistant
- With temperature protection, automatic stop when temperature rise is too high due to water shortage
- Multiple surface spray paint, smooth and beautiful, easy to maintain
- Submersible, max. depth 2000m



CT35061
370W 1/2HP

Q.SHP	Q.SHP
Max. flow rate	30 l/min
Max. head	32 m
Max. suction	8 m
Inlet / outlet size	1"x1"
Weight	4,7 kg

CT35062
750W 1HP

1HP	1HP
Max. flow rate	90 l/min
Max. head	45 m
Max. suction	8 m
Inlet / outlet size	1"x1"
Weight	9,5 kg

CT35064
1500W 2HP

2HP	2HP
Max. flow rate	90 l/min
Max. head	55 m
Max. suction	8 m
Inlet / outlet size	1"x1"
Weight	10,5 kg

Centrifugal pump



CT35061

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	80 l/min
Max, head	20 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	7,7 kg

CT35063

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



1100 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	120 l/min
Max, head	38 m
Max, suction	8 m
Inlet / outlet size	1-1/4"x1"
Weight	17 kg

Centrifugal pump



CT35064

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



1500 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	130 l/min
Max, head	40 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	21 kg

CT35080

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	90 l/min
Max, head	28 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	11,5 kg


GARDEN TOOLS

Centrifugal pump



CT35081

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty

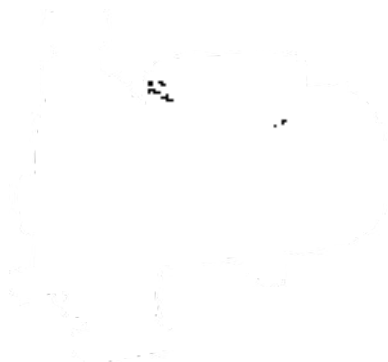

1500 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	130 l/min
Max, head	40 m
Max, suction	8 m
Inlet / outlet size	1-1/2"x1"
Weight	19 kg

CT35094

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	80 l/min
Max, head	22 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	11,5 kg

Jet pump



CT35065

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	42 l/min
Max, head	35 m
Max, suction	9 m
Inlet / outlet size	1"x1"
Weight	12,3 kg

CT35066

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	50 l/min
Max, head	52 m
Max, suction	9 m
Inlet / outlet size	1"x1"
Weight	14,2 kg

GARDEN TOOLS

Jet pump



CT35067

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



1100 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	57 l/min
Max, head	90 m
Max, suction	9 m
Inlet / outlet size	1-1 / 4"x1"
Weight	25 kg

CT35068

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



1500 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	100 l/min
Max, head	62 m
Max, suction	9 m
Inlet / outlet size	1-1/2" / 1-1/4"
Weight	26 kg

Jet pump



CT35095

- Copper wire motor
- Brass impeller
- Temperature protection
- Continuous duty



750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	70 l/min
Max, head	35 m
Max, suction	8 m
Inlet / outlet size	1"x1"
Weight	13,5 kg



CT35069

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


250 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	4,2 m³/h
Max, head	32 m
Body size	3"
Pipe diameter	1-1/4"
Weight	8,5 kg

CT35070

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	4,2 m³/h
Max, head	44 m
Body size	3"
Pipe diameter	1-1/4"
Weight	9,7 kg

CT35071

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	4,2 m³/h
Max, head	68 m
Body size	3"
Pipe diameter	1-1/4"
Weight	11 kg

CT35072

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	4,2 m³/h
Max, head	88 m
Body size	3"
Pipe diameter	1-1/4"
Weight	12,4 kg

CT35073

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


1100 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	4,2 m³/h
Max, head	120 m
Body size	3"
Pipe diameter	1-1/4"
Weight	16,7 kg

CT35074

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


370 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	39 m
Body size	4"
Pipe diameter	1-1/4"
Weight	9 kg

GARDEN TOOLS

CT35075

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


550 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	52 m
Body size	4"
Pipe diameter	1-1/4"
Weight	13,2 kg

CT35076

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


750 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	65 m
Body size	4"
Pipe diameter	1-1/4"
Weight	14,5 kg

CT35077

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box


1100 W

Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	91 m
Body size	4"
Pipe diameter	1-1/4"
Weight	17,6 kg

Deep well pump

B3

CT35078

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box

 1500 W



Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	117 m
Body size	4"
Pipe diameter	1-1/4"
Weight	21,6 kg

CT35079

- Brass outlet
- Brass coupling
- Brass oil chamber
- Stainless steel surface
- Copper wire Motor
- Temperature protection
- 20m length cable
- Included control box

 2200 W



Rated voltage	220-240 V
Rated frequency	50 Hz
No load speed	2850 rpm
Max, flow rate	6 m³/h
Max, head	155 m
Body size	4"
Pipe diameter	1-1/4"
Weight	25,6 kg

GARDEN TOOLS

Pressure controller

B2

PS-01

- Water shortage protection
- Pressure regulation
- Indicator light display
- IP65 protection grade
- With cable and plug



 1100 W Max,

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Pipe diameter	1"x1"
Max, operating temperature	60 °C
Weight	1,3 kg

DSK-2,2

- Water shortage protection
- Pressure regulation
- Pressure indicator
- IP44 protection grade
- With cable and plug



 1100 W Max,

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Pipe diameter	1"x1"
Max, operating temperature	60 °C
Weight	1,3 kg

CEWP-111A

- Water shortage protection
- Auto restart
- Pressure regulation
- Pressure indicator
- IP44 protection grade



 1100 W Max,

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Inlet / outlet size	G1"
Max, operating temperature	55 °C
Weight	1,3 kg

CEWP-111B

- Water shortage protection
- Auto restart
- Pressure regulation
- 3 operating modes: pressure, time, flow
- Pressure indicator
- IP65 protection grade



 1100 W Max,

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Inlet / outlet size	G1"
Max, operating temperature	55 °C
Weight	1,3 kg

CEWP-111C

- Water shortage protection
- Pressure regulation
- Indicator light display
- IP65 protection grade
- With 0,2m cable



 1100 W Max.

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Pipe diameter	1"x1"
Max, operating temperature	55 °C
Weight	1 kg

CEWP-111D

- Water shortage protection
- Pressure regulation
- Pressure indicator
- IP65 protection grade
- With 0,2m cable



 1100 W Max.

Amperage at voltage 220-240 V	10 A
Starting working pressure	1,5 bar
Max, pressure	10 bar
Pipe diameter	1"x1"
Max, operating temperature	55 °C
Weight	1 kg

DIESEL WELDING GENERATOR

2.0 KVA

CT34083



Rated output

1.8 KVA

Rated Voltage

230 V

Welding current regulation range

50-180 A

Engine type

1 cylinder, 4 stroke, air-cooled

Engine Displacement

418 cm³

Fuel tank capacity

12.5 L

Weight

107,4 kg

- 2 functions generator / welding machine
- DC 12V output
- Current control
- Synchronous alternator
- Electric start / Easy start
- AC 230V socket
- MMA
- Manual start

Diesel generator



CT34084 CT34084S*

- Silent operation
- AC 400V socket
- AC 230V socket
- DC 12V output
- Synchronous alternator
- Engine protection
- Voltage meter
- ATS Auto transfer switch*
- Digital AVR



5,5 KVA

Rated output	4,6 / 5 KVA
Rated Voltage	230/400 V
DC12V output	yes
Engine type	1 cylinder, 4 stroke
Engine Displacement	456 cm ³
ATS	*
Fuel tank capacity	14,5 L
Weight	143,7 kg

CT34085 CT34085S*

- Silent operation
- AC 230V socket
- DC 12V output
- Synchronous alternator
- Engine protection
- Voltage meter
- ATS Auto transfer switch*
- Digital AVR



5,5 KVA

Rated output	5 KVA
Rated Voltage	230 V
DC12V output	yes
Engine type	1 cylinder, 4 stroke
Engine Displacement	456 cm ³
ATS	*
Fuel tank capacity	14,5 L
Weight	142 kg

GARDEN TOOLS

Gasoline generator



CT34062

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Manual start
- Circuit breaker

850 W

Amperage at voltage 230V	3,7 A
Power output	900 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	28 kg



Gasoline generator



CT34063W

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Manual start
- Circuit breaker
- Variable speed
- Engine protection



1500 W

Amperage at voltage 230V	6,5 A
Power output	1700 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	47 kg

CT34064W

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Manual start
- Circuit breaker
- Variable speed
- Engine protection



2000 W

Amperage at voltage 230V	8,7 A
Power output	2200 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	48 kg

Gasoline generator

B³

CT34065W

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Manual start
- Circuit breaker
- Variable speed
- Engine protection

2500 W

Amperage at voltage 230V	10,9 A
Power output	2800 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	48 kg



Gasoline generator

B³

CT34066WE

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Electric start
- Circuit breaker
- Variable speed
- Starter



3500 W

Amperage at voltage 230V	15,2 A
Power output	3700 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	91 kg

CT34067WE

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Electric start
- Circuit breaker
- Variable speed
- Starter



4000 W

Amperage at voltage 230V	17,4 A
Power output	4500 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	92 kg

GARDEN TOOLS

Gasoline generator

B³

CT34068WE

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Electric start
- Circuit breaker
- Variable speed
- Starter



5000 W

Amperage at voltage 230V	21,7 A
Power output	5500 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	95 kg

CT34069WE

- Analog voltmeter
- AC 230 V socket
- DC 12 V socket
- Start breaker
- Electric start
- Circuit breaker
- Variable speed
- Starter



5500 W

Amperage at voltage 230V	23,9 A
Power output	6000 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	96 kg

GASOLINE GENERATOR

CT34077 W RATED POWER 2800 W

13 A	3000 VA	230 V	3000 min⁻¹	50 Hz	48,75 kg
Amperage at voltage 230V	Power output	Rated voltage	No-load speed	Frequency	Weight

- Unique square tube frame •
- Low oil alarm •
- Overload protection •
- Manual start •
- With wheels and handle •



CT34077 CT34077WE

Gasoline generator


CT34078WE**
CT34078W*
CT34078

- Unique square tube frame
- Low oil alarm
- Overload protection
- Electric start**
- Manual start
- With wheels and handle**


 5000 W

Amperage at voltage 230V	23,9 A
Power output	5500 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	80,5 kg

Gasoline generator


CT34079WE*
CT34079W

- Unique square tube frame
- Low oil alarm
- Overload protection
- Electric start*
- Manual start


 6500 W

Amperage at voltage 230V	30 A
Power output	7000 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	78 kg

Gasoline generator


CT34080WE*
CT34080W

- Unique square tube frame
- Low oil alarm
- Overload protection
- Electric start*
- Manual start

 7000 W

Amperage at voltage 230V	32,6 A
Power output	7500 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	87,2 kg



CT34070

- 3 functions generator / air compressor / welding machine
- Synchronous alternator
- Analogic voltmeter
- AC 230V socket
- DC 12V output
- MMA
- Current control
- Electric start
- Manual start
- Easy start
- Level oil indicator

**Air compressor:**
 1,1 Kw

Power output	1100 W
Rated Voltage	230 V
Pressure ratio	8 bar
No-load speed	2880 min ⁻¹
Frequency	50 Hz

Generator:
 4 Kw

Amperage at voltage 230V	17,4 A
Power output	4000 W
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	140 kg

Welding machine:
 50-180 A

Rated input voltage	26 V
Frequency	50 Hz
No-load voltage	60-80 V
Welding electrode diameter	2,6-4 mm
Rated duty cycle	20%
Efficiency	80%

GARDEN TOOLS

Gasoline generator**CT34075WE******CT34075W*****CT34075**

- Unique square tube frame
- Low oil alarm
- Overload protection
- Electric start**
- Manual start
- With wheels and handle* **


 2000 W

Amperage at voltage 230V	9,56 A
Power output	2200 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	44,1 kg

CT34076WE****CT34076W*****CT34076**

- Unique square tube frame
- Low oil alarm
- Overload protection
- Electric start**
- Manual start
- With wheels and handle* **


 2500 W

Amperage at voltage 230V	12,1 A
Power output	2800 VA
Rated voltage	230 V
No-load speed	3000 min ⁻¹
Frequency	50 Hz
Weight	47,4 kg

AIR TOOLS



Air spray gun



CT38086

•Quick coupling



29 psi

Air flow rate	400 l/min
Reservoir capacity	600 ml
Thread of air connector	1/4"
Nozzle Ø	1/1,2/1,3/1,4/1,7/1,8/2 mm
Fluid flow rate	80/110/130/150/190/210/260 ml/min
Spray width	220/230/240/250/280/280/300 mm
Weight	0,7 kg

CT38145

•Quick coupling



0,3 Mpa

Air flow rate	250 l/min
Reservoir capacity	600 ml
Thread of air connector	1/4"
Nozzle Ø	1,4 / 2 mm
Fluid flow rate	170 / 260 ml/min
Spray width	180 - 260 / 240 - 320 mm
Weight	0,7 kg

Air spray gun



CT38087

•Quick coupling



36 psi

Air flow rate	400 l/min
Reservoir capacity	1000 ml
Thread of air connector	1/4"
Nozzle Ø	1/1,2/1,3/1,4/1,7/1,8/2 mm
Fluid flow rate	70/100/120/140/180/200/250 ml/min
Spray width	200/210/220/230/240/250/260 mm
Weight	1 kg



AIR TOOLS

Air spray gun



CT38100

•Quick coupling



21 psi

Air flow rate	200 l/min
Reservoir capacity	100 ml
Thread of air connector	1/4"
Nozzle Ø	0,5/0,8/1/1,2 mm
Fluid flow rate	20/30/50/70 ml/min
Spray width	130/150/160/170 mm
Weight	0,4 kg

CT38101

•Quick coupling



29 psi

Air flow rate	285 l/min
Reservoir capacity	600 ml
Thread of air connector	1/4"
Nozzle Ø	1,3/1,4/1,7/2 mm
Fluid flow rate	140/160/210/290 ml/min
Spray width	250/260/280/290 mm
Weight	0,65 kg

Air spray gun



CT38102

• Quick coupling



25/29/29 psi

Air flow rate	460/360/270 l/min
Reservoir capacity	600 ml
Thread of air connector	1/4"
Nozzle Ø	1,2/1,3/1,4 mm
Fluid flow rate	160-190/170-200/160-190 ml/min
Spray width	300-325/285-300/290-310 mm
Weight	0,7 kg



Air spray gun



CT38103

• Quick coupling



36 psi

Air flow rate	75/225/225/170 l/min
Reservoir capacity	350 ml
Thread of air connector	1/4"
Nozzle Ø	1/1,3/1,5/1,8 mm
Fluid flow rate	95/160/190/240 ml/min
Spray width	130/175/190/190 mm
Weight	0,45 kg

CT38104

• Quick coupling



36 psi

Air flow rate	75/225/225/170 l/min
Reservoir capacity	600 ml
Thread of air connector	1/4"
Nozzle Ø	1/1,3/1,5/1,8 mm
Fluid flow rate	85/150/170/210 ml/min
Spray width	120/160/175/170 mm
Weight	0,57 kg

AIR TOOLS

Air spray gun



CT38111

• Quick coupling



36-43 psi

Air flow rate	270/270/220/220 l/min
Thread of air connector	1/4"
Nozzle Ø	0,8/1/1,3/1,5 mm
Fluid flow rate	150/200/200/250 ml/min
Spray width	190/220/210/240 mm
Weight	0,33 kg

CT43008

• Portable design
• Fluid suction



20 MPa

Rated power	1010 W
Amperage at voltage 220-230 V	4,5 A
Fluid flow rate	1,5 L/min
Nozzle type	515
Spray width	250 - 300 mm
Hose length	7,5 m
Weight	5,5 kg

Vehicle compressor



CT36059

- Integrated LED light
- Manometer
- Temperature protection



60 W

Rated voltage	12 V
Max, current	<6,5 A
Productivity	13 L/min
Max, pressure	10,34 bar
Continuous operation time	<20 min
Ambient temperature	-6°C ... +49°C
Weight	0,5 kg

CT36060

- Integrated LED light
- Manometer
- Units selection
- Variable pressure
- Temperature protection



120 W

Rated voltage	12 V
Max, current	<12 A
Productivity	30 L/min
Max, pressure	6,89 bar
Continuous operation time	<20 min
Ambient temperature	20°C ... +50°C
Weight	1,75 kg

Vehicle compressor



CT36066

- Integrated LED light
- Manometer
- Battery clamps
- Lighter plug



100 / 276 W

Rated voltage	12 / 230 V
Max, current	<15 / 1-2 A
Productivity	30 L/min
Max, pressure	6,89 bar
Continuous operation time	<20 min
Ambient temperature	20°C ... +50°C
Weight	2,4 kg

CT36067

- Integrated LED light
- Manometer
- Battery clamps
- Lighter plug



200 W

Rated voltage	12 V
Max, current	<20 A
Productivity	40 L/min
Max, pressure	6,89 bar
Continuous operation time	<20 min
Ambient temperature	20°C ... +50°C
Weight	2,1 kg

AIR TOOLS

Vehicle compressor



CT36068

- Manometer



230 W

Rated voltage	230 V
Max, current	<0,4-1 A
Productivity	35 L/min
Max, pressure	6,89 bar
Continuous operation time	<10 min
Ambient temperature	20°C ... +50°C
Weight	2,3 kg

CT36093

- Integrated LED light
- Manometer



300 W

Rated voltage	12 V
Max, current	<20 A
Productivity	60 L/min
Max, pressure	10 bar
Continuous operation time	<20 min
Ambient temperature	20°C ... +50°C
Weight	2,7 kg

Vehicle compressor



CT36036

- Integrated LED light
- Manometer
- Temperature protection



250 W

Rated voltage	12 V
Max. current	<18 A
Productivity	45 L/min
Continuous operation time	<20 min
Max. pressure	7 bar
Ambient temperature	20°C ... +50°C
Weight	3,3 kg

Direct air compressor



CT36046

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



1 HP

Rated speed	2800 min ⁻¹
Tank capacity	9 L
Max. pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	80 L/min
Weight	13,8 kg

Direct air compressor



CT36028

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection

2 HP

HOT



No-load speed	2800 min ⁻¹
Tank capacity	25 L
Max. pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	135 L/min
Weight	22 kg

Direct air compressor



CT36072

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



3 HP

No-load speed	2900 min ⁻¹
Air receiver capacity	50 L
Operating pressure	8 bar
Voltage rating	230V~50/60Hz
Air displacement	360 L/min
Weight	33,8 kg

CT36029

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection

HOT



2 HP

No-load speed	2800 min ⁻¹
Tank capacity	50 L
Max. pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	135 L/min
Weight	28 kg



Belt driven air compressor

B3

CT36030

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



2 HP

No-load speed	980 min ⁻¹
Tank capacity	50 L
Max, pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	120 L/min
Weight	42,5 kg

CT36031

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



2 HP

No-load speed	980 min ⁻¹
Tank capacity	100 L
Max, pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	120 L/min
Weight	55 kg

AIR TOOLS

Belt driven air compressor

B3

CT36032

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



3 HP

No-load speed	980 min ⁻¹
Tank capacity	200 L
Max, pressure	8 bar
Voltage rating	230V/50Hz
Air displacement	250 L/min
Weight	88 kg

CT36033

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



5,5 HP

No-load speed	980 min ⁻¹
Tank capacity	200 L
Max, pressure	8 bar
Voltage rating	380V/50Hz
Air displacement	480 L/min
Weight	134 kg

Oil-free air compressor

B3

CT36073

- Manometer
- Variable pressure
- Pressure protection
- Temperature protection



1,5 HP

No-load speed	2800 min ⁻¹
Operating pressure	6-8 bar
Max. pressure	8 bar
Voltage rating	230/240V~50/60Hz
Air receiver capacity	6 L
Productivity	193 L/min
Weight	15,8 kg

CT36090

- Innovative built-in muffler design
- Increase the cylinder and quickly inflate for 54 seconds
- Intelligent digital display with dual safety protection
- High power motor with durable high-voltage output
- Preferred products for woodworking and home decoration



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	1400 w
Displacement	100 L/min
Weight	23 kg
Air displacement	54 s
Tank capacity	30 L

Oil-free air compressor

B3

CT36094

- Innovative built-in muffler design,
- Fast filling of the four cylinders takes only 46 seconds
- Intelligent digital display with dual safety protection
- High power motor, durable high voltage and stable output
- Preferred product for professional painting



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	2800 w
Displacement	200 L/min
Weight	36 kg
Air displacement	46 s
Tank capacity	50 L

CT36095

- Innovative built-in muffler design
- Upgrade motor, super power, fast air charging 44S
- Intelligent digital display with dual safety protection
- Multifunctional products for decoration and spray painting



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	1800 w
Displacement	150 L/min
Weight	30 kg
Air displacement	44 s
Tank capacity	50 L

AIR TOOLS

Oil-free air compressor

B3

CT36096

- Innovative built-in muffler design,
- Wide application;
- Intelligent individual motor control start and stop
- Intelligent digital display with dual safety protection

Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	3600 w
Displacement	300 L/min
Weight	50 kg
Air displacement	57 s
Tank capacity	70 L



Oil-free air compressor



CT36097

- Innovative built-in muffler design
- Increase the cylinder and quickly inflate for 54 seconds
- Intelligent digital display with dual safety protection
- High power motor with durable high-voltage output



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	1400 w
Displacement	100 L/min
Weight	28,5 kg
Air displacement	100 s
Tank capacity	50 L

CT36098

- Innovative built-in muffler design,
- Wide application;
- Intelligent individual motor control start and stop
- Intelligent digital display with dual safety protection
- High power motor, durable high voltage and stable output;
- Auto maintenance, industrial assembly line supporting



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	4200 w
Displacement	300 L/min
Weight	69 kg
Air displacement	93 s
Tank capacity	120 L

AIR TOOLS

Oil-free air compressor



CT36099

- Innovative built-in muffler design,
- Wide application;
- Intelligent individual motor control start and stop
- Intelligent digital display with dual safety protection
- High power motor, durable high voltage and stable output;
- Auto maintenance, industrial assembly line supporting



Voltage	220-230V/50Hz
Rotational speed	2800 r/min
Power	5600 w
Displacement	400 L/min

Weight	86 kg
Air displacement	93 s
Tank capacity	160 L



Pneumatic impact wrench



CT38112

- 3/8" square tool holder
- Quick coupling
- Variable torque
- Reverse function



520 Nm

No-load speed	9800 min ⁻¹
Recommended working pressure	87-116 psi
Max, bolt / nut diameter	M12
Tool holder	9,5 mm
Thread of air connector	1/4"
Inner Ø of air hose	10 mm
Weight	1,6 kg

CT38113 CT38113 BMC*

- 1/2" square tool holder
- Quick coupling
- Variable torque
- Reverse function



660 Nm

No-load speed	8000 min ⁻¹
Recommended working pressure	87-116 psi
Max, bolt / nut diameter	M16
Tool holder	12,7 mm
Thread of air connector	1/4"
Inner Ø of air hose	10 mm
Weight	2,6 kg

Pneumatic impact wrench



CT38115 CT38115 BMC*

- 1/2" square tool holder
- Quick coupling
- Variable torque
- Reverse function



800 Nm

No-load speed	8000 min ⁻¹
Recommended working pressure	87-116 psi
Max, bolt / nut diameter	M16
Tool holder	12,7 mm
Thread of air connector	1/4"
Inner Ø of air hose	10 mm
Weight	2,1 kg

CT38114 CT38114 BMC*

- 3/4" square tool holder
- Quick coupling
- Variable torque
- Reverse function



1200 Nm

No-load speed	7000 min ⁻¹
Recommended working pressure	87-116 psi
Max, bolt / nut diameter	M22
Tool holder	19 mm
Thread of air connector	3/8"
Inner Ø of air hose	13 mm
Weight	4 kg



Pneumatic impact wrench



CT38085 BMC

- 1" square tool holder
- Quick coupling
- Variable torque
- Reverse function



2180 Nm

No-load speed	4200 min ⁻¹
Recommended working pressure	116-174 psi
Max, bolt / nut diameter	M39
Tool holder	25,4 mm
Thread of air connector	1/2"
Inner Ø of air hose	13 mm
Weight	14 kg

CT38116 BMC

- 1" square tool holder
- Quick coupling
- Variable torque
- Reverse function



3200 Nm

No-load speed	3200 min ⁻¹
Recommended working pressure	116-145 psi
Max, bolt / nut diameter	M42
Tool holder	25,4 mm
Thread of air connector	1/2"
Inner Ø of air hose	13 mm
Weight	16,1 kg

AIR TOOLS

Pneumatic impact wrench



CT38083 BMC

- 1" square tool holder
- Quick coupling
- Variable torque
- Reverse function



3260 Nm

No-load speed	3600 min ⁻¹
Recommended working pressure	116-174 psi
Max, bolt / nut diameter	M48
Tool holder	25,4 mm
Thread of air connector	1/2"
Inner Ø of air hose	13 mm
Weight	18,5 kg

CT38084 BMC

- 1" square tool holder
- Quick coupling
- Variable torque
- Reverse function



3800 Nm

No-load speed	3300 min ⁻¹
Recommended working pressure	116-174 psi
Max, bolt / nut diameter	M48
Tool holder	25,4 mm
Thread of air connector	1/2"
Inner Ø of air hose	13 mm
Weight	19 kg

Grease injector



CT38097

- Quick coupling
- Oil-water separator
- Universal 360° wheels



300-400 bar

Pressure ratio	50:1
Compressed air	6-8 bar
Diameter of air cylinder	70 mm
Travel	35 mm
Quantity of oil transportation	0,85 l/min
Tank capacity	12 L
Weight	15 kg

CT38098

- Quick coupling
- Oil-water separator
- Universal 360° wheels
- Square base



300-400 bar

Pressure ratio	50:1
Compressed air	6-8 bar
Diameter of air cylinder	70 mm
Travel	35 mm
Quantity of oil transportation	0,85 l/min
Tank capacity	30 L
Weight	18 kg

Grease injector



CT38099

- Quick coupling
- Oil-water separator
- Universal 360° wheels
- Square base



300-400 bar

Pressure ratio	50:1
Compressed air	6-8 bar
Diameter of air cylinder	70 mm
Travel	35 mm
Quantity of oil transportation	0,85 l/min
Tank capacity	45 L
Weight	19 kg



AIR TOOLS

Air brad nailer



CT38106 BMC

- Change of air discharge direction
- Quick coupling
- Soft grip



70 - 110 psi

Load capacity	100 pcs
Nails length	15-50 mm
Wire size	Ga, 18
Maximum pressure	120 psi
Activation mode	single sequential actuation
Thread of air connector	1/4"
Weight	1,4 kg

CT38152 BMC

- Quick coupling
- Soft grip



60 - 100 psi

Load capacity	100 pcs
Staples leg	6-13 mm
Fastener size	20 Gauge (1,2 x 0,6 mm)
Recommended working pressure	60 - 100 psi
Thread of air connector	1/4"
Weight	0,9 kg

Air brad nailer



CT38107 BMC

- Change of air discharge direction
- Quick coupling
- Soft grip



60 - 100 psi

Load capacity	100 pcs
Nails length	15-50 mm
Crown	5,7 mm
Wire size	Ga, 18
Staples leg	16 - 40 mm
Max. pressure	120 psi
Activation mode	single sequential actuation
Thread of air connector	1/4"
Weight	1,6 kg



Tyre inflator



CT38146

- 1/4" air inlet
- Double valve, aluminium body design
- Dual graduated scale bar/psi
- Liquid filled gauge



0,2-0,4 MPa

Hose length	440 mm
Gauge pressure range	0-170 psi
Thread of air connector	1/4"

CT38149

- 1/4" air inlet
- Double valve, aluminium body design
- Digital display, accuracy up to ±1psi
- 3 measuring units psi/bar/kPa



0,2-0,4 MPa

Hose length	440 mm
Gauge pressure range	0-200 psi
Thread of air connector	1/4"

AIR TOOLS

Tyre inflator



CT38150

- 1/4" air inlet
- Double valve, aluminium body high-strength design
- Dual graduated scale bar/psi
- Liquid filled gauge



0,2-0,6 MPa

Hose length	750 mm
Gauge pressure range	0-170 psi
Thread of air connector	1/4"

CT38151

- 1/4" air inlet
- Double valve, aluminium body high strength design
- Digital display, accuracy up to ±1psi
- 3 measuring units psi/bar/kPa



0,2-0,6 MPa

Hose length	750 mm
Gauge pressure range	0-260 psi
Thread of air connector	1/4"

Hydraulic trolley jack



CT39011

- Overload protection
- Double pump design
- Universal joint structure improving service life and reducing maintenance cost
- Ultra low position design, applicable to all small cars

Capacity	3 T
Max Height	500 mm
Min Height	75 mm
Stroke	425 mm
With Rubber Pad And Tool Tray	
Without Foot Pedal	



Hydraulic engine crane



CT39012

- Overload protection
- The four hole position stiffening arm can realize four different lengths and four load capacities
- Folding design
- Universal wheel structure

Capacity	2 T
Working Range	0 - 1890 mm



AIR TOOLS

Tile cutter



CT44058 BMC*

- Integrated ruler
- Angular guide
- Soft grip



Max, cutting width of tile	600 mm
Max, cutting thickness of tile	13 mm
Max diagonal cut of tile	460 mm
Dimension	82 x 40,2 x 27,5 cm

Tile cutter



CT44119 TB

- cutting length 800mm
- depth 14mm
- bottom plate Q235
- TPR handle



Cutting length

32"

Tile cutter



CT44120 TB

- cutting length 1200mm
- depth 16mm
- bottom plate Q235
- TPR handle



Cutting length

48"

Vibrator (handheld)



CT44126

- Self locking switch, capable of continuous operation
- Pure copper high-power motor
- External carbon brush for easy replacement



Rated Voltage
A.C.Frequency
Power
Rotational speed

220 V
50 Hz
1100 W
4200 rpm

Tile Cutter Blades



CAXT-W22A

- tungsten steel



Size

φ22xφ6x10,5

CAXT-W22B

- tungsten steel



Size

φ22xφ6x6

Manual tile cutter



CT44121 TB

- Mximum cutting length:1000mm
- Maxium cutting tile thickness:14mm
- Metal base: Q235
- Cutting blade,size: φ22*φ6*10,5 with ball bearings
- Handle material:TPR



Cutting length

40"

Concrete vibrator head



CAXV-HAA2035

- Self locking switch, capable of continuous operation
- Pure copper high-power motor
- External carbon brush for easy replacement



Diameter and length
Frequency of vibration
Amplitude
Flexible shaft diameter
Hose diameter

Ø35*2 m
200 HZ
1,5 mm
10 mm
30 mm

AIR TOOLS

ACCESSORIES



Screwdriver Bits

BITS

		Head size	Length mm	Pack units
CTSBP0001		PH1	25	6 pcs
CTSBP0002	⊕	PH2	25	6 pcs
CTSBP0003		PH3	25	6 pcs
CTSBP0004		PH1	30	6 pcs
CTSBP0005	⊕	PH2	30	6 pcs
CTSBP0006		PH3	30	6 pcs
CTSBP0007		PH1	50	5 pcs
CTSBP0008	⊕	PH2	50	5 pcs
CTSBP0009		PH3	50	5 pcs
CTSBP0010		PH1	75	4 pcs
CTSBP0011	⊕	PH2	75	4 pcs
CTSBP0012		PH3	75	4 pcs

CTSBP0013		PZ1	25	6 pcs
CTSBP0014	⊗	PZ2	25	6 pcs
CTSBP0015		PZ3	25	6 pcs
CTSBP0016		PZ1	30	6 pcs
CTSBP0017	⊗	PZ2	30	6 pcs
CTSBP0018		PZ3	30	6 pcs
CTSBP0019		PZ1	50	5 pcs
CTSBP0020	⊗	PZ2	50	5 pcs
CTSBP0021		PZ3	50	5 pcs
CTSBP0022		PZ1	75	4 pcs
CTSBP0023	⊗	PZ2	75	4 pcs
CTSBP0024		PZ3	75	4 pcs

CTSBP0041		T8	25	6 pcs
CTSBP0042		T10	25	6 pcs
CTSBP0043		T15	25	6 pcs
CTSBP0044		T20	25	6 pcs
CTSBP0045	⊗	T25	25	6 pcs
CTSBP0046		T27	25	6 pcs
CTSBP0047		T30	25	6 pcs
CTSBP0048		T40	25	6 pcs
CTSBP0049		T50	25	6 pcs
CTSBP0050		T10	50	5 pcs
CTSBP0051		T15	50	5 pcs
CTSBP0052		T20	50	5 pcs
CTSBP0053	⊗	T25	50	5 pcs
CTSBP0054		T27	50	5 pcs
CTSBP0055		T30	50	5 pcs
CTSBP0056		T40	50	5 pcs

CTSBP0057		H2	25	6 pcs
CTSBP0058		H2,5	25	6 pcs
CTSBP0059	⊙	H3	25	6 pcs
CTSBP0060		H4	25	6 pcs
CTSBP0061		H5	25	6 pcs
CTSBP0062		H6	25	6 pcs

CTSBP0063		SL4,0	25	6 pcs
CTSBP0064		SL4,5	25	6 pcs
CTSBP0065	⊖	SL5,5	25	6 pcs
CTSBP0066		SL6,0	25	6 pcs
CTSBP0067		SL6,5	25	6 pcs
CTSBP0068		SL8,0	25	6 pcs
CTSBP0069		SL4,0	50	5 pcs
CTSBP0070		SL4,5	50	5 pcs
CTSBP0071	⊖	SL5,5	50	5 pcs
CTSBP0072		SL6,0	50	5 pcs
CTSBP0073		SL6,5	50	5 pcs

Reduced Screwdriver Bits

BITS

		Head size	Length mm	Pack units
CTSBP0025		PH1	110	3 pcs
CTSBP0026	⊕	PH2	110	3 pcs
CTSBP0027		PH3	110	3 pcs
CTSBP0028		PZ1	110	3 pcs
CTSBP0029	⊗	PZ2	110	3 pcs
CTSBP0030		PZ3	110	3 pcs

Double Screwdriver Bits

BITS

		Head size	Length mm	Pack units
CTSBP0031		PH0	50	5 pcs
CTSBP0032		PH1	50	5 pcs
CTSBP0033	⊕	PH2	50	5 pcs
CTSBP0034		PH3	50	5 pcs
CTSBP0035		PH4	50	5 pcs
CTSBP0036		PZ0	50	5 pcs
CTSBP0037		PZ1	50	5 pcs
CTSBP0038	⊗	PZ2	50	5 pcs
CTSBP0039		PZ3	50	5 pcs
CTSBP0040		PZ4	50	5 pcs

Screwdriver Bit Holders

BITS

		Magnet		Length mm	Pack units
CTSBP0083		+	with cap	56	1 pc
CTSBP0084		+	with cap	75	1 pc
CTSBP0085			quick release	60	1 pc
CTSBP0086			quick release	75	1 pc
CTSBP0087			quick release	150	1 pc
CTSBP0088		+	-	50	1 pc
CTSBP0089		+	-	60	1 pc
CTSBP0090		+	-	75	1 pc
CTSBP0091		+	-	150	1 pc

Nut Setters

BITS

		Magnet		Length mm	Pack units
CTSBP0074			5	36	1 pc
CTSBP0075			5,5	36	1 pc
CTSBP0076		+	6	48	1 pc
CTSBP0077		+	7	48	1 pc
CTSBP0078		+	8	48	1 pc
CTSBP0079	⊙	+	10	48	1 pc
CTSBP0080		+	11	48	1 pc
CTSBP0081		+	12	48	1 pc
CTSBP0082		+	13	48	1 pc
CTSBP0106		+	8	65	1 pc
CTSBP0107		+	10	65	1 pc

Screwdriver Bits Assorted

BITS

	Contents	Pack units
CTSBP0092	  PH1-2-3, PZ1-2-3 x 25mm	6 pcs
CTSBP0093	  T10-15-20-25-30-40 x 25mm	6 pcs
CTSBP0094	  H2-2,5-3-4-5-6 x 25mm	6 pcs
CTSBP0095	  PH1-2-3 x 50mm	3 pcs
CTSBP0096	  PZ1-2-3 x 50mm	3 pcs
CTSBP0097	  SL4,0-4,5-5,5 x 50mm	3 pcs
CTSBP0098	  SL4,5-5,5-6,5 x 50mm	3 pcs
CTSBP0099	  T10-15-20 x 50mm	3 pcs
CTSBP0100	  T20-25-30 x 50mm	3 pcs
CTSBP0101	  T25-30-40 x 50mm	3 pcs

Screwdriver Bits Sets

BITS



	Contents	Pack units
CTSBP0103	33 pcs screwdriver bits set - Single bits 25mm: SL3, SL4, SL5, SL6, T15, T20, T25, T30, PH0, PH1, PH2, PH3, PZ1, PZ2, PZ3, H4, H5 - Double bits 45mm: SL5xPH2, SL6xPH3, SL6,5xPH3, PH1xPH2 - Single bits 75mm: PH1, PH2 - Adjustable adaptor: 80mm - Magnetic nut holder: 8x48, 10x48mm	33 pcs

Screwdriver / Drill Bits Sets

BITS



	Contents	Pack units
CTSBP0102	16 pcs drill and screwdriver bits set - Hex shank HSS drill bits TiN coated: 5, 6, 8mm - Hex shank masonry drill bits: 5, 6, 8mm - Hex shank wood drill bits: 5, 6, 8mm - Adjustable magnetic bit holder: 80mm - Screwdriver bits 50mm: PH1, PH2, SL5, SL6, T20, T25	16 pcs



	Contents	Pack units
CTSBP0104	19 pcs drill and screwdriver bits set - Multi-facet point HSS twist drill bits: 3, 3,2, 3,5, 4, 4,5, 5, 6, 6,5mm - Sockets: 6, 8,10, 11mm - Single bits 25mm: PH1, PH2, PH3, PZ2, PZ3, T20, T25 - Adjustable adaptor: 80mm	19 pcs

Hss-G Drill Bits (Din3126 135°, E6,3)

BITS



	Diameter	Total length	Working length	Pack units
CTHDP0060	3,0	47	16	1 pc
CTHDP0061	3,3	47	16	1 pc
CTHDP0062	3,5	47	16	1 pc
CTHDP0063	4,0	53	20	1 pc
CTHDP0064	4,2	53	20	1 pc
CTHDP0065	4,5	53	20	1 pc
CTHDP0066	5,0	59	26	1 pc
CTHDP0067	6,0	59	26	1 pc
CTHDP0068	7,0	60	30	1 pc
CTHDP0069	8,0	60	32	1 pc

HSS-G drill bits (DIN338 135°)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0001	1,0	34	12	10 pcs
CTHDP0002	1,5	40	18	10 pcs
CTHDP0003	2,0	49	24	10 pcs
CTHDP0004	2,5	57	30	10 pcs
CTHDP0005	2,8	61	33	10 pcs
CTHDP0006	3,0	61	33	10 pcs
CTHDP0007	3,2	65	36	10 pcs
CTHDP0008	3,3	65	36	10 pcs
CTHDP0009	3,5	70	39	10 pcs
CTHDP0010	4,0	75	43	10 pcs
CTHDP0011	4,1	75	43	10 pcs
CTHDP0012	4,2	75	43	10 pcs
CTHDP0013	4,5	80	47	10 pcs
CTHDP0014	4,8	86	52	10 pcs
CTHDP0015	5,0	86	52	10 pcs
CTHDP0016	5,2	86	52	10 pcs
CTHDP0017	5,5	93	57	10 pcs
CTHDP0018	6,0	93	57	10 pcs
CTHDP0019	6,5	101	63	10 pcs
CTHDP0020	6,8	109	69	10 pcs
CTHDP0021	7,0	109	69	10 pcs
CTHDP0022	7,5	109	69	5 pcs
CTHDP0023	8,0	117	75	5 pcs
CTHDP0024	8,5	117	75	5 pcs
CTHDP0025	9,0	125	81	5 pcs
CTHDP0026	9,5	125	81	5 pcs
CTHDP0027	10	133	87	5 pcs
CTHDP0028	11	142	94	5 pcs
CTHDP0029	12	151	101	5 pcs
CTHDP0030	13	151	101	5 pcs
CTHDP0356	13,5	-	-	1 pc
CTHDP0357	14	-	-	1 pc
CTHDP0358	14,5	-	-	1 pc
CTHDP0359	15	-	-	1 pc
CTHDP0360	15,5	-	-	1 pc
CTHDP0361	16	-	-	1 pc
CTHDP0362	16,5	-	-	1 pc
CTHDP0363	17	-	-	1 pc
CTHDP0364	17,5	-	-	1 pc
CTHDP0365	18	-	-	1 pc
CTHDP0366	18,5	-	-	1 pc
CTHDP0367	19	-	-	1 pc
CTHDP0368	19,5	-	-	1 pc
CTHDP0369	20	-	-	1 pc
CTHDP0031	1,0	34	12	2 pcs
CTHDP0032	1,5	40	18	2 pcs
CTHDP0033	2,0	49	24	2 pcs
CTHDP0034	2,5	57	30	2 pcs
CTHDP0035	3,0	61	33	2 pcs
CTHDP0036	3,2	65	36	2 pcs
CTHDP0037	3,5	70	39	2 pcs
CTHDP0038	4,0	75	43	2 pcs
CTHDP0039	4,2	75	43	1 pc
CTHDP0040	4,5	80	47	1 pc
CTHDP0041	4,8	86	52	1 pc
CTHDP0042	5,0	86	52	1 pc

	Diameter	Total length	Working length	Pack units
CTHDP0043	5,5	93	57	1 pc
CTHDP0044	6,0	93	57	1 pc
CTHDP0045	6,5	101	63	1 pc
CTHDP0046	6,8	109	69	1 pc
CTHDP0047	7,0	109	69	1 pc
CTHDP0048	7,5	109	69	1 pc
CTHDP0049	8,0	117	75	1 pc
CTHDP0050	8,5	117	75	1 pc
CTHDP0051	9,0	125	81	1 pc
CTHDP0052	9,5	125	81	1 pc
CTHDP0053	10	133	87	1 pc
CTHDP0054	11	142	94	1 pc
CTHDP0055	12	151	101	1 pc
CTHDP0056	13	151	101	1 pc

HSS-G drill bits sets (DIN338 135°)

METAL DRILL BITS



	Contents	Pack units
CTHDP0057	6 pcs HSS-G drill bits set - HSS-G drill bits DIN338 135°: 2/3/4/5/6/8mm	6 pcs



	Contents	Pack units
CTHDP0058	19 pcs HSS-G drill bits set - HSS-G drill bits DIN338 135°: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8/8,5/9/9,5/10mm	19 pcs



	Contents	Pack units
CTHDP0059	25 pcs HSS-G drill bits set - HSS-G drill bits DIN338 135°: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8/8,5/9/9,5/10/10,5/11/11,5/12/12,5/13mm	25 pcs

ACCESSORIES

HSS-R drill bits (DIN338 Roll-milled)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0132	1,0	34	12	10 pcs
CTHDP0133	1,1	36	14	10 pcs
CTHDP0134	1,2	38	16	10 pcs
CTHDP0135	1,3	38	16	10 pcs
CTHDP0136	1,4	40	18	10 pcs
CTHDP0137	1,5	40	18	10 pcs
CTHDP0138	1,6	43	20	10 pcs
CTHDP0139	1,7	43	20	10 pcs
CTHDP0140	1,8	46	22	10 pcs
CTHDP0141	1,9	46	22	10 pcs
CTHDP0142	2,0	49	24	10 pcs
CTHDP0143	2,1	49	24	10 pcs
CTHDP0144	2,2	53	27	10 pcs
CTHDP0145	2,3	53	27	10 pcs
CTHDP0146	2,4	57	30	10 pcs
CTHDP0147	2,5	57	30	10 pcs
CTHDP0148	2,6	57	30	10 pcs
CTHDP0149	2,7	61	33	10 pcs
CTHDP0150	2,8	61	33	10 pcs
CTHDP0151	2,9	61	33	10 pcs
CTHDP0152	3,0	61	33	10 pcs
CTHDP0153	3,1	65	36	10 pcs
CTHDP0154	3,2	65	36	10 pcs
CTHDP0155	3,3	65	36	10 pcs
CTHDP0156	3,4	70	39	10 pcs
CTHDP0157	3,5	70	39	10 pcs
CTHDP0158	3,6	70	39	10 pcs
CTHDP0159	3,7	70	39	10 pcs
CTHDP0160	3,8	75	43	10 pcs
CTHDP0161	3,9	75	43	10 pcs
CTHDP0162	4,0	75	43	10 pcs
CTHDP0163	4,1	75	43	10 pcs
CTHDP0164	4,2	75	43	10 pcs
CTHDP0165	4,3	80	47	10 pcs
CTHDP0166	4,4	80	47	10 pcs
CTHDP0167	4,5	80	47	10 pcs
CTHDP0168	4,6	80	47	10 pcs
CTHDP0169	4,7	80	47	10 pcs
CTHDP0170	4,8	86	52	10 pcs
CTHDP0171	5,0	86	52	10 pcs
CTHDP0172	5,1	86	52	10 pcs
CTHDP0173	5,2	86	52	10 pcs
CTHDP0174	5,3	93	57	10 pcs
CTHDP0175	5,4	93	57	10 pcs
CTHDP0176	5,5	93	57	10 pcs
CTHDP0177	5,6	93	57	10 pcs
CTHDP0178	5,7	93	57	10 pcs
CTHDP0179	5,8	93	57	10 pcs
CTHDP0180	5,9	93	57	10 pcs
CTHDP0181	6,0	93	57	10 pcs
CTHDP0182	6,1	101	63	10 pcs
CTHDP0183	6,2	101	63	10 pcs

	Diameter	Total length	Working length	Pack units
CTHDP0184	6,3	101	63	10 pcs
CTHDP0185	6,4	101	63	10 pcs
CTHDP0186	6,5	101	63	10 pcs
CTHDP0187	6,6	101	63	10 pcs
CTHDP0188	6,7	101	63	10 pcs
CTHDP0189	6,8	109	63	10 pcs
CTHDP0190	6,9	109	63	10 pcs
CTHDP0191	7,0	109	63	10 pcs
CTHDP0192	7,1	109	63	10 pcs
CTHDP0193	7,2	109	63	10 pcs
CTHDP0194	7,3	109	63	10 pcs
CTHDP0195	7,4	109	63	10 pcs
CTHDP0196	7,5	109	63	10 pcs
CTHDP0197	7,6	117	75	10 pcs
CTHDP0198	7,7	117	75	10 pcs
CTHDP0199	7,8	117	75	10 pcs
CTHDP0200	7,9	117	75	10 pcs
CTHDP0201	8,0	117	75	10 pcs
CTHDP0202	8,1	117	75	5 pcs
CTHDP0203	8,2	117	75	5 pcs
CTHDP0204	8,3	117	75	5 pcs
CTHDP0205	8,4	117	75	5 pcs
CTHDP0206	8,5	117	75	5 pcs
CTHDP0207	8,6	125	81	5 pcs
CTHDP0208	8,7	125	81	5 pcs
CTHDP0209	8,8	125	81	5 pcs
CTHDP0210	8,9	125	81	5 pcs
CTHDP0211	9,0	125	81	5 pcs
CTHDP0212	9,1	125	81	5 pcs
CTHDP0213	9,2	125	81	5 pcs
CTHDP0214	9,3	125	81	5 pcs
CTHDP0215	9,4	125	81	5 pcs
CTHDP0216	9,5	125	81	5 pcs
CTHDP0217	9,6	133	87	5 pcs
CTHDP0218	9,7	133	87	5 pcs
CTHDP0219	9,8	133	87	5 pcs
CTHDP0220	9,9	133	87	5 pcs
CTHDP0221	10	133	87	5 pcs
CTHDP0222	10,5	133	87	5 pcs
CTHDP0223	11	142	94	5 pcs
CTHDP0224	1,5	142	94	5 pcs
CTHDP0225	12	151	101	5 pcs
CTHDP0226	12,5	151	101	5 pcs
CTHDP0227	13	151	101	5 pcs
CTHDP0228	13,5	-	-	5 pcs
CTHDP0229	14	-	-	5 pcs
CTHDP0230	14,5	-	-	5 pcs
CTHDP0231	15	-	-	5 pcs
CTHDP0232	15,5	-	-	5 pcs
CTHDP0233	16	-	-	3 pcs
CTHDP0234	16,5	-	-	3 pcs
CTHDP0235	17	-	-	3 pcs
CTHDP0236	17,5	-	-	3 pcs
CTHDP0237	18	-	-	3 pcs
CTHDP0238	18,5	-	-	3 pcs
CTHDP0239	19	-	-	3 pcs
CTHDP0240	19,5	-	-	3 pcs
CTHDP0241	20	-	-	3 pcs
CTHDP0242	1,0	34	12	2 pcs
CTHDP0243	1,5	40	18	2 pcs
CTHDP0244	2,0	49	24	2 pcs
CTHDP0245	2,5	57	30	2 pcs
CTHDP0246	3,0	61	33	2 pcs
CTHDP0247	3,5	70	39	2 pcs
CTHDP0248	4,0	75	43	2 pcs
CTHDP0249	4,5	80	47	1 pc
CTHDP0250	5,0	86	52	1 pc
CTHDP0251	5,5	93	57	1 pc
CTHDP0252	6,0	93	57	1 pc
CTHDP0253	6,5	101	63	1 pc
CTHDP0254	7,0	109	63	1 pc
CTHDP0255	7,5	109	63	1 pc
CTHDP0256	8,0	117	75	1 pc
CTHDP0257	8,5	117	75	1 pc

HSS-R drill bits (DIN338 Roll-milled)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0258	9,0	125	81	1 pc
CTHDP0259	9,5	125	81	1 pc
CTHDP0260	10	133	87	1 pc
CTHDP0261	10,5	133	87	1 pc
CTHDP0262	11	142	94	1 pc
CTHDP0263	11,5	142	94	1 pc
CTHDP0264	12	151	101	1 pc
CTHDP0265	12,5	151	101	1 pc
CTHDP0266	13	151	101	1 pc

HSS-R drill bits SETS (DIN338 Roll-milled)

METAL DRILL BITS



	Contents	Pack units
CTHDP0267	6 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 2/3/4/5/6/8mm	6 pcs



	Contents	Pack units
CTHDP0268	10 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 1/2/3/4/5/6/8/9/10mm	10 pcs



	Contents	Pack units
CTHDP0269	13 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 1,5/2/2,5/3/3,2/3,5/4/4,5/4,8/5/5,5/6/6,5mm	13 pcs



	Contents	Pack units
CTHDP0270	13 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8mm	13 pcs



	Contents	Pack units
CTHDP0271	19 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8 8,5/9/9,5/10mm	19 pcs



	Contents	Pack units
CTHDP0272	25 pcs HSS-R drill bits set - HSS-R drill bits DIN338 Roll-milled: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8 8,5/9/9,5/10/10,5/11/11,5/12/12,5/13mm	25 pcs

HSS-G drill bits (DIN340, long)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0074	2	85	56	2 pcs
CTHDP0075	2,5	95	62	2 pcs
CTHDP0076	3	100	66	2 pcs
CTHDP0077	3,1	106	69	2 pcs
CTHDP0078	3,2	106	69	2 pcs
CTHDP0079	3,3	112	73	2 pcs
CTHDP0080	3,5	112	73	2 pcs
CTHDP0081	4	119	78	2 pcs
CTHDP0082	4,1	119	78	1 pc
CTHDP0083	4,2	119	78	1 pc
CTHDP0084	4,5	126	82	1 pc
CTHDP0085	4,8	132	87	1 pc
CTHDP0086	5	132	87	1 pc
CTHDP0087	6	139	91	1 pc
CTHDP0088	6,5	148	97	1 pc
CTHDP0089	7	156	102	1 pc
CTHDP0090	9	175	115	1 pc
CTHDP0091	10	184	121	1 pc
CTHDP0092	11	195	128	1 pc
CTHDP0093	12	205	134	1 pc
CTHDP0094	13	205	134	1 pc

HSS-GS double end drill bits

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0095	1,0	-	-	10 pcs
CTHDP0096	1,5	-	-	10 pcs
CTHDP0097	2,0	-	-	10 pcs
CTHDP0098	2,5	-	-	10 pcs
CTHDP0099	3,0	-	-	10 pcs
CTHDP0100	3,5	-	-	10 pcs
CTHDP0101	4,0	-	-	10 pcs
CTHDP0102	4,5	-	-	10 pcs
CTHDP0103	5,0	-	-	10 pcs
CTHDP0104	5,5	-	-	10 pcs
CTHDP0105	6,0	-	-	10 pcs
CTHDP0106	6,5	-	-	10 pcs
CTHDP0107	7,0	-	-	10 pcs
CTHDP0108	7,5	-	-	10 pcs
CTHDP0109	8,0	-	-	10 pcs
CTHDP0110	8,5	-	-	5 pcs
CTHDP0111	9,0	-	-	5 pcs
CTHDP0112	9,5	-	-	5 pcs
CTHDP0113	10	-	-	5 pcs
CTHDP0114	10,5	-	-	5 pcs
CTHDP0115	11	-	-	5 pcs
CTHDP0116	11,5	-	-	5 pcs
CTHDP0117	12	-	-	5 pcs
CTHDP0118	12,5	-	-	5 pcs
CTHDP0119	13	-	-	5 pcs
CTHDP0120	13,5	-	-	5 pcs
CTHDP0121	14	-	-	5 pcs
CTHDP0122	14,5	-	-	5 pcs
CTHDP0123	15	-	-	5 pcs
CTHDP0124	15,5	-	-	5 pcs
CTHDP0125	16	-	-	5 pcs
CTHDP0126	16,5	-	-	3 pcs
CTHDP0127	17	-	-	3 pcs
CTHDP0128	17,5	-	-	3 pcs
CTHDP0129	18	-	-	3 pcs
CTHDP0130	19	-	-	3 pcs
CTHDP0131	20	-	-	3 pcs

	Diameter	Total length	Working length	Pack units
CTHDP0279	3,5	70	39	2 pcs
CTHDP0280	4,0	75	43	2 pcs
CTHDP0281	4,2	75	43	1 pc
CTHDP0282	4,5	80	47	1 pc
CTHDP0283	4,8	86	52	1 pc
CTHDP0284	5,0	86	52	1 pc
CTHDP0285	5,5	93	57	1 pc
CTHDP0286	6,0	93	57	1 pc
CTHDP0287	6,5	101	63	1 pc
CTHDP0288	6,8	109	63	1 pc
CTHDP0289	7,0	109	63	1 pc
CTHDP0290	7,5	109	63	1 pc
CTHDP0291	8,0	117	75	1 pc
CTHDP0292	8,5	117	75	1 pc
CTHDP0293	9,0	125	81	1 pc
CTHDP0294	9,5	125	81	1 pc
CTHDP0295	10	133	87	1 pc
CTHDP0296	10,5	133	87	1 pc
CTHDP0297	11	142	94	1 pc
CTHDP0298	11,5	142	94	1 pc
CTHDP0299	12	151	101	1 pc
CTHDP0300	12,5	151	101	1 pc
CTHDP0301	13	151	101	1 pc
CTHDP0370	1,0	34	12	10 pcs
CTHDP0371	1,5	40	18	10 pcs
CTHDP0372	2,0	49	24	10 pcs
CTHDP0373	2,5	57	30	10 pcs
CTHDP0374	3,0	61	33	10 pcs
CTHDP0375	3,2	65	36	10 pcs
CTHDP0376	3,5	70	39	10 pcs
CTHDP0377	4,0	75	43	10 pcs
CTHDP0378	4,2	75	43	10 pcs
CTHDP0379	4,5	80	47	10 pcs
CTHDP0380	4,8	86	52	10 pcs
CTHDP0381	5,0	86	52	10 pcs
CTHDP0382	5,5	93	57	10 pcs
CTHDP0383	6,0	93	57	10 pcs
CTHDP0384	6,5	101	63	10 pcs
CTHDP0385	6,8	109	63	10 pcs
CTHDP0386	7,0	109	63	10 pcs
CTHDP0387	7,5	109	63	5 pcs
CTHDP0388	8,0	117	75	5 pcs
CTHDP0389	8,5	117	75	5 pcs
CTHDP0390	9,0	125	81	5 pcs
CTHDP0391	9,5	125	81	5 pcs
CTHDP0392	10	133	87	5 pcs
CTHDP0393	10,5	133	87	5 pcs
CTHDP0394	11	142	94	5 pcs
CTHDP0395	11,5	142	94	5 pcs
CTHDP0396	12	151	101	5 pcs

HSS-TiN drill bits (DIN 338 135°)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0273	1,0	33	12	2 pcs
CTHDP0274	1,5	40	18	2 pcs
CTHDP0275	2,0	49	24	2 pcs
CTHDP0276	2,5	57	30	2 pcs
CTHDP0277	3,0	61	33	2 pcs
CTHDP0278	3,2	65	36	2 pcs

HSS-TiN drill bits (DIN 338 135°)

METAL DRILL BITS



	Contents	Pack units
CTHDP0302	6 pcs HSS-TiN drill bits set - HSS-TiN drill bits DIN338 135°: 2/3/4/5/6/8mm	6 pcs

HSS-TiN drill bits SETS (DIN 338 135°)

METAL DRILL BITS



	Contents	Pack units
CTHDP0303	13 pcs HSS-TiN drill bits set - HSS-TiN drill bits DIN338 135°: 1,5/2,2,5/3,2/3,5/4,4,5/4,8/5,5/6/6,5mm	13 pcs



	Contents	Pack units
CTHDP0304	19 pcs HSS-TiN drill bits set - HSS-TiN drill bits DIN338 135°: 1/1,5/2,2,5/3,3,5/4,4,5/5,5,5/6/6,5/7/7,5/8 8,5/9/9,5/10mm	19 pcs



	Contents	Pack units
CTHDP0305	25 pcs HSS-TiN drill bits set - HSS-TiN drill bits DIN338 135°: 1/1,5/2,2,5/3,3,5/4,4,5/5,5,5/6/6,5/7/7,5/8 8,5/9/9,5/10/10,5/11/11,5/12/12,5/13mm	25 pcs

HSS-CO drill bits (DIN 338 135°)

METAL DRILL BITS



	Diameter	Total length	Working length	Pack units
CTHDP0306	1,0	34	12	2 pcs
CTHDP0307	1,5	40	18	2 pcs
CTHDP0308	1,8	46	22	2 pcs
CTHDP0309	2	49	24	2 pcs
CTHDP0310	2,2	53	27	2 pcs
CTHDP0311	2,3	53	27	2 pcs
CTHDP0312	2,4	57	30	2 pcs
CTHDP0313	2,5	57	30	2 pcs
CTHDP0314	3,0	61	33	2 pcs
CTHDP0315	3,1	65	36	2 pcs
CTHDP0316	3,2	65	36	2 pcs
CTHDP0317	3,3	65	36	2 pcs
CTHDP0318	3,4	70	39	2 pcs
CTHDP0319	3,5	70	39	2 pcs
CTHDP0320	3,6	70	39	2 pcs

CTHDP0321	3,7	70	39	2 pcs
CTHDP0322	3,8	75	43	2 pcs
CTHDP0323	3,9	75	43	2 pcs
CTHDP0324	4,0	75	43	2 pcs
CTHDP0325	4,1	75	43	1 pc
CTHDP0326	4,2	75	43	1 pc
CTHDP0327	4,5	80	47	1 pc
CTHDP0328	4,6	80	47	1 pc
CTHDP0329	4,8	86	52	1 pc
CTHDP0330	5,0	86	52	1 pc
CTHDP0331	5,2	86	52	1 pc
CTHDP0332	5,5	93	57	1 pc
CTHDP0333	5,8	93	57	1 pc
CTHDP0334	6,0	93	57	1 pc
CTHDP0335	6,5	101	63	1 pc
CTHDP0336	6,7	101	63	1 pc
CTHDP0337	6,8	109	63	1 pc
CTHDP0338	7,0	109	63	1 pc
CTHDP0339	7,5	109	63	1 pc
CTHDP0340	8,0	117	75	1 pc
CTHDP0341	8,2	117	75	1 pc
CTHDP0342	8,5	117	75	1 pc
CTHDP0343	9,0	125	81	1 pc
CTHDP0344	9,5	125	81	1 pc
CTHDP0345	10	133	87	1 pc
CTHDP0346	10,5	133	87	1 pc
CTHDP0347	11	142	94	1 pc
CTHDP0348	11,5	142	94	1 pc
CTHDP0349	12	151	101	1 pc
CTHDP0350	12,5	151	101	1 pc
CTHDP0351	13	151	101	1 pc
CTHDP0399	1,0	34	12	10 pcs
CTHDP0400	1,5	40	18	10 pcs
CTHDP0401	1,8	46	22	10 pcs
CTHDP0402	2,0	49	24	10 pcs
CTHDP0403	2,2	53	27	10 pcs
CTHDP0404	2,3	53	27	10 pcs
CTHDP0405	2,4	57	30	10 pcs
CTHDP0406	2,5	57	30	10 pcs
CTHDP0407	3,0	61	33	10 pcs
CTHDP0408	3,1	65	36	10 pcs
CTHDP0409	3,2	65	36	10 pcs
CTHDP0410	3,3	65	36	10 pcs
CTHDP0411	3,4	70	39	10 pcs
CTHDP0412	3,5	70	39	10 pcs
CTHDP0413	3,6	70	39	10 pcs
CTHDP0414	3,7	70	39	10 pcs
CTHDP0415	3,8	75	43	10 pcs
CTHDP0416	3,9	75	43	10 pcs
CTHDP0417	4,0	75	43	10 pcs
CTHDP0418	4,1	75	43	10 pcs
CTHDP0419	4,2	75	43	10 pcs
CTHDP0420	4,5	80	47	10 pcs
CTHDP0421	4,6	80	47	10 pcs
CTHDP0422	4,8	86	52	10 pcs
CTHDP0423	5,0	86	52	10 pcs
CTHDP0424	5,2	86	52	10 pcs
CTHDP0425	5,5	93	57	10 pcs
CTHDP0426	5,8	93	57	10 pcs
CTHDP0427	6,0	93	57	10 pcs
CTHDP0428	6,5	101	63	10 pcs
CTHDP0429	6,7	101	63	10 pcs
CTHDP0430	6,8	109	63	10 pcs
CTHDP0431	7,0	109	63	10 pcs
CTHDP0432	7,5	109	63	5 pcs
CTHDP0433	8,0	117	75	5 pcs
CTHDP0434	8,2	117	75	5 pcs
CTHDP0435	8,5	117	75	5 pcs
CTHDP0436	9,0	125	81	5 pcs
CTHDP0437	9,5	125	81	5 pcs
CTHDP0438	10	133	87	5 pcs
CTHDP0439	10,5	133	87	5 pcs
CTHDP0440	11	142	94	5 pcs
CTHDP0441	11,5	142	94	5 pcs
CTHDP0442	12	151	101	5 pcs
CTHDP0443	12,5	151	101	5 pcs
CTHDP0444	13	151	101	5 pcs

HSS-CO drill bits SETS (DIN 338 135°)

METAL DRILL BITS



	Contents	Pack units
CTHDP0352	6 pcs HSS-CO drill bits set - HSS-CO drill bits DIN338 135°: 2/3/4/5/6/8mm	6 pcs



	Contents	Pack units
CTHDP0353	13 pcs HSS-CO drill bits set - HSS-CO drill bits DIN338 135°: 1,5/2/2,5/3/3,2/3,5/4/4,5/4,8/5/5,5/6/6,5mm	13 pcs



	Contents	Pack units
CTHDP0354	19 pcs HSS-CO drill bits set - HSS-CO drill bits DIN338 135°: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8 8,5/9/9,5/10mm	19 pcs



	Contents	Pack units
CTHDP0355	25 pcs HSS-CO drill bits set - HSS-CO drill bits DIN338 135°: 1/1,5/2/2,5/3/3,5/4/4,5/5/5,5/6/6,5/7/7,5/8 8,5/9/9,5/10/10,5/11/11,5/12/12,5/13mm	25 pcs

Brad point drill bits

WOOD DRILL BITS



	Diameter	Total length	Working length	Pack units
CTWDP0001	3,0	61	33	1 pc
CTWDP0002	4,0	75	43	1 pc
CTWDP0003	5,0	86	52	1 pc
CTWDP0004	6,0	97	60	1 pc
CTWDP0005	7,0	109	69	1 pc
CTWDP0006	8,0	117	75	1 pc
CTWDP0007	9,0	125	80	1 pc

CTWDP0008	10	133	87	1 pc
CTWDP0009	11	142	89	1 pc
CTWDP0010	12	151	96	1 pc
CTWDP0011	13	151	96	1 pc
CTWDP0012	14	151	97	1 pc
CTWDP0013	15	160	100	1 pc
CTWDP0014	16	160	100	1 pc
CTWDP0015	18	180	160	1 pc

Brad point drill bits SETS

WOOD DRILL BITS



	Contents	Pack units
CTWDP0016	5 pcs brad point drill bits set - Brad point drill bits: 4/5/6/8/10mm	5 pcs
CTWDP0017	8 pcs brad point drill bits set - Brad point drill bits: 3/4/5/6/7/8/9/10mm	8 pcs

FLAT drill bits

WOOD DRILL BITS



	Diameter	Total length	Working length	Pack units
CTWDP0018	6,0	152	-	1 pc
CTWDP0019	8,0	152	-	1 pc
CTWDP0020	10	152	-	1 pc
CTWDP0021	12	152	-	1 pc
CTWDP0026	22	152	-	1 pc
CTWDP0027	24	152	-	1 pc
CTWDP0028	25	152	-	1 pc
CTWDP0029	26	152	-	1 pc
CTWDP0030	28	152	-	1 pc
CTWDP0031	30	152	-	1 pc
CTWDP0032	32	152	-	1 pc
CTWDP0033	36	152	-	1 pc

FLAT drill bits extension

WOOD DRILL BITS

	Working length	Pack units
CTWDP0034	305	1 pc

AUGER drill bits

WOOD DRILL BITS



	Shank	Diameter	Total length	Pack units
CTWDP0035	Hex	10	235	1 pc
CTWDP0036	Hex	12	235	1 pc
CTWDP0037	Hex	14	235	1 pc
CTWDP0038	Hex	16	235	1 pc
CTWDP0039	Hex	18	235	1 pc
CTWDP0040	Hex	20	235	1 pc

Fostner drill bits

WOOD DRILL BITS



	Diameter	Total length	Working length	Pack units
CTWDP0041	10	90	7	1 pc
CTWDP0042	12	90	8	1 pc
CTWDP0043	14	90	8	1 pc
CTWDP0044	15	90	8,5	1 pc
CTWDP0045	16	90	9	1 pc

	Shank	Diameter	Total length	Working length	Pack units
CTMDP0016	Round	8	400	300	1 pc
CTMDP0017	Round	10	400	300	1 pc
CTMDP0018	Round	12	400	300	1 pc
CTMDP0019	Round	14	400	300	1 pc
CTMDP0020	Hex	16	400	300	1 pc
CTMDP0021	Hex	18	400	300	1 pc
CTMDP0022	Hex	20	400	300	1 pc
CTMDP0023	Hex	22	400	300	1 pc
CTMDP0024	Hex	25	400	300	1 pc
CTMDP0025	Round	8	600	450	1 pc
CTMDP0026	Round	10	600	450	1 pc
CTMDP0027	Round	12	600	450	1 pc
CTMDP0028	Round	14	600	450	1 pc
CTMDP0029	Hex	16	600	450	1 pc

Masonry drill bits (TCT)

MASONRY DRILL BITS



	Diameter	Total length	Working length	Pack units
CTMDP0001	3,0	60	30	1
CTMDP0002	4,0	75	40	1
CTMDP0003	5,0	85	50	1
CTMDP0004	6,0	100	60	1
CTMDP0005	6,5	100	60	1
CTMDP0006	7,0	100	60	1
CTMDP0007	8,0	120	80	1
CTMDP0008	9,0	120	80	1
CTMDP0009	10	120	80	1
CTMDP0010	12	150	95	1
CTMDP0011	14	150	95	1
CTMDP0012	16	150	95	1

Concrete drill bits (TCT 130°)

CONCRETE DRILL BITS



	Diameter	Total length	Working length	Pack units
CTMDP0030	3,0	60	30	1 pc
CTMDP0031	4,0	75	40	1 pc
CTMDP0032	5,0	85	50	1 pc
CTMDP0033	6,0	100	60	1 pc
CTMDP0034	6,5	100	60	1 pc
CTMDP0035	7,0	100	60	1 pc
CTMDP0036	8,0	120	80	1 pc
CTMDP0037	9,0	120	80	1 pc
CTMDP0038	10	120	80	1 pc
CTMDP0039	12	150	95	1 pc
CTMDP0040	14	150	95	1 pc
CTMDP0041	16	150	95	1 pc

Masonry drill bits (TCT) SET

MASONRY DRILL BITS



	Contents	Pack units
CTMDP0013	3 pcs Masonry drill bits set - Masonry drill bits TCT: 5/6/8mm	3 pcs
CTMDP0014	5 pcs Masonry drill bits set - Masonry drill bits TCT: 4/5/6/8/10mm	5 pcs
CTMDP0015	8 pcs Masonry drill bits set - Masonry drill bits TCT: 3/4/5/6/7/8/9/10mm	8 pcs

Concrete drill bits (TCT 130°) SET

CONCRETE DRILL BITS



	Contents	Pack units
CTMDP0042	3 pcs Concrete drill bits set - Concrete drill bits TCT 130°: 5/6/8mm	3 pcs
CTMDP0043	5 pcs Concrete drill bits set - Concrete drill bits TCT 130°: 4/5/6/8/10mm	5 pcs
CTMDP0044	8 pcs Concrete drill bits set - Concrete drill bits TCT 130°: 3/4/5/6/7/8/9/10mm	8 pcs

Masonry drill bits (long, TCT 130°)

MASONRY DRILL BITS



SDS-Plus drill bits

CONCRETE DRILL BITS



	Diameter	Total length	Working length	Pack units
CTSDP0001A	4,0	110	50	1 pc
CTSDP0002A	5,0	110	50	1 pc
CTSDP0003A	6,0	110	50	1 pc
CTSDP0115A	6,5	110	50	1 pc
CTSDP0117A	7,0	110	50	1 pc
CTSDP0004A	8,0	110	50	1 pc
CTSDP0005A	10,0	110	50	1 pc
CTSDP0006A	5,0	160	100	1 pc
CTSDP0007A	6,0	160	100	1 pc
CTSDP0134A	6,5	160	100	1 pc
CTSDP0008A	8,0	160	100	1 pc
CTSDP0118A	7,0	160	100	1 pc
CTSDP0009A	10,0	160	100	1 pc
CTSDP0010A	12,0	160	100	1 pc
CTSDP0011A	14,0	160	100	1 pc
CTSDP0012A	6,0	210	150	1 pc
CTSDP0119A	7,0	210	150	1 pc
CTSDP0013A	8,0	210	150	1 pc
CTSDP0014A	10,0	210	150	1 pc
CTSDP0015A	12,0	210	150	1 pc
CTSDP0016A	14,0	210	150	1 pc
CTSDP0017A	16,0	210	150	1 pc
CTSDP0018A	18,0	210	150	1 pc
CTSDP0019A	20,0	210	150	1 pc
CTSDP0133A	6,0	260	200	1 pc
CTSDP0137A	8,0	260	200	1 pc
CTSDP0020A	10,0	260	200	1 pc
CTSDP0021A	12,0	260	200	1 pc
CTSDP0125A	14,0	260	200	1 pc
CTSDP0126A	16,0	260	200	1 pc
CTSDP0127A	18,0	260	200	1 pc
CTSDP0128A	20,0	260	200	1 pc
CTSDP0116A	16,0	260	200	1 pc
CTSDP0022A	22,0	260	200	1 pc
CTSDP0023A	25,0	260	200	1 pc
CTSDP0129A	10,0	310	250	1 pc
CTSDP0130A	12,0	310	250	1 pc
CTSDP0024A	14,0	310	250	1 pc
CTSDP0025A	16,0	310	250	1 pc
CTSDP0026A	18,0	310	250	1 pc
CTSDP0131A	20,0	310	250	1 pc
CTSDP0138A	22,0	310	250	1 pc
CTSDP0139A	25,0	310	250	1 pc
CTSDP0140A	26,0	310	250	1 pc
CTSDP0027A	8,0	450	390	1 pc
CTSDP0028A	10,0	450	390	1 pc
CTSDP0029A	12,0	450	390	1 pc
CTSDP0030A	14,0	450	390	1 pc
CTSDP0031A	16,0	450	390	1 pc
CTSDP0032A	18,0	450	390	1 pc
CTSDP0033A	20,0	450	390	1 pc
CTSDP0034A	22,0	450	390	1 pc
CTSDP0035A	24,0	450	390	1 pc
CTSDP0036A	25,0	450	390	1 pc
CTSDP0149A	26,0	450	390	1 pc
CTSDP0135A	10,0	550	490	1 pc
CTSDP0136A	12,0	550	490	1 pc
CTSDP0141A	10,0	600	540	1 pc
CTSDP0037A	12,0	600	540	1 pc
CTSDP0038A	14,0	600	540	1 pc
CTSDP0142A	16,0	600	540	1 pc
CTSDP0143A	18,0	600	540	1 pc
CTSDP0144A	20,0	600	540	1 pc
CTSDP0145A	22,0	600	540	1 pc

	Diameter	Total length	Working length	Pack units
CTSDP0146A	25,0	600	540	1 pc
CTSDP0147A	26,0	600	540	1 pc
CTSDP0148A	28,0	600	540	1 pc
CTSDP0039A	14,0	800	740	1 pc
CTSDP0040A	16,0	800	740	1 pc
CTSDP0041A	18,0	800	740	1 pc
CTSDP0042A	20,0	800	740	1 pc
CTSDP0043A	22,0	800	740	1 pc
CTSDP0044A	25,0	800	740	1 pc
CTSDP0045A	26,0	800	740	1 pc
CTSDP0046A	28,0	800	740	1 pc
CTSDP0047A	14,0	1000	940	1 pc
CTSDP0048A	16,0	1000	940	1 pc
CTSDP0049A	18,0	1000	940	1 pc

SDS-Plus drill bits SET

CONCRETE DRILL BITS



	Contents	Pack units
CTSDP0050A	4 pcs SDS-Plus drill bits set - SDS-plus drill bits: 5/6/8/10x160mm	4 pcs



	Contents	Pack units
CTSDP0051A	8 pcs SDS-plus drill bits set - SDS-Plus drill bits: 5/6/8/10x110, 6/8/10/12x160mm	8 pcs

SDS-Plus adapter

CONCRETE DRILL BITS



	Total length	Thread	Pack units
CTSDP0190A	230	SDS PLUS	1pc

SDS-Plus connecting rod

CONCRETE DRILL BITS



	Total length	Thread	Pack units
CTSDP0152A	65	1/2-20UNF	1 pc

SDS-Plus drill bits

CONCRETE DRILL BITS (2 CUTTER CARBIDE TIP)



	Diameter	Total length	Working length	Pack units
CAR-CP1103	3	110	50	1 pc
CAR-CP11H3	3,5	110	50	1 pc
CAR-CP1104	4	110	50	1 pc
CAR-CP1604	4	160	100	1 pc
CAR-CP1105	5	110	50	1 pc
CAR-CP11H5	5,5	110	50	1 pc
CAR-CP1106	6	110	50	1 pc
CAR-CP11H6	6,5	110	50	1 pc
CAR-CP1107	7	110	50	1 pc
CAR-CP1108	8	110	50	1 pc
CAR-CP1109	9	110	50	1 pc
CAR-CP1110	10	110	50	1 pc
CAR-CP1605	5	160	100	1 pc
CAR-CP1606	6	160	100	1 pc
CAR-CP16H6	6,5	160	100	1 pc
CAR-CP1607	7	160	100	1 pc
CAR-CP1608	8	160	100	1 pc
CAR-CP1609	9	160	100	1 pc
CAR-CP1610	10	160	100	1 pc
CAR-CP1611	11	160	100	1 pc
CAR-CP1612	12	160	100	1 pc
CAR-CP1613	13	160	100	1 pc
CAR-CP1614	14	160	100	1 pc
CAR-CP1615	15	160	100	1 pc
CAR-CP1616	16	160	100	1 pc
CAR-CP2105	5	210	150	1 pc
CAR-CP21H5	5,5	210	150	1 pc
CAR-CP2106	6	210	150	1 pc
CAR-CP21H6	6,5	210	150	1 pc
CAR-CP2107	7	210	150	1 pc
CAR-CP2108	8	210	150	1 pc
CAR-CP2109	9	210	150	1 pc
CAR-CP2110	10	210	150	1 pc
CAR-CP2111	11	210	150	1 pc
CAR-CP2112	12	210	150	1 pc
CAR-CP2113	13	210	150	1 pc
CAR-CP2114	14	210	150	1 pc
CAR-CP2115	15	210	150	1 pc
CAR-CP2116	16	210	150	1 pc
CAR-CP2118	18	210	150	1 pc
CAR-CP2119	19	210	150	1 pc
CAR-CP2120	20	210	150	1 pc
CAR-CP2122	22	210	150	1 pc
CAR-CP2124	24	210	150	1 pc

CAR-CP2125	25	210	150	1 pc
CAR-CP2126	26	210	150	1 pc
CAR-CP2606	6	260	200	1 pc
CAR-CP2607	7	260	200	1 pc
CAR-CP2608	8	260	200	1 pc
CAR-CP2610	10	260	200	1 pc
CAR-CP2611	11	260	200	1 pc
CAR-CP2612	12	260	200	1 pc
CAR-CP2613	13	260	200	1 pc
CAR-CP2614	14	260	200	1 pc
CAR-CP2615	15	260	200	1 pc
CAR-CP2616	16	260	200	1 pc
CAR-CP2618	18	260	200	1 pc
CAR-CP2620	20	260	200	1 pc
CAR-CP2622	22	260	200	1 pc
CAR-CP2624	24	260	200	1 pc
CAR-CP2625	25	260	200	1 pc
CAR-CP2626	26	260	200	1 pc
CAR-CP3108	8	310	250	1 pc
CAR-CP3110	10	310	250	1 pc
CAR-CP3112	12	310	250	1 pc
CAR-CP3113	13	310	250	1 pc
CAR-CP3114	14	310	250	1 pc
CAR-CP3116	16	310	250	1 pc
CAR-CP3118	18	310	250	1 pc
CAR-CP3120	20	310	250	1 pc
CAR-CP3122	22	310	250	1 pc
CAR-CP3124	24	310	250	1 pc
CAR-CP3125	25	310	250	1 pc
CAR-CP3126	26	310	250	1 pc
CAR-CP3510	10	350	300	1 pc
CAR-CP3512	12	350	300	1 pc
CAR-CP3514	14	350	300	1 pc
CAR-CP3516	16	350	300	1 pc
CAR-CP3518	18	350	300	1 pc
CAR-CP3520	20	350	300	1 pc
CAR-CP3522	22	350	300	1 pc
CAR-CP3524	24	350	300	1 pc
CAR-CP3525	25	350	300	1 pc
CAR-CP4108	8	410	350	1 pc
CAR-CP4110	10	410	350	1 pc
CAR-CP4112	12	410	350	1 pc
CAR-CP4114	14	410	350	1 pc
CAR-CP4116	16	410	350	1 pc
CAR-CP4118	18	410	350	1 pc
CAR-CP4119	19	410	350	1 pc
CAR-CP4120	20	410	350	1 pc
CAR-CP4122	22	410	350	1 pc
CAR-CP4124	24	410	350	1 pc
CAR-CP4125	25	410	350	1 pc
CAR-CP4126	26	410	350	1 pc
CAR-CP4508	8	450	400	1 pc
CAR-CP4510	10	450	400	1 pc
CAR-CP4512	12	450	400	1 pc
CAR-CP4514	14	450	400	1 pc
CAR-CP4516	16	450	400	1 pc
CAR-CP4518	18	450	400	1 pc
CAR-CP4519	19	450	400	1 pc
CAR-CP4520	20	450	400	1 pc
CAR-CP4522	22	450	400	1 pc
CAR-CP4524	24	450	400	1 pc
CAR-CP4525	25	450	400	1 pc
CAR-CP4526	26	450	400	1 pc
CAR-CP6008	8	600	540	1 pc
CAR-CP6010	10	600	540	1 pc
CAR-CP6012	12	600	540	1 pc
CAR-CP6014	14	600	540	1 pc
CAR-CP6016	16	600	540	1 pc
CAR-CP6018	18	600	540	1 pc
CAR-CP6020	20	600	540	1 pc
CAR-CP6022	22	600	540	1 pc
CAR-CP6024	24	600	540	1 pc
CAR-CP6025	25	600	540	1 pc
CAR-CP6026	26	600	540	1 pc
CAR-CP10010	10	1000	940	1 pc
CAR-CP10012	12	1000	940	1 pc
CAR-CP10014	14	1000	940	1 pc
CAR-CP10016	16	1000	940	1 pc
CAR-CP10018	18	1000	940	1 pc
CAR-CP10020	20	1000	940	1 pc
CAR-CP10022	22	1000	940	1 pc

CAR-CP10024	24	1000	940	1 pc
CAR-CP10025	25	1000	940	1 pc
CAR-CP10026	26	1000	940	1 pc

SDS-Plus drill bits

CONCRETE DRILL BITS (4 CUTTER, 2 FLUTES)



	Diameter	Total length	Working length	Pack units
CAR-CXP1103	3	110	50	1 pc
CAR-CXP11H3	3,5	110	50	1 pc
CAR-CXP1104	4	110	50	1 pc
CAR-CXP1604	4	160	100	1 pc
CAR-CXP1105	5	110	50	1 pc
CAR-CXP11H5	5,5	110	50	1 pc
CAR-CXP1106	6	110	50	1 pc
CAR-CXP11H6	6,5	110	50	1 pc
CAR-CXP1107	7	110	50	1 pc
CAR-CXP1108	8	110	50	1 pc
CAR-CXP1109	9	110	50	1 pc
CAR-CXP1110	10	110	50	1 pc
CAR-CXP1605	5	160	100	1 pc
CAR-CXP1606	6	160	100	1 pc
CAR-CXP16H6	6,5	160	100	1 pc
CAR-CXP1607	7	160	100	1 pc
CAR-CXP1608	8	160	100	1 pc
CAR-CXP1609	9	160	100	1 pc
CAR-CXP1610	10	160	100	1 pc
CAR-CXP1611	11	160	100	1 pc
CAR-CXP1612	12	160	100	1 pc
CAR-CXP1613	13	160	100	1 pc
CAR-CXP1614	14	160	100	1 pc
CAR-CXP1615	15	160	100	1 pc
CAR-CXP1616	16	160	100	1 pc
CAR-CXP2105	5	210	150	1 pc
CAR-CXP21H5	5,5	210	150	1 pc
CAR-CXP2106	6	210	150	1 pc
CAR-CXP21H6	6,5	210	150	1 pc
CAR-CXP2107	7	210	150	1 pc
CAR-CXP2108	8	210	150	1 pc
CAR-CXP2109	9	210	150	1 pc
CAR-CXP2110	10	210	150	1 pc
CAR-CXP2111	11	210	150	1 pc
CAR-CXP2112	12	210	150	1 pc
CAR-CXP2113	13	210	150	1 pc
CAR-CXP2114	14	210	150	1 pc
CAR-CXP2115	15	210	150	1 pc
CAR-CXP2116	16	210	150	1 pc
CAR-CXP2118	18	210	150	1 pc
CAR-CXP2119	19	210	150	1 pc
CAR-CXP2120	20	210	150	1 pc
CAR-CXP2122	22	210	150	1 pc
CAR-CXP2124	24	210	150	1 pc
CAR-CXP2125	25	210	150	1 pc
CAR-CXP2126	26	210	150	1 pc
CAR-CXP2606	6	260	200	1 pc
CAR-CXP2607	7	260	200	1 pc
CAR-CXP2608	8	260	200	1 pc

CAR-CXP2610	10	260	200	1 pc
CAR-CXP2611	11	260	200	1 pc
CAR-CXP2612	12	260	200	1 pc
CAR-CXP2613	13	260	200	1 pc
CAR-CXP2614	14	260	200	1 pc
CAR-CXP2615	15	260	200	1 pc
CAR-CXP2616	16	260	200	1 pc
CAR-CXP2618	18	260	200	1 pc
CAR-CXP2620	20	260	200	1 pc
CAR-CXP2622	22	260	200	1 pc
CAR-CXP2624	24	260	200	1 pc
CAR-CXP2625	25	260	200	1 pc
CAR-CXP2626	26	260	200	1 pc
CAR-CXP3108	8	310	250	1 pc
CAR-CXP3110	10	310	250	1 pc
CAR-CXP3112	12	310	250	1 pc
CAR-CXP3113	13	310	250	1 pc
CAR-CXP3114	14	310	250	1 pc
CAR-CXP3116	16	310	250	1 pc
CAR-CXP3118	18	310	250	1 pc
CAR-CXP3120	20	310	250	1 pc
CAR-CXP3122	22	310	250	1 pc
CAR-CXP3124	24	310	250	1 pc
CAR-CXP3125	25	310	250	1 pc
CAR-CXP3126	26	310	250	1 pc
CAR-CXP3510	10	350	300	1 pc
CAR-CXP3512	12	350	300	1 pc
CAR-CXP3514	14	350	300	1 pc
CAR-CXP3516	16	350	300	1 pc
CAR-CXP3518	18	350	300	1 pc
CAR-CXP3520	20	350	300	1 pc
CAR-CXP3522	22	350	300	1 pc
CAR-CXP3524	24	350	300	1 pc
CAR-CXP3525	25	350	300	1 pc
CAR-CXP4108	8	410	350	1 pc
CAR-CXP4110	10	410	350	1 pc
CAR-CXP4112	12	410	350	1 pc
CAR-CXP4114	14	410	350	1 pc
CAR-CXP4116	16	410	350	1 pc
CAR-CXP4118	18	410	350	1 pc
CAR-CXP4119	19	410	350	1 pc
CAR-CXP4120	20	410	350	1 pc
CAR-CXP4122	22	410	350	1 pc
CAR-CXP4124	24	410	350	1 pc
CAR-CXP4125	25	410	350	1 pc
CAR-CXP4126	26	410	350	1 pc
CAR-CXP4508	8	450	400	1 pc
CAR-CXP4510	10	450	400	1 pc
CAR-CXP4512	12	450	400	1 pc
CAR-CXP4514	14	450	400	1 pc
CAR-CXP4516	16	450	400	1 pc
CAR-CXP4518	18	450	400	1 pc
CAR-CXP4519	19	450	400	1 pc
CAR-CXP4520	20	450	400	1 pc
CAR-CXP4522	22	450	400	1 pc
CAR-CXP4524	24	450	400	1 pc
CAR-CXP4525	25	450	400	1 pc
CAR-CXP4526	26	450	400	1 pc
CAR-CXP6008	8	600	540	1 pc
CAR-CXP6010	10	600	540	1 pc
CAR-CXP6012	12	600	540	1 pc
CAR-CXP6014	14	600	540	1 pc
CAR-CXP6016	16	600	540	1 pc
CAR-CXP6018	18	600	540	1 pc
CAR-CXP6020	20	600	540	1 pc
CAR-CXP6022	22	600	540	1 pc
CAR-CXP6024	24	600	540	1 pc
CAR-CXP6025	25	600	540	1 pc
CAR-CXP6026	26	600	540	1 pc
CAR-CXP10010	10	1000	940	1 pc
CAR-CXP10012	12	1000	940	1 pc
CAR-CXP10014	14	1000	940	1 pc
CAR-CXP10016	16	1000	940	1 pc
CAR-CXP10018	18	1000	940	1 pc
CAR-CXP10020	20	1000	940	1 pc
CAR-CXP10022	22	1000	940	1 pc
CAR-CXP10024	24	1000	940	1 pc
CAR-CXP10025	25	1000	940	1 pc
CAR-CXP10026	26	1000	940	1 pc

SDS-Plus drill bits

CONCRETE DRILL BITS (4 CUTTER, 4 FLUTES)



	Diameter	Total length	Working length	Pack units
CAR-CXSP1103	3	110	50	1 pc
CAR-CXSP11H3	3,5	110	50	1 pc
CAR-CXSP1104	4	110	50	1 pc
CAR-CXSP1604	4	160	100	1 pc
CAR-CXSP1105	5	110	50	1 pc
CAR-CXSP11H5	5,5	110	50	1 pc
CAR-CXSP1106	6	110	50	1 pc
CAR-CXSP11H6	6,5	110	50	1 pc
CAR-CXSP1107	7	110	50	1 pc
CAR-CXSP1108	8	110	50	1 pc
CAR-CXSP1109	9	110	50	1 pc
CAR-CXSP1110	10	110	50	1 pc
CAR-CXSP1605	5	160	100	1 pc
CAR-CXSP1606	6	160	100	1 pc
CAR-CXSP16H6	6,5	160	100	1 pc
CAR-CXSP1607	7	160	100	1 pc
CAR-CXSP1608	8	160	100	1 pc
CAR-CXSP1609	9	160	100	1 pc
CAR-CXSP1610	10	160	100	1 pc
CAR-CXSP1611	11	160	100	1 pc
CAR-CXSP1612	12	160	100	1 pc
CAR-CXSP1613	13	160	100	1 pc
CAR-CXSP1614	14	160	100	1 pc
CAR-CXSP1615	15	160	100	1 pc
CAR-CXSP1616	16	160	100	1 pc
CAR-CXSP2105	5	210	150	1 pc
CAR-CXSP21H5	5,5	210	150	1 pc
CAR-CXSP2106	6	210	150	1 pc
CAR-CXSP21H6	6,5	210	150	1 pc
CAR-CXSP2107	7	210	150	1 pc
CAR-CXSP2108	8	210	150	1 pc
CAR-CXSP2109	9	210	150	1 pc
CAR-CXSP2110	10	210	150	1 pc
CAR-CXSP2111	11	210	150	1 pc
CAR-CXSP2112	12	210	150	1 pc
CAR-CXSP2113	13	210	150	1 pc
CAR-CXSP2114	14	210	150	1 pc
CAR-CXSP2115	15	210	150	1 pc
CAR-CXSP2116	16	210	150	1 pc
CAR-CXSP2118	18	210	150	1 pc
CAR-CXSP2119	19	210	150	1 pc
CAR-CXSP2120	20	210	150	1 pc
CAR-CXSP2122	22	210	150	1 pc
CAR-CXSP2124	24	210	150	1 pc
CAR-CXSP2125	25	210	150	1 pc
CAR-CXSP2126	26	210	150	1 pc
CAR-CXSP2606	6	260	200	1 pc
CAR-CXSP2607	7	260	200	1 pc
CAR-CXSP2608	8	260	200	1 pc
CAR-CXSP2610	10	260	200	1 pc
CAR-CXSP2611	11	260	200	1 pc

CAR-CXSP2612	12	260	200	1 pc
CAR-CXSP2613	13	260	200	1 pc
CAR-CXSP2614	14	260	200	1 pc
CAR-CXSP2615	15	260	200	1 pc
CAR-CXSP2616	16	260	200	1 pc
CAR-CXSP2618	18	260	200	1 pc
CAR-CXSP2620	20	260	200	1 pc
CAR-CXSP2622	22	260	200	1 pc
CAR-CXSP2624	24	260	200	1 pc
CAR-CXSP2625	25	260	200	1 pc
CAR-CXSP2626	26	260	200	1 pc
CAR-CXSP3108	8	310	250	1 pc
CAR-CXSP3110	10	310	250	1 pc
CAR-CXSP3112	12	310	250	1 pc
CAR-CXSP3113	13	310	250	1 pc
CAR-CXSP3114	14	310	250	1 pc
CAR-CXSP3116	16	310	250	1 pc
CAR-CXSP3118	18	310	250	1 pc
CAR-CXSP3120	20	310	250	1 pc
CAR-CXSP3122	22	310	250	1 pc
CAR-CXSP3124	24	310	250	1 pc
CAR-CXSP3125	25	310	250	1 pc
CAR-CXSP3126	26	310	250	1 pc
CAR-CXSP3510	10	350	300	1 pc
CAR-CXSP3512	12	350	300	1 pc
CAR-CXSP3514	14	350	300	1 pc
CAR-CXSP3516	16	350	300	1 pc
CAR-CXSP3518	18	350	300	1 pc
CAR-CXSP3520	20	350	300	1 pc
CAR-CXSP3522	22	350	300	1 pc
CAR-CXSP3524	24	350	300	1 pc
CAR-CXSP3525	25	350	300	1 pc
CAR-CXSP4108	8	410	350	1 pc
CAR-CXSP4110	10	410	350	1 pc
CAR-CXSP4112	12	410	350	1 pc
CAR-CXSP4114	14	410	350	1 pc
CAR-CXSP4116	16	410	350	1 pc
CAR-CXSP4118	18	410	350	1 pc
CAR-CXSP4119	19	410	350	1 pc
CAR-CXSP4120	20	410	350	1 pc
CAR-CXSP4122	22	410	350	1 pc
CAR-CXSP4124	24	410	350	1 pc
CAR-CXSP4125	25	410	350	1 pc
CAR-CXSP4126	26	410	350	1 pc
CAR-CXSP4508	8	450	400	1 pc
CAR-CXSP4510	10	450	400	1 pc
CAR-CXSP4512	12	450	400	1 pc
CAR-CXSP4514	14	450	400	1 pc
CAR-CXSP4516	16	450	400	1 pc
CAR-CXSP4518	18	450	400	1 pc
CAR-CXSP4519	19	450	400	1 pc
CAR-CXSP4520	20	450	400	1 pc
CAR-CXSP4522	22	450	400	1 pc
CAR-CXSP4524	24	450	400	1 pc
CAR-CXSP4525	25	450	400	1 pc
CAR-CXSP4526	26	450	400	1 pc
CAR-CXSP6008	8	600	540	1 pc
CAR-CXSP6010	10	600	540	1 pc
CAR-CXSP6012	12	600	540	1 pc
CAR-CXSP6014	14	600	540	1 pc
CAR-CXSP6016	16	600	540	1 pc
CAR-CXSP6018	18	600	540	1 pc
CAR-CXSP6020	20	600	540	1 pc
CAR-CXSP6022	22	600	540	1 pc
CAR-CXSP6024	24	600	540	1 pc
CAR-CXSP6025	25	600	540	1 pc
CAR-CXSP6026	26	600	540	1 pc
CAR-CXSP10010	10	1000	940	1 pc
CAR-CXSP10012	12	1000	940	1 pc
CAR-CXSP10014	14	1000	940	1 pc
CAR-CXSP10016	16	1000	940	1 pc
CAR-CXSP10018	18	1000	940	1 pc
CAR-CXSP10020	20	1000	940	1 pc
CAR-CXSP10022	22	1000	940	1 pc
CAR-CXSP10024	24	1000	940	1 pc
CAR-CXSP10025	25	1000	940	1 pc
CAR-CXSP10026	26	1000	940	1 pc

SDS-Max drill bits

CONCRETE DRILL BITS



	Diameter	Total length	Working length	Pack units
CTSDP0150A	12	340	-	1 pc
CTSDP0151A	14	340	-	1 pc
CTSDP0052A	16	340	-	1 pc
CTSDP0053A	16	540	-	1 pc
CTSDP0054A	18	340	-	1 pc
CTSDP0055A	18	540	-	1 pc
CTSDP0056A	20	340	-	1 pc
CTSDP0057A	20	540	-	1 pc
CTSDP0058A	25	340	-	1 pc
CTSDP0059A	25	600	-	1 pc
CTSDP0060A	26	600	-	1 pc
CTSDP0061A	28	400	-	1 pc
CTSDP0062A	30	540	-	1 pc
CTSDP0063A	30	340	-	1 pc
CTSDP0064A	32	340	-	1 pc
CTSDP0065A	32	540	-	1 pc
CTSDP0066A	35	400	-	1 pc
CTSDP0067A	35	540	-	1 pc
CTSDP0068A	38	400	-	1 pc
CTSDP0069A	38	540	-	1 pc

SDS-Max drill bits (X blade)

CONCRETE DRILL BITS



	Diameter	Total length	Working length	Pack units
CTSDP0093A	16	340	-	1 pc
CTSDP0094A	18	340	-	1 pc
CTSDP0095A	20	340	-	1 pc
CTSDP0096A	22	340	-	1 pc
CTSDP0097A	24	340	-	1 pc
CTSDP0098A	25	340	-	1 pc
CTSDP0099A	28	400	-	1 pc
CTSDP0100A	30	400	-	1 pc
CTSDP0101A	32	400	-	1 pc
CTSDP0102A	35	400	-	1 pc
CTSDP0103A	38	400	-	1 pc
CTSDP0104A	40	400	-	1 pc
CTSDP0120A	16	540	-	1 pc
CTSDP0121A	18	540	-	1 pc
CTSDP0122A	20	540	-	1 pc
CTSDP0123A	22	540	-	1 pc
CTSDP0124A	24	540	-	1 pc
CTSDP0132A	25	540	-	1 pc
CTSDP0105A	28	540	-	1 pc
CTSDP0106A	30	540	-	1 pc
CTSDP0107A	32	540	-	1 pc
CTSDP0108A	35	540	-	1 pc
CTSDP0109A	38	540	-	1 pc
CTSDP0110A	40	540	-	1 pc
CTSDP0111A	28	800	-	1 pc
CTSDP0112A	35	800	-	1 pc
CTSDP0113A	32	1000	-	1 pc
CTSDP0114A	40	1000	-	1 pc

SDS-Max drill bits

CONCRETE DRILL BITS (4 CUTTER, 2 FLUTES)



	Diameter	Total L	Working L	Pack units
CAR-CXM3212	12	320	180	1 pc
CAR-CXM3214	14	320	180	1 pc
CAR-CXM3216	16	320	180	1 pc
CAR-CXM3218	18	320	180	1 pc
CAR-CXM3220	20	320	180	1 pc
CAR-CXM3222	22	320	180	1 pc
CAR-CXM3225	25	320	180	1 pc
CAR-CXM3228	28	320	180	1 pc
CAR-CXM3230	30	320	180	1 pc
CAR-CXM3232	32	320	180	1 pc
CAR-CXM3235	35	320	180	1 pc
CAR-CXM3235	35	320	180	1 pc
CAR-CXM3240	40	320	180	1 pc
CAR-CXM3412	12	340	200	1 pc
CAR-CXM3414	14	340	200	1 pc
CAR-CXM3416	16	340	200	1 pc
CAR-CXM3418	18	340	200	1 pc
CAR-CXM3420	20	340	200	1 pc
CAR-CXM3422	22	340	200	1 pc
CAR-CXM3425	25	340	200	1 pc
CAR-CXM3428	28	340	200	1 pc
CAR-CXM3430	30	340	200	1 pc
CAR-CXM3432	32	340	200	1 pc
CAR-CXM3435	35	340	200	1 pc
CAR-CXM3438	38	340	200	1 pc
CAR-CXM3440	40	340	200	1 pc
CAR-CXM3712	12	370	230	1 pc
CAR-CXM3714	14	370	230	1 pc
CAR-CXM3716	16	370	230	1 pc
CAR-CXM3718	18	370	230	1 pc
CAR-CXM3720	20	370	230	1 pc
CAR-CXM3722	22	370	230	1 pc
CAR-CXM3725	25	370	230	1 pc
CAR-CXM3728	28	370	230	1 pc
CAR-CXM3730	30	370	230	1 pc
CAR-CXM3732	32	370	230	1 pc
CAR-CXM3735	35	370	230	1 pc
CAR-CXM3738	35	370	230	1 pc
CAR-CXM3740	40	370	230	1 pc
CAR-CXM5212	12	520	230	1 pc
CAR-CXM5214	14	520	230	1 pc
CAR-CXM5216	16	520	230	1 pc
CAR-CXM5218	18	520	230	1 pc
CAR-CXM5220	20	520	230	1 pc
CAR-CXM5222	22	520	230	1 pc
CAR-CXM5225	25	520	230	1 pc
CAR-CXM5228	28	520	230	1 pc
CAR-CXM5230	30	520	230	1 pc
CAR-CXM5232	32	520	230	1 pc
CAR-CXM5235	35	520	230	1 pc
CAR-CXM5238	35	520	230	1 pc
CAR-CXM5240	40	520	230	1 pc
CAR-CXM5412	12	540	400	1 pc
CAR-CXM5414	14	540	400	1 pc
CAR-CXM5416	16	540	400	1 pc
CAR-CXM5418	18	540	400	1 pc
CAR-CXM5420	20	540	400	1 pc
CAR-CXM5422	22	540	400	1 pc
CAR-CXM5425	25	540	400	1 pc
CAR-CXM5428	28	540	400	1 pc
CAR-CXM5430	30	540	400	1 pc
CAR-CXM5432	32	540	400	1 pc
CAR-CXM5435	35	540	400	1 pc
CAR-CXM5438	35	540	400	1 pc
CAR-CXM5440	40	540	400	1 pc
CAR-CXM5712	12	570	430	1 pc
CAR-CXM5714	14	570	430	1 pc
CAR-CXM5716	16	570	430	1 pc

CAR-CXM5718	18	570	430	1 pc
CAR-CXM5720	20	570	430	1 pc
CAR-CXM5722	22	570	430	1 pc
CAR-CXM5725	25	570	430	1 pc
CAR-CXM5728	28	570	430	1 pc
CAR-CXM5730	30	570	430	1 pc
CAR-CXM5732	32	570	430	1 pc
CAR-CXM5735	35	570	430	1 pc
CAR-CXM5738	35	570	430	1 pc
CAR-CXM5740	40	570	430	1 pc
CAR-CXM9212	12	920	780	1 pc
CAR-CXM9214	14	920	780	1 pc
CAR-CXM9216	16	920	780	1 pc
CAR-CXM9218	18	920	780	1 pc
CAR-CXM9220	20	920	780	1 pc
CAR-CXM9222	22	920	780	1 pc
CAR-CXM9225	25	920	780	1 pc
CAR-CXM9228	28	920	780	1 pc
CAR-CXM9230	30	920	780	1 pc
CAR-CXM9232	32	920	780	1 pc
CAR-CXM9235	35	920	780	1 pc
CAR-CXM9238	35	920	780	1 pc
CAR-CXM9240	40	920	780	1 pc
CAR-CXM13216	16	1320	1180	1 pc
CAR-CXM13218	18	1320	1180	1 pc
CAR-CXM13220	20	1320	1180	1 pc
CAR-CXM13222	22	1320	1180	1 pc
CAR-CXM13225	25	1320	1180	1 pc
CAR-CXM13228	28	1320	1180	1 pc
CAR-CXM13230	30	1320	1180	1 pc
CAR-CXM13232	32	1320	1180	1 pc
CAR-CXM13235	35	1320	1180	1 pc
CAR-CXM13238	35	1320	1180	1 pc
CAR-CXM13240	40	1320	1180	1 pc

SDS-Max drill bits

CONCRETE DRILL BITS (4 CUTTER, 4 FLUTES)

	Diameter	Total L	Working L	Pack units
CAR-CXSM3212	12	320	180	1 pc
CAR-CXSM3214	14	320	180	1 pc
CAR-CXSM3216	16	320	180	1 pc
CAR-CXSM3218	18	320	180	1 pc
CAR-CXSM3220	20	320	180	1 pc
CAR-CXSM3222	22	320	180	1 pc
CAR-CXSM3225	25	320	180	1 pc
CAR-CXSM3228	28	320	180	1 pc
CAR-CXSM3230	30	320	180	1 pc
CAR-CXSM3232	32	320	180	1 pc
CAR-CXSM3235	35	320	180	1 pc
CAR-CXSM3235	35	320	180	1 pc
CAR-CXSM3240	40	320	180	1 pc
CAR-CXSM3412	12	340	200	1 pc
CAR-CXSM3414	14	340	200	1 pc
CAR-CXSM3416	16	340	200	1 pc
CAR-CXSM3418	18	340	200	1 pc
CAR-CXSM3420	20	340	200	1 pc
CAR-CXSM3422	22	340	200	1 pc
CAR-CXSM3425	25	340	200	1 pc
CAR-CXSM3428	28	340	200	1 pc
CAR-CXSM3430	30	340	200	1 pc
CAR-CXSM3432	32	340	200	1 pc
CAR-CXSM3435	35	340	200	1 pc
CAR-CXSM3438	38	340	200	1 pc

CAR-CXSM3440	40	340	200	1 pc
CAR-CXSM3712	12	370	230	1 pc
CAR-CXSM3714	14	370	230	1 pc
CAR-CXSM3716	16	370	230	1 pc
CAR-CXSM3718	18	370	230	1 pc
CAR-CXSM3720	20	370	230	1 pc
CAR-CXSM3722	22	370	230	1 pc
CAR-CXSM3725	25	370	230	1 pc
CAR-CXSM3728	28	370	230	1 pc
CAR-CXSM3730	30	370	230	1 pc
CAR-CXSM3732	32	370	230	1 pc
CAR-CXSM3735	35	370	230	1 pc
CAR-CXSM3738	35	370	230	1 pc
CAR-CXSM3740	40	370	230	1 pc
CAR-CXSM5212	12	520	230	1 pc
CAR-CXSM5214	14	520	230	1 pc
CAR-CXSM5216	16	520	230	1 pc
CAR-CXSM5218	18	520	230	1 pc
CAR-CXSM5220	20	520	230	1 pc
CAR-CXSM5222	22	520	230	1 pc
CAR-CXSM5225	25	520	230	1 pc
CAR-CXSM5228	28	520	230	1 pc
CAR-CXSM5230	30	520	230	1 pc
CAR-CXSM5232	32	520	230	1 pc
CAR-CXSM5235	35	520	230	1 pc
CAR-CXSM5238	35	520	230	1 pc
CAR-CXSM5240	40	520	230	1 pc
CAR-CXSM5412	12	540	400	1 pc
CAR-CXSM5414	14	540	400	1 pc
CAR-CXSM5416	16	540	400	1 pc
CAR-CXSM5418	18	540	400	1 pc
CAR-CXSM5420	20	540	400	1 pc
CAR-CXSM5422	22	540	400	1 pc
CAR-CXSM5425	25	540	400	1 pc
CAR-CXSM5428	28	540	400	1 pc
CAR-CXSM5430	30	540	400	1 pc
CAR-CXSM5432	32	540	400	1 pc
CAR-CXSM5435	35	540	400	1 pc
CAR-CXSM5438	35	540	400	1 pc
CAR-CXSM5440	40	540	400	1 pc
CAR-CXSM5712	12	570	430	1 pc
CAR-CXSM5714	14	570	430	1 pc
CAR-CXSM5716	16	570	430	1 pc
CAR-CXSM5718	18	570	430	1 pc
CAR-CXSM5720	20	570	430	1 pc
CAR-CXSM5722	22	570	430	1 pc
CAR-CXSM5725	25	570	430	1 pc
CAR-CXSM5728	28	570	430	1 pc
CAR-CXSM5730	30	570	430	1 pc
CAR-CXSM5732	32	570	430	1 pc
CAR-CXSM5735	35	570	430	1 pc
CAR-CXSM5738	35	570	430	1 pc
CAR-CXSM5740	40	570	430	1 pc
CAR-CXSM9212	12	920	780	1 pc
CAR-CXSM9214	14	920	780	1 pc
CAR-CXSM9216	16	920	780	1 pc
CAR-CXSM9218	18	920	780	1 pc
CAR-CXSM9220	20	920	780	1 pc
CAR-CXSM9222	22	920	780	1 pc
CAR-CXSM9225	25	920	780	1 pc
CAR-CXSM9228	28	920	780	1 pc
CAR-CXSM9230	30	920	780	1 pc
CAR-CXSM9232	32	920	780	1 pc
CAR-CXSM9235	35	920	780	1 pc
CAR-CXSM9238	35	920	780	1 pc
CAR-CXSM9240	40	920	780	1 pc
CAR-CXSM13216	16	1320	1180	1 pc
CAR-CXSM13218	18	1320	1180	1 pc
CAR-CXSM13220	20	1320	1180	1 pc
CAR-CXSM13222	22	1320	1180	1 pc
CAR-CXSM13225	25	1320	1180	1 pc
CAR-CXSM13228	28	1320	1180	1 pc
CAR-CXSM13230	30	1320	1180	1 pc
CAR-CXSM13232	32	1320	1180	1 pc
CAR-CXSM13235	35	1320	1180	1 pc
CAR-CXSM13238	35	1320	1180	1 pc
CAR-CXSM13240	40	1320	1180	1 pc

STEP DRILL BITS

MULTI DRILL BITS



	Step drill bit	Spot drill bit	Counter-sink drill bit	Diameter	Total length	Working length	Pack units
CTLDP0001	■			3 - 13	90	58	1 pc
CTLDP0002	■			13 - 25	70	38	1 pc
CTLDP0003		■		3 - 15	62	33	1 pc
CTLDP0004			■	20,5	50	19	1 pc

Ceramic / glass drill bits

MULTI DRILL BITS



	Diameter	Total length	Working length	Pack units
CTGDP0001	3,0	65	-	1 pc
CTGDP0002	4,0	65	-	1 pc
CTGDP0003	5,0	65	-	1 pc
CTGDP0004	6,0	65	-	1 pc
CTGDP0005	8,0	75	-	1 pc
CTGDP0006	10	80	-	1 pc
CTGDP0007	12	80	-	1 pc

SDS-Plus chisels

CHISELS



							Ø	L	n°
CAM-PP125	■							14	250 1 pc
CAM-PP130	■							14	300 1 pc
CAM-PP135	■							14	350 1 pc
CAM-PP140	■							14	400 1 pc
CAM-PP145	■							14	450 1 pc
CAM-PP160	■							14	600 1 pc
CAM-PP225			■					14	250 1 pc
CAM-PP230			■					14	300 1 pc
CAM-PP235			■					14	350 1 pc
CAM-PP240			■					14	400 1 pc
CAM-PP245			■					14	450 1 pc
CAM-PP260			■					14	600 1 pc
CAM-PP025	■							14	250 1 pc
CAM-PP040	■							14	400 1 pc
CAM-PP060	■							14	600 1 pc
CAM-PF028				■				25	280 1 pc
CAM-PF040				■				25	400 1 pc
CAM-PF060				■				25	600 1 pc
CAM-PS025					■			50	250 1 pc
CAM-PS040					■			50	300 1 pc
CAM-PS060					■			50	300 1 pc
CAM-PT025						■		40	250 1 pc
CAM-PT030						■		50	300 1 pc
CAM-PT030						■		80	300 1 pc
CAM-PG025							■	22	250 1 pc
CAM-PG030							■	25	300 1 pc
	Point chisel	Flat chisel	Gouge chisel	Diameter	Total length	Working length			Pack units
CTSCP0001A	■			14	250	-			1 pc
CTSCP0002A		■		14	250	20			1 pc
CTSCP0003A		■		14	250	50			1 pc
CTSCP0004A			■	-	250	-			1 pc

	Point chisel	Flat chisel	Gouge chisel	Diameter	Total length	Working length	Pack units
CTSCP0001A	■			14	250	-	1 pc
CTSCP0002A		■		14	250	20	1 pc
CTSCP0003A		■		14	250	50	1 pc
CTSCP0004A			■	-	250	-	1 pc

SDS-MAX chisels

CHISELS

	Point chisel	Flat chisel	Gouge chisel	Diameter	Total length	Working length	Pack units
CTSCP0005A	■			18	300	25	1 pc
CTSCP0006A		■		18	300	50	1 pc
CTSCP0007A		■		18	300	50	1 pc
CTSCP0008A		■		18	400	50	1 pc
CTSCP0009A			■	-	300	-	1 pc
CTSCP0010A	■			18	400	-	1 pc
CTSCP0011A		■		18	400	25	1 pc

Hex shank chisels

CHISELS



	Point chisel	Flat chisel	Gouge chisel	Diameter	Total length	Working length	Pack units
CTSCP0012A	■			28	400	-	1 pc
CTSCP0014A	■			30	410	-	1 pc
CTSCP0013A		■		28	400	80	1 pc
CTSCP0015A		■		30	410	35	1 pc

SDS-Plus hollow drill bits

HOLLOW DRILL BITS



	Diameter	Pack units
CTHMP0001	25	1 pc
CTHMP0002	30	1 pc
CTHMP0003	40	1 pc
CTHMP0004	45	1 pc
CTHMP0005	50	1 pc
CTHMP0006	55	1 pc
CTHMP0007	60	1 pc
CTHMP0008	65	1 pc
CTHMP0009	68	1 pc
CTHMP0010	70	1 pc
CTHMP0011	75	1 pc
CTHMP0012	80	1 pc
CTHMP0013	90	1 pc
CTHMP0014	100	1 pc
CTHMP0015	125	1 pc
CTHMP0016	150	1 pc

Connecting rod for Hollow bits

HOLLOW DRILL BITS



	Total length	Pack units
CTHMP0017	110	1 pc
CTHMP0018	200	1 pc
CTHMP0019	400	1 pc
CTHMP0020	600	1 pc
CTHMP0021	1000	1 pc

Bi-metal holesaws

HOLESAWS



	Diameter	Pack units
CTHSP0001	16	1 pc
CTHSP0002	17	1 pc
CTHSP0056	18	1 pc
CTHSP0003	19	1 pc
CTHSP0004	20	1 pc
CTHSP0005	21	1 pc
CTHSP0006	22	1 pc
CTHSP0057	23	1 pc
CTHSP0007	24	1 pc
CTHSP0008	25	1 pc
CTHSP0009	27	1 pc
CTHSP0010	28	1 pc
CTHSP0011	29	1 pc
CTHSP0012	30	1 pc
CTHSP0013	32	1 pc
CTHSP0014	33	1 pc
CTHSP0015	35	1 pc
CTHSP0016	37	1 pc
CTHSP0017	38	1 pc
CTHSP0018	40	1 pc
CTHSP0019	41	1 pc
CTHSP0020	43	1 pc
CTHSP0021	44	1 pc
CTHSP0022	46	1 pc
CTHSP0023	51	1 pc
CTHSP0024	52	1 pc
CTHSP0025	54	1 pc
CTHSP0026	57	1 pc
CTHSP0027	59	1 pc
CTHSP0028	60	1 pc
CTHSP0029	64	1 pc
CTHSP0030	65	1 pc
CTHSP0031	67	1 pc
CTHSP0032	68	1 pc
CTHSP0033	70	1 pc
CTHSP0034	74	1 pc
CTHSP0035	76	1 pc
CTHSP0036	79	1 pc
CTHSP0037	83	1 pc
CTHSP0038	86	1 pc
CTHSP0039	89	1 pc
CTHSP0040	92	1 pc
CTHSP0041	95	1 pc
CTHSP0042	98	1 pc
CTHSP0043	102	1 pc
CTHSP0044	105	1 pc
CTHSP0045	108	1 pc
CTHSP0046	111	1 pc
CTHSP0047	114	1 pc
CTHSP0048	121	1 pc
CTHSP0049	127	1 pc
CTHSP0050	133	1 pc
CTHSP0051	140	1 pc
CTHSP0052	146	1 pc
CTHSP0053	152	1 pc

Bi-metal holesaw mandrels

HOLESAWS



CTHSP0054	Hex 3/8"	1/2"-20UNF	14,3 - 25,4	1 pc



CTHSP0055	Hex 3/8"	5/8"-18UNF	25,4 - 177,8	1 pc

Gear rim chucks (light duty)

DRILL CHUCKS

CTDCP0001		0,6-6,0	3/8-24 UNF	1 pc
CTDCP0002		1,5-10	3/8-24 UNF	1 pc
CTDCP0003		1,5-13	1/2-20 UNF	1 pc
CTDCP0004		3-16	1/2-20 UNF	1 pc

Gear rim chucks (med/heavy duty)

DRILL CHUCKS

CTDCP0008		1-10	3/8-24 UNF	1 pc
CTDCP0007		1-13	B16	1 pc
CTDCP0009		1-13	1/2-20 UNF	1 pc
CTDCP0010		3-16	1/2-20 UNF	1 pc

Keyless chuck (double sleeve)

DRILL CHUCKS

			
CTDCP0011		0,6-6	3/8-24 1 pc
CTDCP0012		0,8-10	3/8-24 1 pc
CTDCP0013		0,8-10	1/2-20 1 pc
CTDCP0023		2-13	3/8-24 1 pc
CTDCP0024		2-13	1/2-20 1 pc
CTDCP0014		1-10	3/8-24 1 pc

Keyless chuck (lock function)

DRILL CHUCKS

			
CTDCP0015		0,8-10	3/8-24 1 pc
CTDCP0016		2-13	1/2-20 1 pc
CTDCP0017		2-13	3/8-24 1 pc
CTDCP0018		2-13	1/2-20 1 pc
CTDCP0019		2-13	1/2-20 1 pc
CTDCP0020		2-13	1/2-20 1 pc

CHUCK KEY

DRILL CHUCKS

		
CTDCP0025		13 1 pc
CTDCP0026		16 1 pc

Universal diamond cutting discs

SEGMENTED DIAMOND RIM



			
CTDDP0037	110	22,2	1 pc
CTDDP0001	115	22,2	1 pc
CTDDP0002	125	22,2	1 pc
CTDDP0003	150	22,2	1 pc
CTDDP0004	180	22,2	1 pc
CTDDP0005	230	22,2	1 pc
CTDDP0043	105	16/20	1 pc

Universal diamond cutting discs

TURBO CONTINUOUS DIAMOND RIM



			
CTDDP0193	110	22,2	1 pc
CTDDP0006	115	22,2	1 pc
CTDDP0007	125	22,2	1 pc
CTDDP0008	150	22,2	1 pc
CTDDP0009	180	22,2	1 pc
CTDDP0170	200	22,2	1 pc
CTDDP0010	230	22,2	1 pc
CTDDP0201	350	22,2	1 pc

CONCRETE diamond cutting discs

TURBO T-TYPE SEGMENTED RIM



			
CTDDP0049	115	22,2	1 pc
CTDDP0050	125	22,2	1 pc
CTDDP0051	150	22,2	1 pc
CTDDP0052	180	22,2	1 pc
CTDDP0053	230	22,2	1 pc
CTDDP0048	105	16/20	1 pc

Diamond cutting discs for tiles

CONTINUOUS DIAMOND RIM



			
CTDDP0038	110	22,2	1 pc
CTDDP0011	115	22,2	1 pc

Diamond cutting disc

ELECTROPLATING DIAMOND SAW BLADE



			
CTDDP0233	180	22,2	1 pc
CTDDP0234	230	22,2	1 pc

Diamond discs for stone

SPLIT SEGMENTED DIAMOND RIM



			
CTDDP0020	115	22,2	1 pc
CTDDP0021	125	22,2	1 pc
CTDDP0022	150	22,2	1 pc
CTDDP0023	180	22,2	1 pc
CTDDP0024	230	22,2	1 pc
CTDDP0047	105	16/20	1 pc

Diamond cutting disc

ELECTROPLATING DIAMOND SAW BLADE



			
CTDDP0235	180	22,2	1 pc
CTDDP0236	200	22,2	1 pc

Diamond discs for stone

TURBO SPLIT SEGMENTED DIAMOND RIM



			
CTDDP0040	110	22,2	1 pc
CTDDP0025	115	22,2	1 pc
CTDDP0026	125	22,2	1 pc
CTDDP0027	150	22,2	1 pc
CTDDP0028	180	22,2	1 pc
CTDDP0029	230	22,2	1 pc

Diamond cutting disc

ELECTROPLATING DIAMOND SAW BLADE



			
CTDDP0237	230	22,2	1 pc

Brazed diamond discs for concrete

BRAZED, SILVER WELDED DIAMOND RIM



			
CTDDP0187	400	25,4	1 pc
CTDDP0198	450	25,4	1 pc
CTDDP0188	500	25,4	1 pc

Diamond cutting discs for tiles

TURBO CONTINUOUS DIAMOND RIM



			
CTDDP0039	110	22,2	1 pc
CTDDP0014	115	22,2	1 pc
CTDDP0015	125	22,2	1 pc
CTDDP0016	150	22,2	1 pc
CTDDP0195	150	25,4	1 pc
CTDDP0017	180	22,2	1 pc
CTDDP0196	180	25,4	1 pc
CTDDP0018	200	22,2	1 pc
CTDDP0175	300	50	1 pc
CTDDP0019	230	22,2	1 pc

Brazed diamond discs for ASPHALT

BRAZED, SILVER WELDED DIAMOND RIM



			
CTDDP0174	350	50	1 pc
CTDDP0171	400	50	1 pc
CTDDP0172	450	50	1 pc
CTDDP0173	500	50	1 pc

Brazed diamond discs for marble

BRAZED, SILVER WELDED DIAMOND RIM



	 mm	 mm	
CTDDP0054	300	50	1 pc
CTDDP0055	350	50	1 pc
CTDDP0056	400	50	1 pc
CTDDP0057	450	50	1 pc
CTDDP0058	500	50	1 pc
CTDDP0059	600	50	1 pc

Diamond cup wheels

SEGMENTED SINGLE ROW



	 mm	
CTDDP0157	105	1 pc
CTDDP0158	115	1 pc
CTDDP0159	125	1 pc
CTDDP0160	180	1 pc

Diamond cup wheels

SEGMENTED DOUBLE ROW



	 mm	
CTDDP0161	105	1 pc
CTDDP0162	115	1 pc
CTDDP0163	125	1 pc
CTDDP0164	180	1 pc

Diamond cup wheels

TURBO CONTINUOUS



	 mm	
CTDDP0165	105	1 pc
CTDDP0166	115	1 pc
CTDDP0167	125	1 pc
CTDDP0168	180	1 pc

Diamond cup wheels

ASLANT SEGMENTED



	 mm	
CTDDP0169	105	1 pc

Dry diamond core bits

DIAMOND CORE BITS (1-1/4"UNC)



	 mm	 mm	 n°	
CTDDP0122	32	330	3	1 pc
CTDDP0123	42	330	3	1 pc
CTDDP0124	52	330	4	1 pc
CTDDP0125	62	400	5	1 pc
CTDDP0126	68	400	6	1 pc
CTDDP0127	87	400	8	1 pc
CTDDP0128	102	400	10	1 pc
CTDDP0129	112	400	11	1 pc
CTDDP0130	122	400	12	1 pc
CTDDP0131	132	400	13	1 pc
CTDDP0132	142	400	14	1 pc
CTDDP0133	152	400	15	1 pc
CTDDP0134	157	400	15	1 pc

Dry diamond core bits

DIAMOND CORE BITS (SDS-DI)



	 mm	 mm	 n°	
CTDDP0135	32	330	3	1 pc
CTDDP0136	42	330	3	1 pc
CTDDP0137	52	330	4	1 pc
CTDDP0138	62	400	5	1 pc
CTDDP0139	68	400	6	1 pc
CTDDP0140	87	400	8	1 pc
CTDDP0141	102	400	10	1 pc
CTDDP0142	112	400	11	1 pc
CTDDP0143	122	400	12	1 pc
CTDDP0144	132	400	13	1 pc
CTDDP0145	142	400	14	1 pc
CTDDP0146	152	400	15	1 pc

Wet diamond core bits

DIAMOND CORE BITS (1-1/4"UNC)



	Ø mm	L mm	n°	
CTDDP0078	52	450	5	1 pc
CTDDP0079	57	450	5	1 pc
CTDDP0080	62	450	6	1 pc
CTDDP0081	72	450	7	1 pc
CTDDP0082	77	450	7	1 pc
CTDDP0083	82	450	8	1 pc
CTDDP0084	92	450	9	1 pc
CTDDP0085	102	450	10	1 pc
CTDDP0086	107	450	10	1 pc
CTDDP0087	112	450	11	1 pc
CTDDP0088	122	450	12	1 pc
CTDDP0089	127	450	12	1 pc
CTDDP0090	132	450	13	1 pc
CTDDP0091	152	450	15	1 pc
CTDDP0092	162	450	16	1 pc
CTDDP0093	172	450	17	1 pc
CTDDP0094	182	450	18	1 pc
CTDDP0095	202	450	20	1 pc
CTDDP0096	212	450	21	1 pc
CTDDP0097	225	450	22	1 pc
CTDDP0098	250	450	25	1 pc

CTDDP0115	60	440	6	1 pc
CTDDP0116	65	440	6	1 pc
CTDDP0117	72	440	7	1 pc
CTDDP0118	78	440	7	1 pc
CTDDP0119	82	440	8	1 pc
CTDDP0120	91	440	9	1 pc
CTDDP0121	102	440	10	1 pc

Dry diamond core bits

DIAMOND CORE BITS (M16)



	Ø mm	L mm	n°	
CTDDP0147	68	60	3	1 pc
CTDDP0148	82	60	4	1 pc
CTDDP0149	68	60	6	1 pc
CTDDP0150	82	60	8	1 pc

Wet diamond core bits

DIAMOND CORE BITS (SDS-DI)



	Ø mm	L mm	n°	
CTDDP0099	10	150	Ring	1 pc
CTDDP0100	12	150	Ring	1 pc
CTDDP0101	14	440	Ring	1 pc
CTDDP0102	16	440	Ring	1 pc
CTDDP0103	18	440	Ring	1 pc
CTDDP0104	20	440	Ring	1 pc
CTDDP0105	22	440	Ring	1 pc
CTDDP0106	24	440	Ring	1 pc
CTDDP0107	25	440	Ring	1 pc
CTDDP0108	28	440	Ring	1 pc
CTDDP0109	30	440	Ring	1 pc
CTDDP0110	32	440	Ring	1 pc
CTDDP0111	37	440	Ring	1 pc
CTDDP0112	40	440	Ring	1 pc
CTDDP0113	45	440	Ring	1 pc
CTDDP0114	52	440	5	1 pc

Wet diamond core bits

DIAMOND CORE BITS (1-2"UNC)



	Ø mm	L mm	n°	
CTDDP0062	12	300	Ring	1 pc
CTDDP0063	14	300	Ring	1 pc
CTDDP0064	16	300	Ring	1 pc
CTDDP0065	18	300	Ring	1 pc
CTDDP0066	20	300	Ring	1 pc
CTDDP0067	22	300	Ring	1 pc
CTDDP0068	24	300	Ring	1 pc
CTDDP0069	26	300	Ring	1 pc
CTDDP0070	28	300	Ring	1 pc
CTDDP0071	30	300	Ring	1 pc
CTDDP0072	32	300	Ring	1 pc
CTDDP0073	35	300	Ring	1 pc
CTDDP0074	37	400	Ring	1 pc
CTDDP0075	40	400	Ring	1 pc
CTDDP0076	42	400	Ring	1 pc
CTDDP0077	47	400	Ring	1 pc

Cutting and grinding discs for metal

ABRASIVE DISCS (CUT)



CTCDP0031	100	16	1	1 pc
CTCDP0034	100	16	1,5	1 pc
CTCDP0032	100	16	1,6	1 pc
CTCDP0030	100	16	2	1 pc
CTCDP0033	100	16	2,5	1 pc
CTCDP0028	100	16	3	1 pc
CTCDP0046	100	16	3,2	1 pc
CTCDP0001	115	22,2	1	1 pc
CTCDP0002	115	22,2	1,2	1 pc
CTCDP0003	115	22,2	1,6	1 pc
CTCDP0004	115	22,2	2,0	1 pc
CTCDP0038	115	22,2	2,5	1 pc
CTCDP0045	115	22,2	3	1 pc
CTCDP0047	115	22,2	3,2	1 pc
CTCDP0005	125	22,2	1	1 pc
CTCDP0006	125	22,2	1,2	1 pc
CTCDP0007	125	22,2	1,6	1 pc
CTCDP0008	125	22,2	2,0	1 pc
CTCDP0039	125	22,2	2,5	1 pc
CTCDP0048	125	22,2	3,2	1 pc
CTCDP0009	150	22,2	1,2	1 pc
CTCDP0010	150	22,2	1,6	1 pc
CTCDP0011	150	22,2	2,0	1 pc
CTCDP0040	150	22,2	2,5	1 pc
CTCDP0012	180	22,2	1,6	1 pc
CTCDP0059	180	22,2	2	1 pc
CTCDP0013	180	22,2	2,5	1 pc
CTCDP0035	180	22,2	3	1 pc
CTCDP0049	180	22,2	3,2	1 pc
CTCDP0014	230	22,2	2,0	1 pc
CTCDP0015	230	22,2	2,5	1 pc
CTCDP0050	230	22,2	3,2	1 pc
CTCDP0041	300	25,4	3	1 pc
CTCDP0042	300	32	3	1 pc
CTCDP0051	300	25,4	3,5	1 pc
CTCDP0027	350	25,4	3	1 pc
CTCDP0043	350	32	3	1 pc
CTCDP0052	350	25,4	3,5	1 pc
CTCDP0037	400	32	3	1 pc
CTCDP0036	400	25,4	3	1 pc
CTCDP0066	400	32	4	1 pc
CTCDP0041	300	25,4	3	1 pc
CTCDP0027	350	25,4	3	1 pc
CTCDP0043	350	32	3	1 pc
CTCDP0052	350	25,4	3	1 pc
CTCDP0042	300	32	3	1 pc
CTCDP0051	300	25,4	3	1 pc
CTCDP0037	400	32	3	1 pc
CTCDP0036	400	25,4	3	1 pc
CTCDP0066	400	32	4	1 pc

Cutting and grinding discs for metal

ABRASIVE DISCS (GRIND)



CTGDP0029	100	16	6	1 pc
CTGDP0016	115	22,2	6	1 pc
CTGDP0053	115	22,2	6,4	1 pc
CTGDP0017	125	22,2	6	1 pc
CTGDP0054	125	22,2	6,4	1 pc
CTGDP0018	150	22,2	6	1 pc
CTGDP0019	180	22,2	6	1 pc
CTGDP0055	180	22,2	6,4	1 pc
CTGDP0020	230	22,2	6	1 pc
CTGDP0060	230	22,2	6,4	1 pc

Cut, and grind, discs for STAINLESS Steel

ABRASIVE DISCS (CUT)



CTCDP0061	115	22,2	1,0	1 pc
CTCDP0056	115	22,2	1,2	1 pc
CTCDP0057	125	22,2	1,6	1 pc
CTCDP0068	230	22,2	1,9	1 pc
CTCDP0069	115	22,2	3,0	1 pc
CTCDP0070	125	22,2	3,0	1 pc
CTCDP0071	180	22,2	3,0	1 pc
CTCDP0072	230	22,2	3,0	1 pc
CTCDP0058	230	22,2	2,5	1 pc
CTCDP0062	125	22,2	1,2	1 pc
CTCDP0063	180	22,2	1,2	1 pc

Cut, and grind, discs for STAINLESS Steel

ABRASIVE DISCS (GRIND)



CTGDP0064	115	22,2	6	1 pc
CTGDP0065	125	22,2	6	1 pc

Cutting discs for STONE

ABRASIVE DISCS (CUT)



CTCDP0021	115	16	2,5	1 pc
CTCDP0073	115	22,2	3	1 pc
CTCDP0022	125	22,2	2,5	1 pc
CTCDP0067	125	22,2	3	1 pc
CTCDP0023	150	22,2	2,5	1 pc
CTCDP0024	180	22,2	3	1 pc
CTCDP0044	230	22,2	2,5	1 pc
CTCDP0025	230	22,2	3	1 pc

Grinding discs for Metal

ABRASIVE DISCS (GRIND)



CADG-MG6022115	115	6	22,23	1 pc
CADG-MG6422115	115	6,4	22,23	1 pc
CADG-MG6022125	125	6	22,23	1 pc
CADG-MG6422125	125	6,4	22,23	1 pc
CADG-MG6022150	150	6	22,23	1 pc
CADG-MG6022180	180	6	22,23	1 pc
CADG-MG6422180	180	6,4	22,23	1 pc
CADG-MG6022230	230	6	22,23	1 pc

Grinding discs for Stainless steel

ABRASIVE DISCS (GRIND)



CADG-SG6422125	125	6,4	22,23	1 pc

Cutting discs for Metal

ABRASIVE DISCS (CUT)



CADG-MC2522115	115	2,5	22,23	1 pc
CADG-MC3022115	115	3,0	22,23	1 pc
CADG-MC3222115	115	3,2	22,23	1 pc
CADG-MC2522125	125	2,5	22,23	1 pc
CADG-MC3022125	125	3,0	22,23	1 pc
CADG-MC3222125	125	3,2	22,23	1 pc
CADG-MC2522150	150	2,5	22,23	1 pc
CADG-MC3022150	150	3,0	22,23	1 pc
CADG-MC2522180	180	2,5	22,23	1 pc
CADG-MC3022180	180	3,0	22,23	1 pc
CADG-MC2522230	230	2,5	22,23	1 pc
CADG-MC3022230	230	3,0	22,23	1 pc
CADG-MC3222230	230	3,2	22,23	1 pc
CADG-MC3025300	300	3,0	25,4	1 pc
CADG-MC3525300	300	3,5	25,4	1 pc
CADG-MC3025355	355	3,0	25,4	1 pc
CADG-MC3525350	355	3,5	25,4	1 pc
CADG-MC3025400	400	3,0	25,4	1 pc

Cutting discs for STONE

ABRASIVE DISCS (CUT)



CADG-RC3022115	115	3,0	22,23	1 pc
CADG-RC3222115	115	3,2	22,23	1 pc
CADG-RC3022125	125	3,0	22,23	1 pc
CADG-RC3222125	125	3,2	22,23	1 pc
CADG-RC3022150	150	3,0	22,23	1 pc
CADG-RC3022180	180	3,0	22,23	1 pc
CADG-RC3022230	230	3,0	22,23	1 pc
CADG-RC3222230	230	3,2	22,23	1 pc

Aluminium oxide abrasive flap discs

STRAIGHT SHAPE, PAPER BACKING PLATE



CTFWP0050	100	16	40	1 pc
CTFWP0051	100	16	60	1 pc
CTFWP0052	100	16	80	1 pc
CTFWP0053	100	16	120	1 pc

Aluminium oxide abrasive flap discs

STRAIGHT SHAPE, PLASTIC BACKING PLATE



CTFWP0054	100	16	40	1 pc
CTFWP0055	100	16	60	1 pc
CTFWP0056	100	16	80	1 pc
CTFWP0057	100	16	120	1 pc

Aluminium oxide abrasive flap discs

BOMB-SHAPED, PLASTIC BACKING PLATE



CTFWP0046	100	16	40#	1 pc
CTFWP0047	100	16	60#	1 pc
CTFWP0048	100	16	80#	1 pc
CTFWP0049	100	16	120#	1 pc

Aluminium oxide abrasive flap discs

STRAIGHT SHAPE, RESIN FIBERGLASS BACKING PLATE



CTFWP0001	100	16	40	1 pc
CTFWP0002	100	16	60	1 pc
CTFWP0003	100	16	80	1 pc
CTFWP0004	100	16	120	1 pc
CTFWP0115	115	22,2	40	1 pc
CTFWP0005	115	22,2	60	1 pc
CTFWP0006	115	22,2	80	1 pc
CTFWP0007	115	22,2	120	1 pc
CTFWP0008	125	22,2	40	1 pc
CTFWP0009	125	22,2	60	1 pc
CTFWP0010	125	22,2	80	1 pc
CTFWP0011	125	22,2	100	1 pc
CTFWP0012	125	22,2	120	1 pc
CTFWP0013	150	22,2	40	1 pc
CTFWP0014	150	22,2	60	1 pc
CTFWP0015	150	22,2	80	1 pc
CTFWP0016	150	22,2	120	1 pc
CTFWP0017	180	22,2	40	1 pc
CTFWP0018	180	22,2	60	1 pc
CTFWP0019	180	22,2	80	1 pc
CTFWP0020	180	22,2	120	1 pc
CTFWP0021	100	16	320	1 pc

Zirconia alumina abrasive flap discs

STRAIGHT SHAPE, RESIN FIBERGLASS BACKING PLATE



CTFWP0026	100	16	40	1 pc
CTFWP0027	100	16	60	1 pc
CTFWP0028	100	16	80	1 pc
CTFWP0029	100	16	120	1 pc
CTFWP0030	115	22,2	40	1 pc
CTFWP0031	115	22,2	60	1 pc
CTFWP0032	115	22,2	80	1 pc
CTFWP0033	115	22,2	120	1 pc
CTFWP0034	125	22,2	40	1 pc
CTFWP0035	125	22,2	60	1 pc
CTFWP0036	125	22,2	80	1 pc
CTFWP0114	125	22,2	100	1 pc
CTFWP0037	125	22,2	120	1 pc
CTFWP0038	150	22,2	40	1 pc
CTFWP0039	150	22,2	60	1 pc
CTFWP0040	150	22,2	80	1 pc
CTFWP0041	150	22,2	120	1 pc
CTFWP0042	180	22,2	40	1 pc
CTFWP0043	180	22,2	60	1 pc
CTFWP0044	180	22,2	80	1 pc
CTFWP0045	180	22,2	120	1 pc

Aluminium oxide abrasive flap discs

BOMB-SHAPED, PLASTIC BACKING PLATE



CTFWP0022	100	16	40	1 pc
CTFWP0023	100	16	40	1 pc
CTFWP0024	100	16	80	1 pc
CTFWP0025	100	16	120	1 pc

Aluminium oxide flap WHEELS

FLAP WHEELS



CTFWP0058	20	25	6	40	2 pcs
CTFWP0059	20	25	6	60	2 pcs
CTFWP0060	20	25	6	80	2 pcs
CTFWP0061	20	25	6	120	2 pcs
CTFWP0062	25	25	6	40	2 pcs
CTFWP0063	25	25	6	60	2 pcs
CTFWP0064	25	25	6	80	2 pcs
CTFWP0065	25	25	6	120	2 pcs

CTFWP0066	30	25	6	40	2 pcs
CTFWP0067	30	25	6	60	2 pcs
CTFWP0068	30	25	6	80	2 pcs
CTFWP0069	30	25	6	120	2 pcs
CTFWP0070	40	25	6	40	2 pcs
CTFWP0071	40	25	6	60	2 pcs
CTFWP0072	40	25	6	80	2 pcs
CTFWP0073	40	25	6	120	2 pcs
CTFWP0074	50	25	6	40	1 pc
CTFWP0075	50	25	6	60	1 pc
CTFWP0076	50	25	6	80	1 pc
CTFWP0077	50	25	6	120	1 pc
CTFWP0078	60	25	6	40	1 pc
CTFWP0079	60	25	6	60	1 pc
CTFWP0080	60	25	6	80	1 pc
CTFWP0081	60	25	6	120	1 pc
CTFWP0082	80	25	6	40	1 pc
CTFWP0083	80	25	6	60	1 pc
CTFWP0084	80	25	6	80	1 pc
CTFWP0085	80	25	6	120	1 pc
CTFWP0086	20	25	6	40	2 pcs
CTFWP0087	20	25	6	60	2 pcs
CTFWP0088	20	25	6	80	2 pcs
CTFWP0089	20	25	6	120	2 pcs
CTFWP0090	25	25	6	40	2 pcs
CTFWP0091	25	25	6	60	2 pcs
CTFWP0092	25	25	6	80	2 pcs
CTFWP0093	25	25	6	120	2 pcs
CTFWP0094	30	25	6	40	2 pcs
CTFWP0095	30	25	6	60	2 pcs
CTFWP0096	30	25	6	80	2 pcs
CTFWP0097	30	25	6	120	2 pcs
CTFWP0098	40	25	6	40	2 pcs
CTFWP0099	40	25	6	60	2 pcs
CTFWP0100	40	25	6	80	2 pcs
CTFWP0101	40	25	6	120	2 pcs
CTFWP0102	50	25	6	40	1 pc
CTFWP0103	50	25	6	60	1 pc
CTFWP0104	50	25	6	80	1 pc
CTFWP0105	50	25	6	120	1 pc
CTFWP0106	60	25	6	40	1 pc
CTFWP0107	60	25	6	60	1 pc
CTFWP0108	60	25	6	80	1 pc
CTFWP0109	60	25	6	120	1 pc
CTFWP0110	80	25	6	40	1 pc
CTFWP0111	80	25	6	60	1 pc
CTFWP0112	80	25	6	80	1 pc
CTFWP0113	80	25	6	120	1 pc

Sanding paper for orbital sanders

SANDING PAPER



	W mm	L mm		
CTSP0001	115	140	40	10 pcs
CTSP0002	115	140	60	10 pcs
CTSP0003	115	140	80	10 pcs
CTSP0004	115	140	120	10 pcs
CTSP0005	115	140	180	10 pcs
CTSP0006	115	140	240	10 pcs
CTSP0007	115	140	320	10 pcs
CTSP0008	93	230	40	10 pcs
CTSP0009	93	230	60	10 pcs
CTSP0010	93	230	80	10 pcs
CTSP0011	93	230	120	10 pcs
CTSP0012	93	230	180	10 pcs
CTSP0013	93	230	240	10 pcs
CTSP0014	93	230	320	10 pcs
CTSP0015	115	280	40	10 pcs

CTSP0016	115	280	60	10 pcs
CTSP0017	115	280	80	10 pcs
CTSP0018	115	280	120	10 pcs
CTSP0019	115	280	180	10 pcs
CTSP0020	115	280	240	10 pcs
CTSP0021	115	280	320	10 pcs

Sanding belts

SANDING PAPER



	Ø mm		
CTSP0068	115	40	6pc
CTSP0069	115	60	6pc
CTSP0070	115	80	6pc
CTSP0071	115	100	6pc
CTSP0072	115	120	6pc
CTSP0073	125	40	6pc
CTSP0074	125	60	6pc
CTSP0075	125	80	6pc
CTSP0076	125	100	6pc
CTSP0077	125	120	6pc
CTSP0078	125	180	6pc
CTSP0079	125	240	6pc
CTSP0080	125	320	6pc
CTSP0081	125	400	6pc
CTSP0082	125	600	6pc
CTSP0083	125	1200	6pc

Sanding belts

SANDING PAPER



	L mm	W mm		
CTSP0038	457	75	40	6 pcs
CTSP0039	457	75	60	6 pcs
CTSP0040	457	75	80	6 pcs
CTSP0041	457	75	100	6 pcs
CTSP0042	457	75	150	6 pcs
CTSP0043	457	75	180	6 pcs
CTSP0044	457	75	220	6 pcs
CTSP0045	457	75	280	6 pcs
CTSP0046	457	75	320	6 pcs
CTSP0047	533	75	40	6 pcs
CTSP0048	533	75	60	6 pcs
CTSP0049	533	75	80	6 pcs
CTSP0050	533	75	100	6 pcs
CTSP0051	533	75	150	6 pcs
CTSP0052	533	75	180	6 pcs
CTSP0053	533	75	220	6 pcs
CTSP0054	533	75	280	6 pcs
CTSP0055	533	75	320	6 pcs
CTSP0064	610	100	60	6 pcs
CTSP0065	610	100	80	6 pcs
CTSP0066	610	100	120	6 pcs
CTSP0067	610	100	180	6 pcs

Sanding belts for plasterboard

SANDING PAPER



	L mm	W mm		
CTSP0056	457	75	60	6 pcs
CTSP0057	457	75	80	6 pcs
CTSP0058	457	75	120	6 pcs
CTSP0059	457	75	180	6 pcs
CTSP0060	533	75	60	6 pcs
CTSP0061	533	75	80	6 pcs
CTSP0062	533	75	120	6 pcs
CTSP0063	533	75	180	6 pcs

Pencil burshes for drills

WIRE BRUSHES (CRIMPED)

					
CTWBP0001		6	24	0,3	1 pc
CTWBP0002		6	28	0,3	1 pc

CUP burshes for drills

WIRE BRUSHES (CRIMPED)

					
CTWBP0003		6	50	0,3	1 pc
CTWBP0004		6	63	0,3	1 pc
CTWBP0005		6	70	0,3	1 pc
CTWBP0006		6	75	0,3	1 pc

CUP burshes for drills

WIRE BRUSHES (KNOTTED)

					
CTWBP0007		6	65	0,5	1 pc
CTWBP0008		6	75	0,5	1 pc

Wheel brushes for drills

WIRE BRUSHES (CRIMPED)

					
CTWBP0009		6	38	0,3	1 pc
CTWBP0010		6	50	0,3	1 pc
CTWBP0011		6	63	0,3	1 pc
CTWBP0012		6	75	0,3	1 pc
CTWBP0013		6	100	0,3	1 pc

Wheel brushes for drills

WIRE BRUSHES (KNOTTED)

									
CTWBP0014			6	75	0,5	1 pc			
CTWBP0015			6	85	0,5	1 pc			

Cup burshes for grinders


WIRE BRUSHES (CRIMPED)

					
CTWBP0016		M14	65	0,35	1 pc
CTWBP0017		M14	70	0,35	1 pc
CTWBP0018		M14	75	0,35	1 pc
CTWBP0019		M14	100	0,35	1 pc
CTWBP0020		M14	125	0,35	1 pc

Cup burshes for grinders

WIRE BRUSHES (KNOTTED)

					
CTWBP0021		M14	65	0,5	1 pc
CTWBP0022		M14	75	0,5	1 pc
CTWBP0023		M14	85	0,5	1 pc
CTWBP0024		M14	90	0,5	1 pc
CTWBP0025		M14	100	0,5	1 pc
CTWBP0026		M14	125	0,5	1 pc

CTWBP0027		M14	65	0,5	1 pc
CTWBP0028		M14	80	0,5	1 pc
CTWBP0029		M14	100	0,5	1 pc
CTWBP0030		M14	125	0,5	1 pc

Tapered burshes for grinders

WIRE BRUSHES (CRIMPED)

		 mm			
CTWBP0031		M14	100	0,3	1 pc
CTWBP0032		M14	115	0,3	1 pc
CTWBP0033		M14	125	0,3	1 pc

Tapered burshes for grinders

WIRE BRUSHES (KNOTTED)

 Ø mm  					
CTWBP0034		M14	100	0,5	1 pc
CTWBP0035		M14	115	0,5	1 pc
CTWBP0036		M14	125	0,5	1 pc

Wheel brushes for grinders

WIRE BRUSHES (KNOTTED)

				
CTWBP0037	7/8" arbor	100	0,5	1 pc
CTWBP0038	7/8" arbor	115	0,5	1 pc
CTWBP0039	7/8" arbor	125	0,5	1 pc
CTWBP0040	7/8" arbor	150	0,5	1 pc
CTWBP0041	7/8" arbor	175	0,5	1 pc

Lambswool polishing discs

POLISHING DISCS + LACE UP



		
CTPDP0001	125	1 pc
CTPDP0009	150	1 pc
CTPDP0002	180	1 pc

Lambswool polishing discs

POLISHING DISCS



		
CTPDP0003	125	1 pc
CTPDP0010	150	1 pc
CTPDP0004	180	1 pc

Polishing backing pads

POLISHING DISCS (SPONGE PAD)



		
CTPDP0011	80	1 pc
CTPDP0012	100	1 pc
CTPDP0013	115	1 pc
CTPDP0005	125	1 pc
CTPDP0014	150	1 pc
CTPDP0006	180	1 pc



		
CTPDP0015	100	1 pc
CTPDP0016	115	1 pc
CTPDP0017	125	1 pc
CTPDP0018	150	1 pc
CTPDP0019	180	1 pc

TCT saw blades for wood

CIRCULAR SAW BLADES (FAST CUT)



					
CTTSP0047	115	20	2,0	24	1 pc
CTTSP0001	130	16	1,5	24	1 pc
CTTSP0002	140	16	1,5	20	1 pc
CTTSP0003	160	20/16	2,0	24	1 pc
CTTSP0004	185	20	2,2	20	1 pc
CTTSP0029	185	20/16	2,2	24	1 pc
CTTSP0031	190	16	2,2	24	1 pc
CTTSP0006	190	30/25,4/20	2,2	24	1 pc
CTTSP0007	210	30/25,4/20	2,2	24	1 pc
CTTSP0008	230	30/25,4/20	2,6	30	1 pc
CTTSP0017	250	30/25,4/20	2,6	24	1 pc
CTTSP0018	250	30/25,4/20	2,6	40	1 pc
CTTSP0020	300	30/25,4/20	3,0	48	1 pc
CTTSP0034	300	30/25,4/20	3,0	60	1 pc
CTTSP0001A	100	20	16	40	1 pc
CTTSP0002A	105	20	16	30	1 pc
CTTSP0003A	160	25,4	20/19/16	40	1 pc
CTTSP0007A	180	25,4	20/19/16	60	1 pc
CTTSP0004A	184	25,4	20/19/16	40	1 pc
CTTSP0008A	230	30	25,4/25	60	1 pc
CTTSP0005A	235	30	25,4/25	40	1 pc
CTTSP0006A	254	25,4	20/16	60	1 pc
CTTSP0009A	254	25,4	20/16	80	1 pc
CTTSP0010A	305	30	20/25	100	1 pc

TCT saw blades for wood

CIRCULAR SAW BLADES (CLEAR CUT)



					
CTTSP0026	110	20	2,0	40	1 pc
CTTSP0045	115	20	2,0	40	1 pc
CTTSP0009	130	16	1,5	48	1 pc
CTTSP0010	140	16	1,5	48	1 pc
CTTSP0011	160	20/16	2,0	32	1 pc

TCT saw blades for wood

CIRCULAR SAW BLADES (CLEAR CUT)



					
CTTSP0012	185	20/16	2,2	40	1 pc
CTTSP0043	185	20/16	2,2	80	1 pc
CTTSP0048	185	20/16	1,5	60	1 pc
CTTSP0013	190	16	2,2	48	1 pc
CTTSP0014	190	30/25,4/20	2,2	48	1 pc
CTTSP0015	210	30/25,4/20	2,2	48	1 pc
CTTSP0016	230	30/25,4/20	2,6	50	1 pc
CTTSP0049	235	30/25,4/20	2,6	50	1 pc
CTTSP0050	235	30/25,4/20	2,6	60	1 pc
CTTSP0051	235	30/25,4/20	2,6	80	1 pc
CTTSP0046	250	16	1,8	100	1 pc
CTTSP0019	250	30/25,4/20	2,6	60	1 pc
CTTSP0021	300	30/25,4/20	3,0	72	1 pc

TCT saw blades for laminated panels

CIRCULAR SAW BLADES (CLEAR CUT)

					
CTTSP0011A	235	25,4	20/19/16	60	1 pc

TCT saw blades for metal

CIRCULAR SAW BLADES



					
CTTSP0022	160	20/16	2,2	60	1 pc
CTTSP0035	185	16	2,2	60	1 pc
CTTSP0023	185	20	2,2	60	1 pc
CTTSP0036	190	16	2,2	60	1 pc
CTTSP0024	190	30/25,4/20	2,2	60	1 pc

TCT saw blades for aluminium/PVC

CIRCULAR SAW BLADES



					
CTTSP0038	140	20	1,8	40	1 pc
CTTSP0039	165	20	2,0	48	1 pc
CTTSP0040	190	20	2,0	48	1 pc
CTTSP0041	210	30/25,4/20	2,0	56	1 pc
CTTSP0025	210	30/25,4/20	2,0	80	1 pc
CTTSP0042	235	30/25,4/20	2,2	80	1 pc
CTTSP0044	255	30/25,4/20	3,0	80	1 pc
CTTSP0037	300	30/25,4/20	3,0	120	1 pc

					
CTTSP0039	165	20	2,0	48	1 pc
CTTSP0040	190	20	2,0	48	1 pc
CTTSP0041	210	30/25,4/20	2,0	56	1 pc
CTTSP0025	210	30/25,4/20	2,0	80	1 pc
CTTSP0042	235	30/25,4/20	2,2	80	1 pc
CTTSP0044	255	30/25,4/20	3,0	80	1 pc
CTTSP0037	300	30/25,4/20	3,0	120	1 pc

TCT saw blades for multi-material

CIRCULAR SAW BLADES



					
CTTSP0012A	110	20	16	40	1 pc
CTTSP0013A	254	25,4	20/16	120	1 pc
CTTSP0014A	305	30	20/25	120	1 pc
CTTSP0015A	355	30	20/25	120	1 pc

TCT saw blade for aluminum plastic board

CIRCULAR SAW BLADES



					
CTTSP0060	100 (V90°)	20	8	6	1 pc
CTTSP0061	100 (V90°)	20	8	8	1 pc
CTTSP0062	100 (V90°)	20	8	12	1 pc
CTTSP0063	118 (V90°)	20	8	6	1 pc
CTTSP0064	118 (V90°)	20	8	8	1 pc
CTTSP0065	118 (V90°)	20	8	12	1 pc

Jig saw blades for wood

JIG SAW BLADES



					
CT119B	76	51	2,0	-	5 pcs
CT119BO	76	51	2,0	+	5 pcs
CT101AO	76	50	1,27	+	5 pcs
CT101BR	100	75	2,5	-	5 pcs
CT101B	100	75	2,5	-	5 pcs
CT111C	100	75	3,0	-	5 pcs
CT101D	100	75	4,0	-	5 pcs
CT144D	100	75	4,0	-	5 pcs
CT244D	100	75	4,0	+	5 pcs
CT301CD	115	90	3,0	-	5 pcs
CT344D	115	126	4,0	-	5 pcs

Jig saw blades for METAL

JIG SAW BLADES



	L mm				
CT118A	76	51	1,2	-	5 pcs
CT118B	76	51	2,0	-	5 pcs
CT218A	76	51	1,2	+	5 pcs
CT118AF	85	57	1,2	-	5 pcs
CT127D	100	75	3,0	-	5 pcs
CT227D	100	75	3,0	+	5 pcs
CTJSP0015	100	75	8,0	-	5 pcs
CT318AF	130	105	1,2	-	5 pcs
CT318BF	130	105	2,0	-	5 pcs

Sabre saw blades for wood

SABRE SAW BLADES



	L mm				
CTSSP0007	120	100	2	-	5 pcs
CTSSP0003	150	130	4	-	5 pcs
CTSSP0004	210	188	3	-	5 pcs
CTSSP0005	231	210	4,23	-	3 pcs
CTSSP0006	231	210	2	-	3 pcs

Sabre saw blades for METAL


SABRE SAW BLADES



	L mm				
CTSSP0001	150	128	1	+	5 pcs
CTSSP0002	228	206	1	+	5 pcs
CTSSP0010	304	280	1,2	+	5 pcs

Supports for angle grinders

POWER TOOLS ACCESSORIES

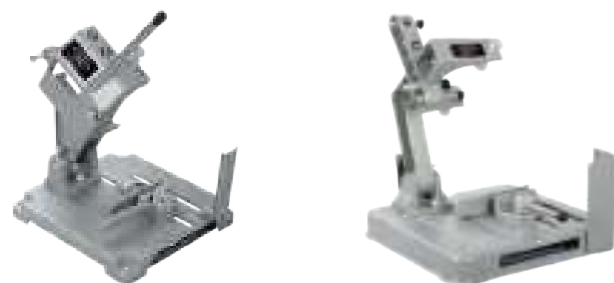

	Ø mm	
CTSTP0003	115	1 pc
CTSTP0005	118-230	1 pc

Supports for drills

POWER TOOLS ACCESSORIES



	H mm		Ø mm	
CTSTP0008	500	60	43	1 pc
CTSTP0011	500	60	43	1 pc

Electrode holders

WELDING MACHINES ACCESSORIES



	Amps	
CTEHP0001	300	1 pc
CTEHP0002	400	1 pc
CTEHP0003	500	1 pc
CTEHP0004	600	1 pc

HAND TOOLS



Hand tool household set(blow box)

CPHTS-BXA14

•Wide function coverage: simultaneously meet the requirements of tightening, cutting, measuring, knocking, clamping button



Adjustable wrench 8"	Slotted screwdriver 6X100 mm
Combination plier 6"	Phillips screwdriver PH2X100 mm
Steel measuring tape 3 m×16mm	Electrical adhesive tape 10 M
Claw hammer 8 OZ	Snap-off knives 18 mm
precision screwdriver set 6 pcs	

CPHTS-BXA20

•Wide function coverage: simultaneously meet the requirements of tightening, cutting, measuring, knocking, clamping button



Combination plier 6"	Claw hammer 8 OZ
Long-nose plier 6"	Hex key set 9 pcs
Steel measuring tape 3 m×16 mm	Mini hacksaw frame 6"
Digital test pencil 12-250 V	Scissors 210mm
Adjustable wrench 8"	Snap-off knives 18mm
Dual function Screwdriver & pole 6,35X100mm, SL5×PH1, SL6×PH2	

Hand tool household set(blow box)

CPHTS-BXA126

•Wide function coverage: simultaneously meet the requirements of tightening, cutting, measuring, knocking, clamping button



Claw hammer 8OZ	Combination plier6"
Long-nose plier6"	Digital test pencil 12-250V
Adjustable wrench 8"	Steel measuring tape 3m×16mm
Hex key set 9pcs	1/4"Hex sockets 5,6,8,9,10,11mm
Spirit level 230mm	Scissors210mm
precision screwdriver set 6pcs	Slotted screwdriver 5X100mm
Phillips screwdriver PH1X100mm	Bit screwdriver 1/4"
Socket adaptor 1/4"	Snap-off knives 18mm
Snap-off knife blades	
Screw specifications: 10 Pcs 4×30 Screw 10 Pcs 5×50 Screw 14 Pcs 4×18 self-tapping screw 10 Pcs 4×35 self-tapping screw 16 Pcs 4,8×25Hex Self drilling screw	
Screwdriver bits: SL3,SL4,SL5,SL6,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3,T10,T15,T20,T30,H3,H4,H5,H6	

Hand tool household set(Injection molding box)

CPHTS-IXA14

•Wide function coverage: simultaneously meet the requirements of tightening, knocking, clamping button



Combination plier 6"	Claw hammer 8 OZ
Adjustable wrench 8"	Bit screwdriver 1/4"
Screwdriver bits: SL3,SL4,SL5,SL6,PH1,PH2,PH3,PZ1,PZ2,PZ3	

Hand tool household set(Injection molding box)

CPHTS-IXA25

•Wide function coverage: simultaneously meet the requirements of tightening, knocking, clamping button



Steel measuring tape 3 m x16 mm	Adjustable wrench 8"
Diagonal plier 6"	Bit screwdriver 1/4"
Combination plier 7"	
Screwdriver bits: SL3,SL4,SL5,SL6,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3,T10,T15,T20,T30,H3,H4,H5,H6	

Hand tool household set(canvas bag)

CPHTS-TXA10

•Wide function coverage: simultaneously meet the requirements of tightening, knocking, clamping button



Adjustable wrench 8"	Dual function Screwdriver
Combination plier 7"	6.35 x 100mm / SL6 x PH2
Long-nose plier 6"	Steel measuring tape 3 m x16 mm
Digital test pencil 12-250 V	Claw hammer 8 OZ
Dual function Screwdriver	Snap-off knives 18 mm
6.35 X 100 mm / SL5 x PH1	Electrical adhesive tape 10 m

Hand tool household set(canvas bag)

CPHTS-TXA15

•Wide function coverage: simultaneously meet the requirements of tightening, knocking, clamping button



Combination plier 6"	Claw hammer 8 OZ
Adjustable wrench 8"	Bit screwdriver 1/4"
Screwdriver bits: SL3,SL4,SL5,SL6,PH1,PH2,PH3,PZ1,PZ2,PZ3	

CPHTS-TXB15

•Wide function coverage: simultaneously meet the requirements of tightening, knocking, clamping button



Combination plier 6"	Dual function Screwdriver
Plastic case steel measuring tape 3m x16mm	6.35X100mm / SL6 x PH2
Claw hammer 8OZ	Scissors 210mm
Utility knife 18mm	Hexagon 1,5 2 2,5 3 4 5
Dual function Screwdriver	5,5 6 mm
6.35X100mm / SL5 x PH1	

Combination pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-COA06	160 / 6"	1,6	6 / 60
CPHPL-COA07	180 / 7"	1,8	6 / 60
CPHPL-COA08	200 / 8"	2,0	6 / 48

High leverage combination pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-COB08	200 / 8"	2,0	6 / 48

Diagonal cutting pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-DCA06	160 / 6"	1,6	6 / 60
CPHPL-DCA07	180 / 7"	1,6	6 / 60

High leverage diagonal cutting pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-DCB06	160 / 6"	1,6	6 / 60

Long nose pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-LNA06	160 / 6"	1,6	6 / 60
CPHPL-LNA08	200 / 8"	1,6	6 / 60

High leverage long nose pliers

- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	L mm / inch	Cutting ability mm	/ pcs
CPHPL-LNB06	160 / 6"	1,6	6 / 60

Wire stripper

- Black polished
- Bi-material handle



Product code	L mm / inch	Wire size Ø mm²	/ pcs
CPHEP-WSA06	160 / 6"	5/10	6 / 60

High leverage pliers set


- Black polished
- Bi-material handle
- Cutting edge high-frequency treated



Product code	Contents	/ pcs
CPHPL-XB3	- 1 pc combination plier 200 mm - 1 pc diagonal cutting plier 160 mm - 1 pc long nose plier 160 mm	6 / 18

Internal circlip plier (straight nose)


Black polished



Product code	L mm / inch	Head Ø mm	mm	/ pcs
CPHPL-ISA07	180 / 7"	1,7	19-60	6 / 60

Circlip pliers set


Black polished

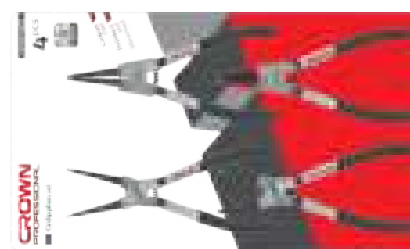

Product code	Contents	/ pcs
CPHPL-CPXA4	- 1 pc external circlip plier (straight) 180mm/7" - 1 pc external circlip plier (bent) 180mm/7" - 1 pc internal circlip plier (straight) 180mm/7" - 1 pc internal circlip plier (bent) 180mm/7"	6 / 24

External circlip plier (straight nose)


Black polished



Product code	L mm / inch	Head Ø mm	mm	/ pcs
CPHPL-ESA07	180 / 7"	1,7	19-60	6 / 60

Compound leverage shears (left cut)


Sandblasted surface
Bi-material handle



Product code	L mm / inch	Type	/ pcs
CPHSS-CLA10	250 / 10"	Left cut	6 / 48

Internal circlip plier (bent nose)


Black polished



Product code	L mm / inch	Head Ø mm	mm	/ pcs
CPHPL-IBA07	180 / 7"	1,7	19-60	6 / 60

Compound leverage shears (right cut)


Sandblasted surface
Bi-material handle



Product code	L mm / inch	Type	/ pcs
CPHSS-CRA10	250 / 10"	Right cut	6 / 48

External circlip plier (bent nose)

Black polished



Product code	L mm / inch	Head Ø mm	mm	/ pcs
CPHPL-EBA07	180 / 7"	1,7	19-60	6 / 60

Compound leverage shears (straight cut)

Sandblasted surface
Bi-material handle



Product code	L mm / inch	Type	/ pcs
CPHSS-CSA10	250 / 10"	Straight cut	6 / 48
CPHSS-CSA11	290 / 11,5"	Straight cut	6 / 36

Locking grip plier (curved jaws)

Comfort grip



Product code	L mm / inch	pcs
CPHPL-GRB05	130 / 5"	6 / 72
CPHPL-GRB07	180 / 7"	6 / 48
CPHPL-GRB10	250 / 10"	6 / 36

Comfort grip



Product code	L mm / inch	pcs
CPHPL-GRA05	130 / 5"	6 / 72
CPHPL-GRA07	180 / 7"	6 / 48
CPHPL-GRA10	250 / 10"	6 / 36

Locking grip plier (straight jaws)

Comfort grip



Product code	L mm / inch	pcs
CPHPL-GSB07	180 / 7"	6 / 48
CPHPL-GSB10	250 / 10"	6 / 36

Comfort grip



Product code	L mm / inch	pcs
CPHPL-GSA07	180 / 7"	6 / 48
CPHPL-GSA10	250 / 10"	6 / 36

Locking grip pliers (long jaws)

Comfort grip



Product code	L mm / inch	pcs
CPHPL-GLAH6	170 / 6,5"	6 / 48
CPHPL-GLAH9	230 / 9,5"	6 / 36



Product code	L mm / inch	pcs
CPHPL-GLBH6	170 / 6,5"	6 / 48
CPHPL-GLBH9	230 / 9,5"	6 / 36


Hand riveter

Spring assisted
Comfort grip



Product code	L mm / inch	Nozzles Ø mm	pcs
CPHPL-RTA10	260 / 10,5"	2,4 / 3,2 / 4 / 4,8	6 / 36


Induction hardened
Comfort grip



Product code	L mm / inch	Nozzles Ø mm	pcs
CPHPL-RTB08	200 / 8"	2,4 / 3,2 / 4 / 4,8	6 / 36

Heavy duty hand riveter

Induction hardened
Comfort grip



Product code	L mm / inch	Nozzles Ø mm	pcs
CPHPL-RHA12	300 / 12"	3,2 / 4 / 4,8	1 / 20

Slotted screwdrivers

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Size mm	pcs
CPHDS-AS0307	3x75	12 / 240
CPHDS-AS0507	5x75	12 / 240
CPHDS-AS0510	5x100	12 / 240
CPHDS-AS0512	5x125	12 / 240
CPHDS-AS0515	5x150	12 / 240
CPHDS-AS0603	6x38	12 / 240
CPHDS-AS0610	6x100	12 / 120
CPHDS-AS0612	6x125	12 / 120
CPHDS-AS0615	6x150	12 / 120
CPHDS-AS0620	6x200	12 / 120
CPHDS-AS0815	8x150	12 / 96
CPHDS-AS0820	8x200	12 / 96

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Size mm	pcs
CPHDS-APH007	PH0x75	12 / 240
CPHDS-APH107	PH1x75	12 / 240
CPHDS-APH110	PH1x100	12 / 240
CPHDS-APH112	PH1x125	12 / 240
CPHDS-APH115	PH1x150	12 / 240
CPHDS-APH203	PH2x38	12 / 240
CPHDS-APH210	PH2x100	12 / 120
CPHDS-APH212	PH2x125	12 / 120
CPHDS-APH215	PH2x150	12 / 120
CPHDS-APH220	PH2x200	12 / 120
CPHDS-APH315	PH3x150	12 / 96
CPHDS-APH320	PH3x200	12 / 96

Nut spinners

- Chrome plated blade
- Bi-material handle



Product code	Size mm	pcs
CPHDS-AN0407	4x75	12 / 144
CPHDS-AN0507	5x75	12 / 144
CPHDS-AN0607	6x75	12 / 144
CPHDS-AN0707	7x75	12 / 144
CPHDS-AN0807	8x75	12 / 144
CPHDS-AN0907	9x75	12 / 144
CPHDS-AN1007	10x75	12 / 144
CPHDS-AN1107	11x75	12 / 144
CPHDS-AN1207	12x75	12 / 144
CPHDS-AN1307	13x75	12 / 144

Pozidriv screwdrivers

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Size mm	pcs
CPHDS-APZ007	PZ0x75	12 / 240
CPHDS-APZ103	PZ1x38	12 / 240
CPHDS-APZ110	PZ1x100	12 / 240
CPHDS-APZ203	PZ2x38	12 / 240
CPHDS-APZ210	PZ2x100	12 / 120
CPHDS-APZ312	PZ3x125	12 / 96

Torx screwdrivers

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Size mm	pcs
CPHDS-AT0807	T8x75	12 / 240
CPHDS-AT1007	T10x75	12 / 240
CPHDS-AT1510	T15x100	12 / 240
CPHDS-AT2010	T20x100	12 / 240
CPHDS-AT2510	T25x100	12 / 120
CPHDS-AT2712	T27x125	12 / 120
CPHDS-AT3012	T30x125	12 / 120
CPHDS-AT4012	T40x125	12 / 120

Tamper torx screwdrivers

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Size mm	pcs
CPHDS-ATT0807	T8x75	12 / 240
CPHDS-ATT1007	T10x75	12 / 240
CPHDS-ATT1510	T15x100	12 / 240
CPHDS-ATT2010	T20x100	12 / 240
CPHDS-ATT2510	T25x100	12 / 120
CPHDS-ATT2712	T27x125	12 / 120
CPHDS-ATT3012	T30x125	12 / 120
CPHDS-ATT4012	T40x125	12 / 120

Dual function screwdrivers

- Chrome plated blade
- Bi-material handle



Product code	Size mm	pcs
CPHDR-ASPHA10	6,35x100 - SL5xPH1	12 / 72
CPHDR-ASPHA15	6,35x150 - SL5xPH1	12 / 72
CPHDR-ASPHB10	6,35x100 - SL6xPH2	12 / 72
CPHDR-ASPHB15	6,35x150 - SL6xPH2	12 / 72

6 in 1 Screwdriver set

- Chrome plated blade
- Bi-material handle



Product code

Contents



CPHDK-AXA6

- 6,35x65: PH1/SL5
- 8x75: PH2/SL6
- 1/4"x 5/16"

6 / 72

8 in 1 Screwdriver set

- Chrome plated blade
- Bi-material handle



Product code

Contents



CPHDK-AXA4

- 3 pcs slotted: SL3x65, SL5x65, SL6x65
- 3 pc phillips: PH0x65, PH1x65, PH2x65
- 5x65, 3x65

12/48

2 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code

Contents



CPHDS-AXA2

- 1 pcs slotted: 6x125
- 1 pc phillips: PH2x125

12/72

4 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code

Contents



CPHDS-AXA4

- 2 pcs slotted: 5x100, 6x150
- 1 pc phillips: PH1x100, PH2x150

12/72

6 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code

Contents



CPHDS-AX06

- 3 pcs slotted: 5x75, 5x100, 6x150
- 3 pcs phillips: PH1x75, PH1x100, PH2x150

6 / 24

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code

Contents




CPHDS-AXA6

- 4 pcs slotted: 4x100, 5x150, 6x100, 6x150
- 2 pcs phillips: PH1x100, PH2x150

6 / 24

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle

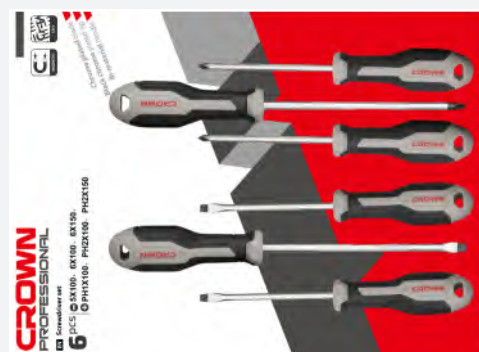

Product code

Contents



CPHDS-AXB6

- 3 pcs slotted: 5x100, 6x100, 6x150
- 3 pcs phillips: PH1x100, PH2x100, PH2x150

6 / 24

6 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Contents	pcs
CPHDS-ATX6	- 6 pcs torx: T10x75, T15x100, T20x100, T25x100, T27x125, T30x125	6 / 24

10 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Contents	pcs
CPHDS-AXA10	- 3 pcs slotted: 5x75, 5x100, 6x150 - 3 pcs phillips: PH1x75, PH1x100, PH2x150 - 4 pcs precision: 3x50, PH0x50, T6x50, T8x50	6 / 24

7 pcs Screwdrivers set

- Chrome plated blade
- Bi-material handle



Product code	Contents	pcs
CPHDS-ANX7	- 7 pcs nut: 6x75, 7x75, 8x75, 9x75, 10x75, 11x75, 12x75	6 / 24

18 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Contents	pcs
CPHDS-AXA18	- 8 pcs slotted: 1,5x50, 2x50, 2,5x50, 3x50, 5x75, 6x38, 6x100, 8x150 - 7 pcs phillips: PH000x50, PH00x50, PH0x50, PH1x75, PH2x38, PH2x100, PH3x150 - 3 pcs torx: T6x50, T8x50, T10x50	6 / 24

8 pcs Screwdrivers set

- Chrome plated blade
- Black chrome plated tip
- Bi-material handle



Product code	Contents	pcs
CPHDS-AX08	- 4 pcs slotted: 3x75, 5x100, 6x38, 6x150 - 4 pcs phillips: PH0x75, PH1x75, PH2x38, PH2x125	6 / 24

11 pcs Bit holder set

- Bi-material handle



Product code	Contents	pcs
CPHBH-AXA11	- 1 pcs bit holder - 3 pcs slotted: SL5, SL6, SL7 - 3 pcs phillips: PH1, PH2, PH3 - 4 pcs torx: T10, T15, T20, T25	6 / 72

11 pcs Flexible bit holder set


■ Bi-material handle



Product code	Contents	pcs
CPHBH-AXB11	- 1 pcs bit holder - 3 pcs slotted: SL5, SL6, SL7 - 3 pcs phillips: PH1, PH2, PH3 - 4 pcs torx: T10, T15, T20, T25	6 / 72

21 pcs Bit holder set


■ Bi-material handle

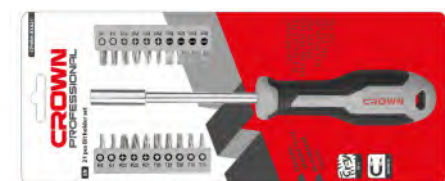

Product code	Contents	pcs
CPHBH-AXA21	- 1 pcs bit holder - 4 pcs slotted: SL3, SL4, SL5, SL6 - 4 pcs phillips: PH0, PH1, PH2, PH3 - 3 pcs pozidriv: PZ1, PZ2, PZ3 - 4 pcs hex: H2,5, H3, H4, H5 - 5 pcs torx: T10, T15, T20, T25, T30	6 / 48

55 pcs Bit holder set

■ Chrome plated blade
■ Bi-material handle



Product code	Contents	pcs
CPHBH-AXA55	- 21 pcs screwdriver bits 6,35x25 mm: SL4, SL5, SL6, PH1, PH2, PH2, PH3, PZ1, PZ2, PZ3, T10, T15, T20, T25, T30, T40, H3, H4, H5, H6 - 20 pcs precision bits: 4x28 mm: SL1,5, SL2, SL2,5, SL3, PH000, PH00, PH0, PH1, T6, T7, T8, T9, T10, T15, T20, H1,5, H2, H2,5, H3, H4 - 9 pcs sockets 1/4": 4, 5, 6, 7, 8, 9, 10, 11, 12 - 1 pc ratchet screwdriver - 1 pc bits adaptor 25 mm - 2pc bits holder 4x60 mm, 6,35x50 mm - 1 pc precision screwdriver	6 / 20

6 pcs Precision screwdrivers set

■ Chrome plated blade
■ Bi-material handle



Product code	Contents	pcs
CPHDP-AXA6	- 3 pcs slotted: 2x50, 2,5x50, 3x50 - 3 pcs phillips: PH0x50, PH00x50, PH000x50	12 / 48

■ Chrome plated blade
■ Bi-material handle



Product code	Contents	pcs
CPHDP-AXB6	- 4 pcs slotted: 1,4x50, 2x50, 2,4x50, 3x50 - 2 pcs phillips: PH0x50, PH00x50	12 / 48

■ Chrome plated blade
■ Bi-material handle



Product code	Contents	pcs
CPHDP-ATX6	- 6 pcs torx: T5x50, T6x50, T7x50, T8x50, T9x50, T10x50	12 / 48

■ Chrome plated blade
■ Bi-material handle



Product code	Contents	pcs
CPHDP-AXC6	- 2 pcs slotted: 2x50, 3x50 - 2 pcs phillips: PH0x50, PH00x50 - 2 pcs torx: T6x50, T8x50	12 / 48

7 pcs Precision screwdrivers set


- Chrome plated blade
- Bi-material handle



Product code	Contents	pcs
CPHDP-AXA7	- 3 pcs slotted: 2x50, 2,5x50, 3x50 - 2 pcs phillips: PH0x50, PH00x50 - 2 pcs torx: T6x50, T8x50	12 / 48

4 pcs Precision picks and hooks set

- Chrome plated blade
- Bi-material handle

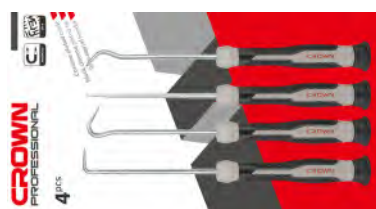

Product code	Contents	pcs
CPHDP-SCXA4	- 4 pcs straight head, elbow, 90°, 135°	6 / 96

8 pcs Offset key with handle set, Hex

- Chrome plated blade
- Bi-material handle



Product code	Contents	pcs
CPHOH-HMAX8	- 8 pcs: 2x75, 2,5x75, 3x100, 4x100, 5x150, 6x150, 8x200, 10x200	6 / 20

8 pcs Offset key with handle set, Hex ball head


- Chrome plated blade
- Bi-material handle



Product code	Contents	pcs
CPHOH-BMAX8	- 8 pcs: 2x75, 2,5x75, 3x100, 4x100, 5x150, 6x150, 8x200, 10x200	6 / 20

8 pcs Offset key with handle set, Tamper torx

- Chrome plated blade
- Bi-material handle

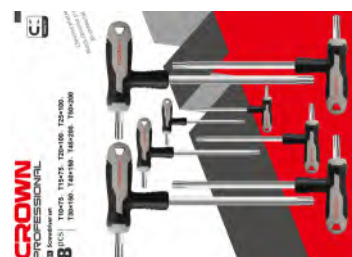

Product code	Contents	pcs
CPHOH-TTMAX8	- 8 pcs: T10x75, T15x75, T20x100, T25x100, T30x150, T40x150, T45x200, T50x200	6 / 20

9 pcs Hex key set

- Chrome plated



Product code	Size	pcs
CPHOK-HMAX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 48

9 pcs Hex key set, Long

- Chrome plated
- Long size



Product code	Size	pcs
CPHOK-HMBX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 36

9 pcs Hex key set, Extra long

- Chrome plated
- Extra long size



Product code	Size	pcs
CPHOK-HMCX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 24

9 pcs Hex key set, ball head

Chrome plated



Product code	Size mm	pcs
CPHOK-BMAX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 48

9 pcs Torx key set, Extra long

Chrome plated
Extra long size



Product code	Size	pcs
CPHOK-TMCX09	T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50	6 / 24

9 pcs Hex key set, ball head, Long

Chrome plated
Long size



Product code	Size mm	pcs
CPHOK-BMBX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 36

8 pcs Foldable hex key set

Chrome plated
Bi-material handle



Product code	Size	pcs
CPHOF-HMAX08	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 mm	12 / 48

9 pcs Hex key set, ball head, Extra long

Chrome plated
Extra long size



Product code	Size mm	pcs
CPHOK-BMCX09	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 8 / 10 mm	6 / 24

8 pcs Foldable hex key set, ball head

Chrome plated
Bi-material handle



Product code	Size	pcs
CPHOF-BMAX08	1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 mm	12 / 48

9 pcs Torx key set

Chrome plated
Long size



Product code	Size	pcs
CPHOK-TMAX09	T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50	6 / 48

9 pcs Torx key set, Long

Chrome plated
Long size



Product code	Size	pcs
CPHOK-TMBX09	T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50	6 / 36

8 pcs Foldable torx key set

Chrome plated
Bi-material handle



Product code	Size	pcs
CPHOF-TMAX08	T9 / T10 / T15 T20 / T25 / T27 T30 / T40	12 / 48










Universal joints



Gr-V
CR-V

Product code	Size	pcs
CPHSW-UJA14	1/4"	12 / 48
CPHSW-UJA38	3/8"	12 / 48
CPHSW-UJA12	1/2"	12 / 48

Extension bars

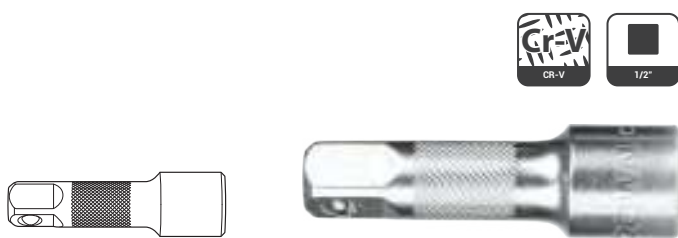


Gr-V
CR-V

1/2"

Product code	Size	pcs
CPHSW-EB1203	1/2" x 75 mm	12 / 48
CPHSW-EB1205	1/2" x 125 mm	12 / 72
CPHSW-EB1210	1/2" x 250 mm	6 / 36

Spark plug sockets

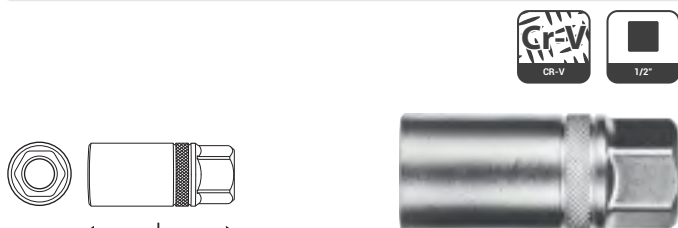

Gr-V
CR-V

1/2"

L

Product code	Size	L mm	pcs
CPHSW-HP1216	1/2"	16	12 / 48
CPHSW-HP1221	1/2"	21	12 / 48

Adapters



Gr-V
CR-V

Product code	Size	pcs
CPHSW-AD3814	3/8" x 1/4"	12 / 48
CPHSW-AD3812	3/8" x 1/2"	12 / 48
CPHSW-AD1238	1/2" x 3/8"	12 / 48

Claw hammers (fiberglass handle)



Black finishing
Ergonomic handle
Fiberglass handle

CARBON STEEL

Product code	oz	pcs
CPHHC-FHA08	8	6 / 48
CPHHC-FHA12	12	6 / 36
CPHHC-FHA16	16	6 / 24
CPHHC-FHA20	20	6 / 24

Claw hammers (wooden handle)



Black finishing
Green oak wood handle

CARBON STEEL

Product code	oz	pcs
CPHHC-WHA08	8	6 / 48
CPHHC-WHA16	16	6 / 36

Mechanic's hammers (fiberglass handle)



Black finishing
Ergonomic handle
Fiberglass handle

CARBON STEEL

Product code	g	pcs
CPHHM-FHA10	100	12 / 120
CPHHM-FHA20	200	6 / 60
CPHHM-FHA30	300	6 / 36
CPHHM-FHA40	400	6 / 36
CPHHM-FHA50	500	6 / 24
CPHHM-FHA60	600	6 / 24
CPHHM-FHA80	800	6 / 24
CPHHM-FHA100	1000	6 / 18
CPHHM-FHA150	1500	6 / 12

Mechanic's hammers (wooden handle)



Black finishing
Green oak wood handle

CARBON STEEL

Product code	g	pcs
CPHHM-WHA30	300	6 / 36
CPHHM-WHA40	400	6 / 36
CPHHM-WHA50	500	6 / 24
CPHHM-WHA60	600	6 / 24
CPHHM-WHA80	800	6 / 24
CPHHM-WHA100	1000	6 / 18

Ball peen hammers (fiberglass handle)

- Ergonomic handle
- Fiberglass handle



Product code	oz	pcs
CPHHB-FHA08	8	6 / 72
CPHHB-FHA12	12	6 / 48
CPHHB-FHA16	16	6 / 36
CPHHB-FHA24	24	6 / 24
CPHHB-FHA32	32	6 / 18
CPHHB-FHA40	40	6 / 12

White rubber mallets (fiberglass handle)

- Ergonomic handle
- Fiberglass handle



Product code	oz	pcs
CPHHR-FHA08	8	6 / 36
CPHHR-FHA16	16	6 / 24

Ball peen hammers (wooden handle)

- Green oak wood handle



Product code	oz	pcs
CPHHB-WHA08	8	6 / 72
CPHHB-WHA12	12	6 / 48
CPHHB-WHA16	16	6 / 36
CPHHB-WHA24	24	6 / 24
CPHHB-WHA32	32	6 / 18
CPHHB-WHA40	40	6 / 12

White rubber mallets (wooden handle)

- Wooden handle



Product code	oz	pcs
CPHHR-WHA08	8	6 / 36
CPHHR-WHA16	16	6 / 36

Lump hammers (fiberglass handle)

- Black finishing
- Ergonomic handle
- Fiberglass handle



Product code	g	pcs
CPHHL-FHA100	1000	6 / 24
CPHHL-FHA125	1250	6 / 18
CPHHL-FHA150	1500	6 / 12

Black rubber mallets (fiberglass handle)

- Ergonomic handle
- Fiberglass handle



Product code	oz	pcs
CPHHR-FHB08	8	6 / 36
CPHHR-FHB16	16	6 / 24

Lump hammers (wooden handle)

- Black finishing
- Green oak wood handle



Product code	g	pcs
CPHHL-WHA100	1000	6 / 24
CPHHL-WHA125	1250	6 / 18
CPHHL-WHA150	1500	6 / 12

Black rubber mallets (wooden handle)

- Wooden handle



Product code	oz	pcs
CPHHR-WHB08	8	6 / 36
CPHHR-WHB16	16	6 / 36

Black and white rubber mallets (fiberglass handle)

- Ergonomic handle
- Fiberglass handle



Product code	oz	pcs
CPHHR-FHC08	8	6 / 36
CPHHR-FHC16	16	6 / 24

Pointed chisel with hand guard

- Safety guard
- Bi-material handle



Product code	Size	pcs
CPHHK-CPA12	16x300 mm / 5/8"x1/2"	6 / 24

Black and white rubber mallets (wooden handle)

- Wooden handle



Product code	oz	pcs
CPHHR-WHC08	8	6 / 36
CPHHR-WHC16	16	6 / 36

Flat chisel with hand guard

- Safety guard
- Bi-material handle



Product code	Size	A mm	pcs
CPHHK-CFA12	16x300 mm / 5/8"x1/2"	20	6 / 24

Dual rubber mallets (fiberglass handle)

- Interchangeable head
- Ergonomic handle
- Fiberglass handle



Product code	Ø mm	pcs
CPHHF-FHA30	30	4 / 48
CPHHF-FHA35	35	4 / 36
CPHHF-FHA40	40	6 / 24

Hack saw

- Aluminum body
- 12"/300 mm bi-metallic blade 24 TPI
- Comfort grip



Product code	L mm / inch	pcs
CPHSH-FXA12	12" / 300	12 / 48

Dead blow mallets

- Steel balls anti-rebound



Product code	lb	pcs
CPHHD-SHA16	1	6 / 24
CPHHD-SHA24	1,5	6 / 24
CPHHD-SHA32	2	6 / 24

Hack saw

- Aluminum body
- 12"/300 mm carbon steel blade 24 TPI
- Bi-material handle



Product code	L mm / inch	pcs
CPHSH-FXB12	12" / 300	6 / 24

Hand saws

- Induction hardened
- Bi-material handle



Product code	L inch / mm	pcs
CPHSD-BIA16	16" / 400	10 / 40
CPHSD-BIA20	20" / 500	10 / 40

Pruning saw

- Induction hardened
- Bi-material handle
- Plastic knife sheath included



Product code	L inch / mm	pcs
CPHSP-STA10	10" / 270	24 / 48

Pruner

- Teflon coated
- Bi-material handle



Product code	L inch / mm	Max. cutting Ø mm	pcs
CPHSS-PRA08	8" / 200	20	20 / 40

Pruning saw

- Induction hardened
- Bi-material handle



Product code	L inch / mm	pcs
CPHSP-STB12	12" / 300	24 / 48

Foldable pruning saw

- Induction hardened
- Anti-rust varnished
- Bi-material handle



Product code	L inch / mm	pcs
CPHSP-FDA07	7" / 180	20 / 40


Pipe cutter



Product code	Pipe Ø mm	pcs
CPHSC-PCA42	42	10 / 60

Pipe cutter

- Teflon coating
- Bi-material handle

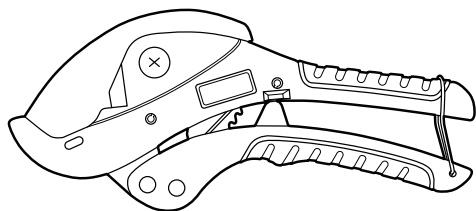

Product code	Pipe Ø mm	pcs
CPHSC-PCB42	42	6 / 36

Small axe (Wooden handle)

- Blck finishing
- Hickory wood handle



Product code	lb	pcs
CPHSA-SWA20	1,5	6 / 24

Small axe (Wooden handle)


- Blck finishing
- Hickory wood handle



Product code	g	pcs
CPHSA-SWB60	600	6 / 24

Bolt cutters

- UHF heat treatment
- Comfort grip

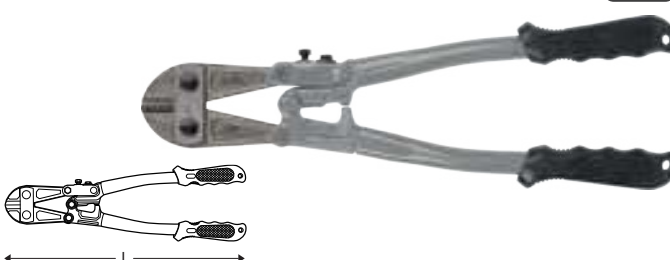

Product code	L inch / mm	Max, cutting ability Ø mm	pcs
CPHSC-BCA12	12 / 300	5	1 / 30
CPHSC-BCA14	14 / 350	7	1 / 30
CPHSC-BCA18	18 / 450	8	1 / 20
CPHSC-BCA24	24 / 600	10	1 / 10
CPHSC-BCA30	30 / 750	13	1 / 5
CPHSC-BCA36	36 / 900	16	1 / 5
CPHSC-BCA42	42 / 1050	19	1 / 3
CPHSC-BCA48	48 / 1200	22	1 / 3

Snap-off knives

- Metal guide rail
- Comfort grip



Product code	W mm	pcs
CPHKN-SOA09	9	12 / 240
CPHKN-SOA18	18	12 / 144

Snap-off knives


- Metal guide rail
- Comfort grip



Product code	W mm	pcs
CPHKN-SBB18	18	12 / 144

2 pcs snap-off knives

- Aluminum alloy body

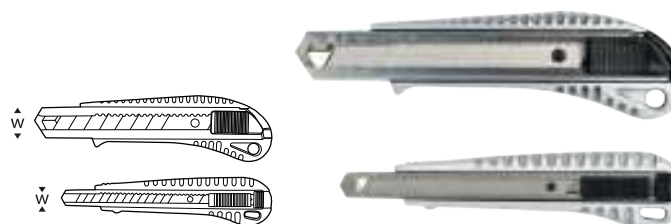

Product code	W mm	pcs
CPHKN-SOXD2	2pcs: 9mm / 18mm	12 / 96

Snap-off knives

- Zinc alloy body
- Magnetic
- Comfort grip



Product code	W mm	pcs
CPHKN-SOC09	9	12 / 144
CPHKN-SOC18	18	12 / 96
CPHKN-SOC25	25	6 / 60

Retractable knife

- Zinc alloy body
- Fast blade replacement
- String cuttign groove
- Comfort grip



Product code	L inch / mm	pcs
CPHKN-RTA6	6" / 150	6 / 72

Retractable knife


■ Zinc alloy body



Product code	L inch / mm	pcs
CPHKN-RTB6	6" / 150	12 / 144

Foldable knife

■ Foldable knife
■ Safe lock
■ Fast blade replacement
■ Aluminum alloy body



Product code	L inch / mm	pcs
CPHKN-FBA6	6" / 150	12 / 72

Snap-off knife blades



Product code	Qty	W mm	pcs
CPHKB-X2009	2x10pcs	9	12 / 96
CPHKB-X2018	2x10pcs	18	6 / 72

Trapezoidal blades



Product code	Qty	L mm	pcs
CPHKB-X20T1	2x10pcs	62	6 / 72


Tin snips



Product code	L inch / mm	pcs
CPHSS-SNA08	8" / 200	6 / 50
CPHSS-SNA10	10" / 250	6 / 36
CPHSS-SNA12	12" / 300	6 / 24

Measuring tapes (double scale)


■ Pocket clip
■ Patented design
■ Comfort grip

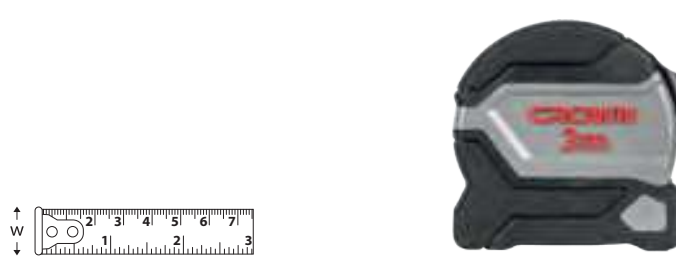

Product code	Max. length m	W mm	pcs
CPHMT-AD0316	3	16	12 / 144
CPHMT-AD0519	5	19	12 / 96
CPHMT-AD0525	5	25	12 / 72

Measuring tapes (metric)

■ Pocket clip
■ Patented design
■ Comfort grip

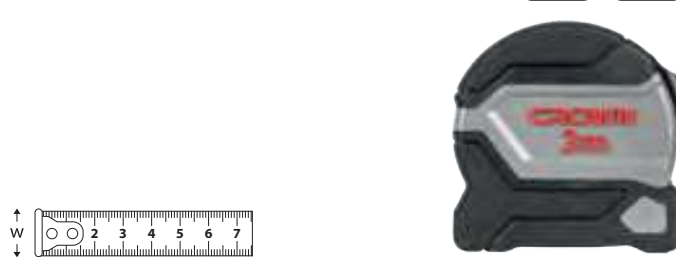

Product code	Max. length m	W mm	pcs
CPHMT-AM0316	3	16	12 / 144
CPHMT-AM0519	5	19	12 / 96
CPHMT-AM0525	5	25	12 / 72

Open reel fiberglass measuring tapes


■ Fiberglass tape



Product code	Max. length m	W mm	pcs
CPHMT-OFA30	30	13	1 / 20
CPHMT-OFA50	50	13	1 / 10

Long fiberglass measuring tapes

Fiberglass tape



Product code	Max. length m	W mm	 /  pcs
CPHMT-LFA20	20	13	1 / 24
CPHMT-LFA30	30	13	1 / 24

Quick ratchet clamps

45# steel bar
Bi-material handle



Product code	L inch / mm	 /  pcs
CPHFC-LCA06	6" / 160	6 / 24
CPHFC-LCA12	12" / 300	6 / 24
CPHFC-LCA18	18" / 450	6 / 24
CPHFC-LCA24	24" / 600	4 / 24
CPHFC-LCA36	36" / 900	6 / 12

Spirit levels

Accuracy 0,5mm/m
90° Plumb site
Single milled edge
Shock absorbing end caps
Comfort grip




CPHML-SPA03



CPHML-SPA04 - CPHML-SPA06




CPHML-SPA08 - CPHML-SPA20



Product code	L mm	vesicle	 /  pcs
CPHML-SPA03	300	2	1 / 40
CPHML-SPA04	400	3	1 / 40
CPHML-SPA05	500	3	1 / 40
CPHML-SPA06	600	3	1 / 30
CPHML-SPA08	800	3	1 / 30
CPHML-SPA10	1000	3	1 / 20
CPHML-SPA12	1200	3	1 / 20
CPHML-SPA15	1500	3	1 / 10
CPHML-SPA18	1800	3	1 / 10
CPHML-SPA20	2000	3	1 / 10

Standard clamps

Movable foot
Passivated surface

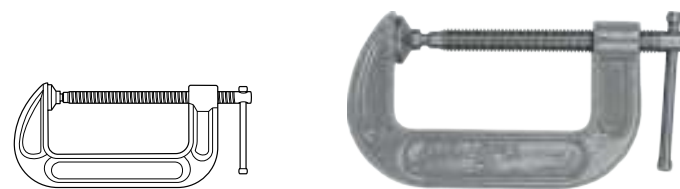

Product code	Max. opening inch / mm	 /  pcs
CPHFC-GCA04	4" / 100	6 / 36
CPHFC-GCA05	5" / 130	6 / 30
CPHFC-GCA06	6" / 160	6 / 24

NOTES

NOTES



MERIT LINK

Hardware tools and equipment

ZHEJIANG CROWN POWER TOOLS MANU CO,LTD,
636 JIUFENG STREET JINHUA INDUSTRIAL ZONE

ZHEJIANG
CHINA

 www.crowntools.com

 info@merit-link.com

 market@crown-tools.com

 For more information visit
www.crown-tools.com

Distributed by:

